


Automotive Cable

AVSSH

Application:

This PVC insulated single-core cable is used for automobiles, vehicles and Motorcycles.

Construction:

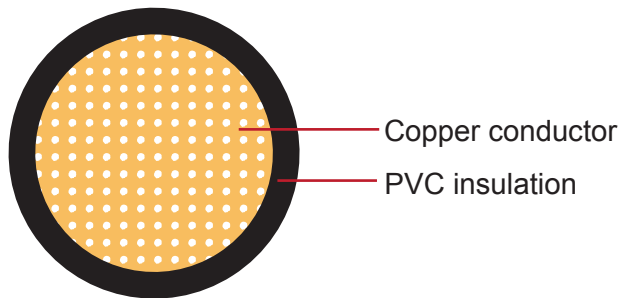

Conductor: Stranded ,bare copper

Insulation: PVC

Standard Compliance: JASO D 611-09 JASO D608

Technical Parameters:

Operating temperature: -40 °C to +100 °C

Rated voltage: 25VA and 60 VDC

Nominal Cross-section	Conductor			Insulation Thickness Wall nom. mm	Cable		Weight Approx. kg/km
	NO. and Dia. of Wires	Diameter max.	Electrical Resistance at 20°C max.		Overall Diameter min.	Overall Diameter max.	
mm ²	no./mm	mm	mΩ/m	mm	mm	mm	kg/km
1x0.3f	19/0.16	0.8	48.6	0.3	1.4	1.5	5
1x0.5f	19/0.16	1.0	34.6	0.3	1.6	1.7	7
1x0.75f	19/0.23	1.2	23.6	0.3	1.8	1.9	10
1x1.25f	37/0.21	1.5	14.6	0.3	2.1	2.2	14

The "f" in the nominal size column indicates a flexile conductor with a fine wire diameter.

*Note: Other configurations, sizes, colors and length not specified herein are available upon request.