



Caledonian

BELDEN
EQUIVALENT CABLES

 **ADDISON**

www.caledonian-cables.co.uk

www.addison-cables.com



Table of Content

Table of Content

Multicore Overall Screened Cables

Multicore Overall Screened Cables-Belden Equivalent 9533.....	7
Multicore Overall Screened Cables-Belden Equivalent 9534.....	8
Multicore Overall Screened Cables-Belden Equivalent 9535.....	9
Multicore Overall Screened Cables-Belden Equivalent 9536.....	10
Multicore Overall Screened Cables-Belden Equivalent 9537.....	11
Multicore Overall Screened Cables-Belden Equivalent 9538.....	12
Multicore Overall Screened Cables-Belden Equivalent 9539.....	13
Multicore Overall Screened Cables-Belden Equivalent 9540.....	14
Multicore Overall Screened Cables-Belden Equivalent 9541.....	15
Multicore Overall Screened Cables-Belden Equivalent 9542.....	16
Multicore Overall Screened Cables-Belden Equivalent 9543.....	17
Multicore Overall Screened Cables-Belden Equivalent 9544.....	18
Multicore Overall Screened Cables-Belden Equivalent 9545.....	19
Multicore Overall Screened Cables-Belden Equivalent 9546.....	20
Multicore Overall Screened Cables-Belden Equivalent 9418.....	21
Multicore Overall Screened Cables-Belden Equivalent 8735.....	22
Multicore Overall Screened Cables-Belden Equivalent 9260.....	23
Multicore Overall Screened Cables-Belden Equivalent 9261.....	24
Multicore Overall Screened Cables-Belden Equivalent 8771.....	25
Multicore Overall Screened Cables-Belden Equivalent 8729.....	26
Multicore Overall Screened Cables-Belden Equivalent 8772.....	27
Multicore Overall Screened Cables-Belden Equivalent 8770.....	28
Multicore Overall Screened Cables-Belden Equivalent 8618.....	29
Multicore Overall Screened Cables-Belden Equivalent 9770.....	30

Multicore Overall Foil & Braid Screened Cables

Multicore Overall Foil & Braid Screened Cables-Belden Equivalent 9791	31
---	----

Multicore Unscreened Armoured Cables

Multicore Unscreened Armoured Cables-Belden Equivalent 28271	32
Multicore Unscreened Armoured Cables-Belden Equivalent 28538	33

Multipair Overall Screened Cables



Table of Content

Cat 6 Cable, SF/UTP-Belden Equivalent 7860ENS	34
Single Pair Overall Screen-Belden Equivalent 5200FE	35
Multipair Overall Screened Cables-Belden Equivalent 9501	37
Multipair Overall Screened Cables-Belden Equivalent 9502	38
Multipair Overall Screened Cables-Belden Equivalent 9503	39
Multipair Overall Screened Cables-Belden Equivalent 9504	40
Multipair Overall Screened Cables-Belden Equivalent 9505	41
Multipair Overall Screened Cables-Belden Equivalent 9506	42
Multipair Overall Screened Cables-Belden Equivalent 9507	43
Multipair Overall Screened Cables-Belden Equivalent 9508	44
Multipair Overall Screened Cables-Belden Equivalent 9509	45
Multipair Overall Screened Cables-Belden Equivalent 9510	46
Multipair Overall Screened Cables-Belden Equivalent 9515	47
Multipair Overall Screened Cables-Belden Equivalent 9519	48
Multipair Overall Screened Cables-Belden Equivalent 9525	49
Multipair Overall Screened Cables-Belden Equivalent 8441	50
Multipair Overall Screened Cables-Belden Equivalent 9302	51
Multipair Overall Screened Cables-Belden Equivalent 9305	52
Multipair Overall Screened Cables-Belden Equivalent 9306	53
Multipair Overall Screened Cables-Belden Equivalent 9309	54
Multipair Overall Screened Cables-Belden Equivalent 9315	55
Multipair Overall Screened Cables-Belden Equivalent 9319	56
Multipair Overall Screened Cables-Belden Equivalent 9327	57
Multipair Overall Screened Cables-Belden Equivalent 9154	58
Multipair Overall Screened Cables-Belden Equivalent 9680	59
Multipair Overall Screened Cables-Belden Equivalent 9681	60
Multipair Overall Screened Cables-Belden Equivalent 9682	61
Multipair Overall Screened Cables-Belden Equivalent 9683	62
Multipair Overall Screened Cables-Belden Equivalent 9684	63
Multipair Overall Screened Cables-Belden Equivalent 8641	64
Multipair Overall Screened Cables-Belden Equivalent 8761	65
Multipair Overall Screened Cables-Belden Equivalent 8762	66
Multipair Overall Screened Cables-Belden Equivalent 8760	67
Multipair Overall Screened Cables-Belden Equivalent 8719	68



Caledonian Belden Equivalent Cables

Table of Content

Multipair Overall Screened Cables-Belden Equivalent 8720 69

Multipair Overall Screened Armoured Cables

Multipair Overall Screened Cables-Belden Equivalent 8718 70
Multipair Overall Screened Cables-Belden Equivalent 8451 71
Multipair Overall Screened Armoured Cables-Belden Equivalent 26500 72

Multipair Individually Screened Cables

Multipair Overall Screened Armoured Cables-Belden Equivalent 26503 73
Multipair Overall Screened Armoured Cables-Belden Equivalent 26514 74
Multipair Individually Screened Cables-Belden Equivalent 8723 75
Multipair Individually Screened Cables-Belden Equivalent 8777 76
Multipair Individually Screened Cables-Belden Equivalent 8764 77
Multipair Individually Screened Cables-Belden Equivalent 8765 78
Multipair Individually Screened Cables-Belden Equivalent 8766 79
Multipair Individually Screened Cables-Belden Equivalent 8778 80
Multipair Individually Screened Cables-Belden Equivalent 8774 80
Multipair Individually Screened Cables-Belden Equivalent 8775 79
Multipair Individually Screened Cables-Belden Equivalent 8776 82
Multipair Individually Screened Cables-Belden Equivalent 8773 83
Multipair Individually Screened Cables-Belden Equivalent 9873 84
Multipair Individually Screened Cables-Belden Equivalent 9874 85
Multipair Individually Screened Cables-Belden Equivalent 9875 86
Multipair Individually Screened Cables-Belden Equivalent 9876 87
Multipair Individually Screened Cables-Belden Equivalent 9877 88
Multipair Individually Screened Cables-Belden Equivalent 9879 89
Multipair Individually Screened Cables-Belden Equivalent 9773 90
Multipair Individually Screened Cables-Belden Equivalent 9774 89
Multipair Individually Screened Cables-Belden Equivalent 9775 91
Multipair Individually Screened Cables-Belden Equivalent 9776 92
Multipair Individually Screened Cables-Belden Equivalent 9777 93
Multipair Individually Screened Cables-Belden Equivalent 9729 94
Multipair Individually Screened Cables-Belden Equivalent 9730 94
Multipair Individually Screened Cables-Belden Equivalent 9728 95
Multipair Individually Screened Cables-Belden Equivalent 9731 96
Multipair Individually Screened Cables-Belden Equivalent 9732 97



Table of Content

Multipair Individually Screened Cables-Belden Equivalent 9733	98
Multipair Individually Screened Cables-Belden Equivalent 9734	99
Multipair Individually Screened Cables-Belden Equivalent 9735	100
Multipair Individually Screened Cables-Belden Equivalent 9736	101

Multipair Overall Foil & Braid Screened Cables

Multipair Individually Screened Cables-Belden Equivalent 9737	102
Multipair Individually Screened Cables-Belden Equivalent 9738	103
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8332	104
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8333	105
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8334	106
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8335	107
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8336	108
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8337	109
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8340	110
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8342	111
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8345	112
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8355	113
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8302	114
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8303	115
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8304	116
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8305	117
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8306	118
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8307	119
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8310	120
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8315	121
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8325	122
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9841	123
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9842	124
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9843	125
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9844	126
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9829	127
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9830	128
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9831	129
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9832	130



Caledonian Belden Equivalent Cables

Table of Content

Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9833.....	131
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9835.....	132
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9836.....	133
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9837.....	134
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9838.....	135
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9855.....	136
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8102	137
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8105	138
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8110	139

Multipair Individually and Overall Screened Cables

Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8115.....	140
Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8125.....	141
Multipair Individually and Overall Screened Cables-Belden Equivalent 8162	142
Multipair Individually and Overall Screened Cables-Belden Equivalent 8163	143
Multipair Individually and Overall Screened Cables-Belden Equivalent 8164	144
Multipair Individually and Overall Screened Cables-Belden Equivalent 8165	145
Multipair Individually and Overall Screened Cables-Belden Equivalent 8166	146
Multipair Individually and Overall Screened Cables-Belden Equivalent 8167	147
Multipair Individually and Overall Screened Cables-Belden Equivalent 8168	148
Multipair Individually and Overall Screened Cables-Belden Equivalent 8170	149
Multipair Individually and Overall Screened Cables-Belden Equivalent 8175	150

Multipair Unscreened Cables

Multipair Individually and Overall Screened Cables-Belden Equivalent 8178	151
---	-----

Special Belden Equivalent Cables

Multipair Individually and Overall Screened Cables-Belden Equivalent 8185	152
Multipair Unscreened Cables-Belden Equivalent 8471	153
FR Multipair Unscreened Cables-FR Belden Equivalent 8471	154
FR Multipair Overall Screened Cables-FR Belden Equivalent 8719.....	156



Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9533

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.

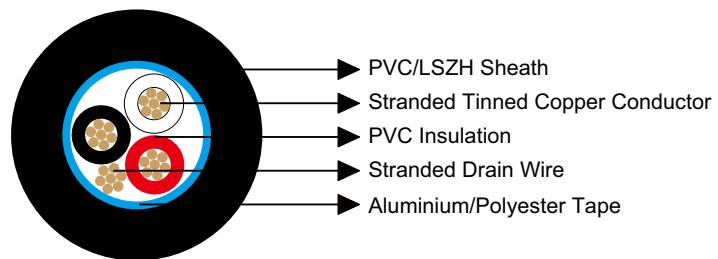

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	108
Nominal Capacitance Conductor to Screen	pF/m	213
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE119533V	3	0.25	0.81	4.1
BE119533H	3	0.25	0.81	4.1



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables

Multicore Overall Screened Cables-Belden Equivalent 9534

» Application


These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green.

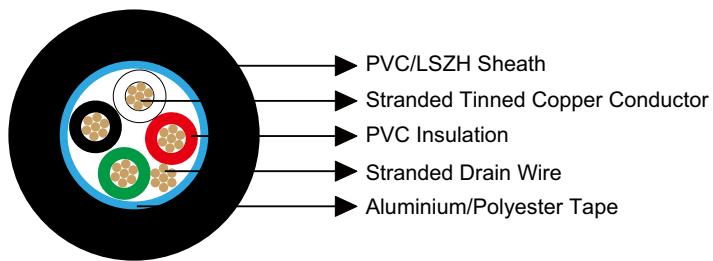

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	108
Nominal Capacitance Conductor to Screen	pF/m	213
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119534V	4	0.25	0.81	4.7
BE119534H	4	0.25	0.81	4.7



Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9535

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Brown.

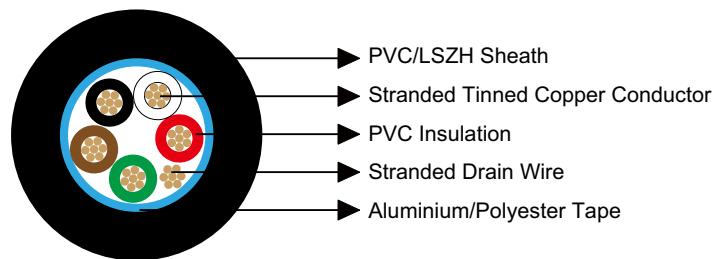

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	108
Nominal Capacitance Conductor to Screen	pF/m	213
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119535V	5	0.25	0.81	4.8
BE119535H	5	0.25	0.81	4.8



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9536

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Brown, Blue.

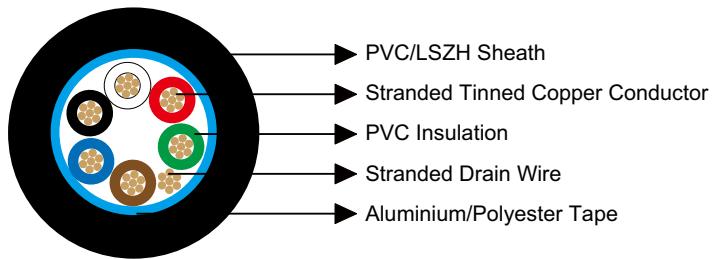

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	108
Nominal Capacitance Conductor to Screen	pF/m	213
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE119536V	6	0.25	0.81	5.3
BE119536H	6	0.25	0.81	5.3



Multicore Overall Screened Cables

Multicore Overall Screened Cables-Belden Equivalent 9537

» Application


These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Brown, Blue, Orange.

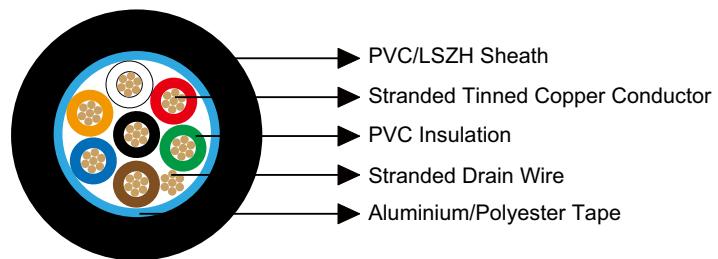

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	108
Nominal Capacitance Conductor to Screen	pF/m	213
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119537V	7	0.25	0.81	5.3
BE119537H	7	0.25	0.81	5.3



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables

Multicore Overall Screened Cables-Belden Equivalent 9538

» Application


These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Brown, Blue, Orange, Yellow.

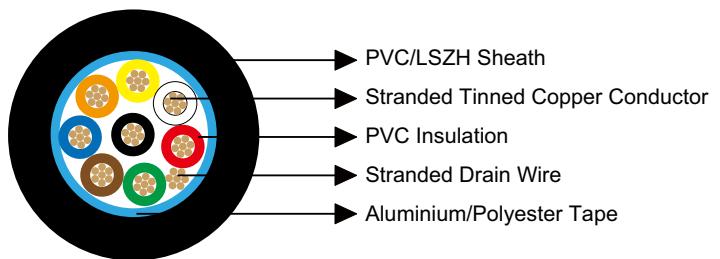

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	108
Nominal Capacitance Conductor to Screen	pF/m	213
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119538V	8	0.25	0.81	5.7
BE119538H	8	0.25	0.81	5.7



Multicore Overall Screened Cables

Multicore Overall Screened Cables-Belden Equivalent 9539

» Application


These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Brown, Blue, Orange, Yellow, Purple.

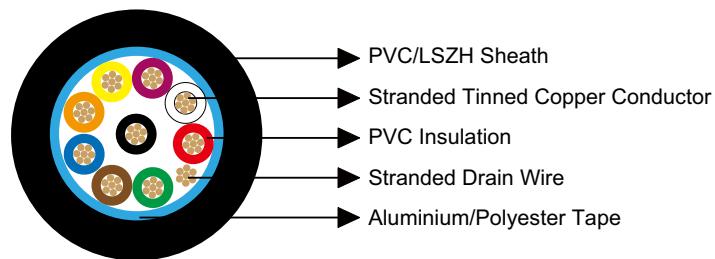

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119539V	9	0.25	0.81	6.2
BE119539H	9	0.25	0.81	6.2



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables

Multicore Overall Screened Cables-Belden Equivalent 9540

» Application


These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Brown, Blue, Orange, Yellow, Purple, Gray.

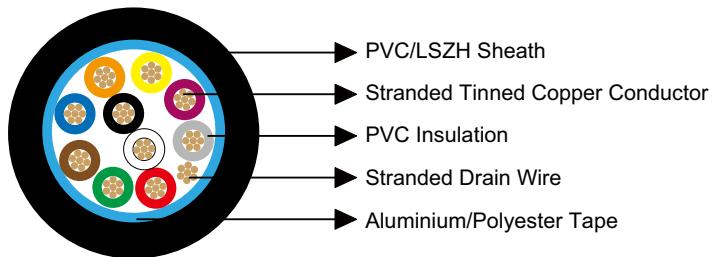

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119540V	10	0.25	0.81	6.2
BE119540V	10	0.25	0.81	6.2



Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9541

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.

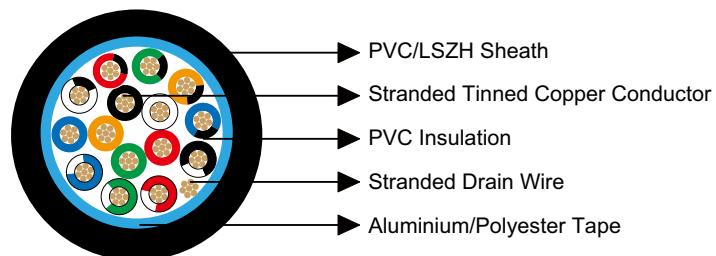

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Orange, Blue, White/Black, Red/Black, Green/Black, Orange/Black, Blue/Black, Black/White, Red/White, Green/White, Blue/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119541V	15	0.25	0.81	7.2
BE119541V	15	0.25	0.81	7.2



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables

Multicore Overall Screened Cables-Belden Equivalent 9542

» Application


These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Orange, Blue, White/Black, Red/Black, Green/Black, Orange/Black, Blue/Black, Black/White, Red/White, Green/White, Blue/White, Black/Red, White/Red, Orange/Red, Blue/Red, Red/Green.

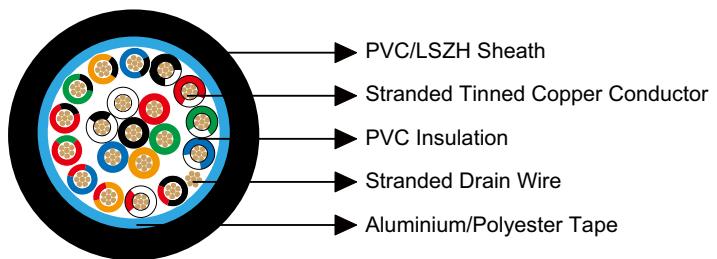

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119542V	20	0.25	0.81	8.0
BE119542V	20	0.25	0.81	8.0



Multicore Overall Screened Cables

Multicore Overall Screened Cables-Belden Equivalent 9543

» Application


These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Orange, Blue, White/Black, Red/Black, Green/Black, Orange/Black, Blue/Black, Black/White, Red/White, Green/White, Blue/White, Black/Red, White/Red, Orange/Red, Blue/Red, Red/Green, Orange/Green, Black/White/Red, White/Black/Red, Red/Black/White, Green/Black/White.

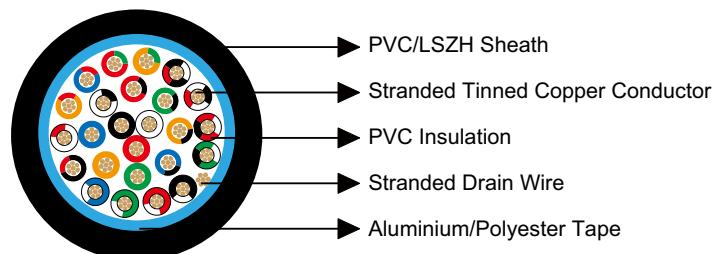

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119543V	25	0.25	0.81	8.6
BE119543V	25	0.25	0.81	8.6



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9544

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.

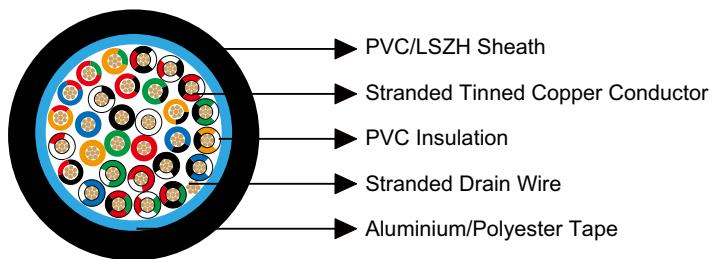

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Orange, Blue, White/Black, Red/Black, Green/Black, Orange/Black, Blue/Black, Black/White, Red/White, Green/White, Blue/White, Black/Red, White/Red, Orange/Red, Blue/Red, Red/Green, Orange/Green, Black/White/Red, White/Black/Red, Red/Black/White, Green/Black/White, Orange/Black/White, Blue/Black/White, Black/Red/Green, White/Red/Green, Red/Black/Green.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	181
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE119544V	30	0.25	1.02	9.7
BE119544H	30	0.25	1.02	9.7



Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9545

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.

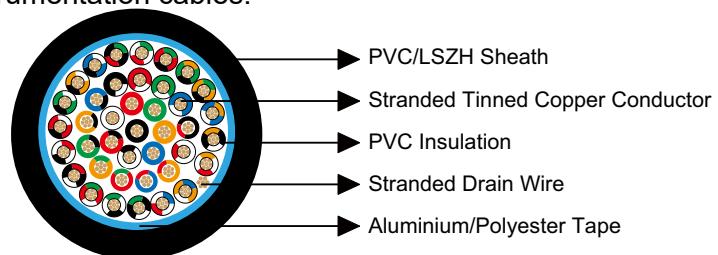

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Orange, Blue, White/Black, Red/Black, Green/Black, Orange/Black, Blue/Black, Black/White, Red/White, Green/White, Blue/White, Black/Red, White/Red, Orange/Red, Blue/Red, Red/Green, Orange/Green, Black/White/Red, White/Black/Red, Red/Black/White, Green/Black/White, Orange/Black/White, Blue/Black/White, Black/Red/Green, White/Red/Green, Red/Black/Green, Green/Black/Orange, Orange/Black/Green, Blue/White/Orange, Black/White/Orange, White/Red/Orange, Orange/White/Blue, White/Red/Blue, Black/White/Green, White/Black/Green, Red/White/Green.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE119545V	40	0.25	1.02	10.3
BE119545H	40	0.25	1.02	10.3



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9546

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.

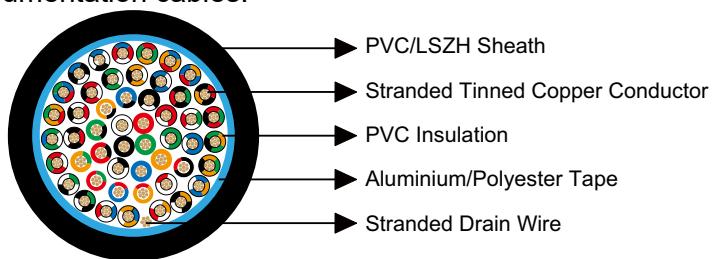

- » Drain Wire: Stranded tinned copper, 7x0.20.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Orange, Blue, White/Black, Red/Black, Green/Black, Orange/Black, Blue/Black, Black/White, Red/White, Green/White, Blue/White, Black/Red, White/Red, Orange/Red, Blue/Red, Red/Green, Orange/Green, Black/White/Red, White/Black/Red, Red/Black/White, Green/Black/White, Orange/Black/White, Blue/Black/White, Black/Red/Green, White/Red/Green, Red/Black/Green, Green/Black/Orange, Orange/Black/Green, Blue/White/Orange, Black/White/Orange, White/Red/Orange, Orange/White/Blue, White/Red/Blue, Black/White/Green, White/Black/Green, Red/White/Green, Green/White/Blue, Orange/Red/Green, Blue/Red/Green, Black/White/Blue, White/Black/Blue, Red/White/Blue, Green/Orange/Red, Orange/Red/Blue, Blue/Red/Orange, Black/Orange/Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.20
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE119546V	50	0.25	1.14	12.5
BE119546V	50	0.25	1.14	12.5



Multicore Overall Screened Cables

Multicore Overall Screened Cables-Belden Equivalent 9418

» Application


These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Stranded tinned copper.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Red, Green, Black, White.

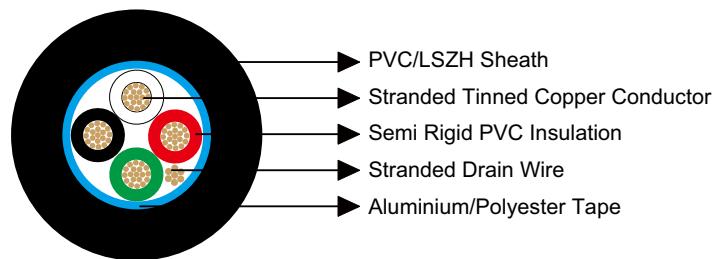

» Electrical & Mechanical Characteristics

AWG		18
Conductor Construction		19x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	23
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	131
Nominal Capacitance Conductor to Screen	pF/m	236
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119418V	4	0.28	0.89	6.2
BE119418H	4	0.28	0.89	6.2



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 8735

» Application

These multicore overall screened cables have individually insulated cores laid up in a tinned copper braid screen, suitable for used as communication and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Tinned copper braid, 70% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Red, White.

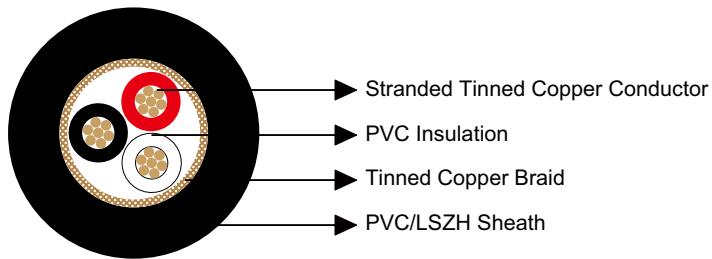

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2095
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	112
Nominal Capacitance Conductor to Screen	pF/m	197
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE118735V	3	0.38	0.64	5.1
BE118735H	3	0.38	0.64	5.1



Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9260

» Application

These multicore overall screened cables have individually insulated cores laid up in a tinned copper braid screen, suitable for used as control cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Tinned copper braid, 85% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Orange, Blue.

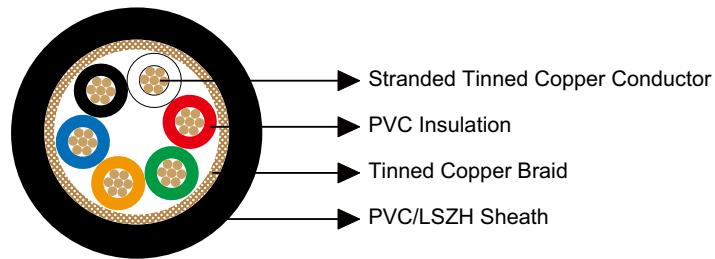

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2464
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	85
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE119260V	6	0.41	0.81	7.8
BE119260H	6	0.41	0.81	7.8



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9261

» Application

These multicore overall screened cables have individually insulated cores laid up in a tinned copper braid screen, suitable for used as control cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Tinned copper braid, 85% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Orange, Blue, White/Black, Red/Black, Green/Black, Orange/Black, Blue/Black, Black/White.

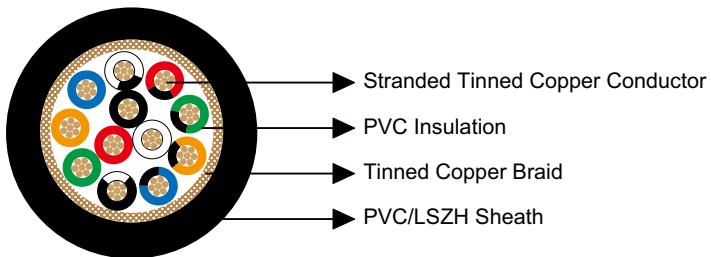

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2464
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	85
Nominal Capacitance Conductor to Screen	pF/m	187
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119261V	12	0.41	1.02	10.1
BE119261H	12	0.41	1.02	10.1



Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 8771

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Stranded tinned copper.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Red, Clear.

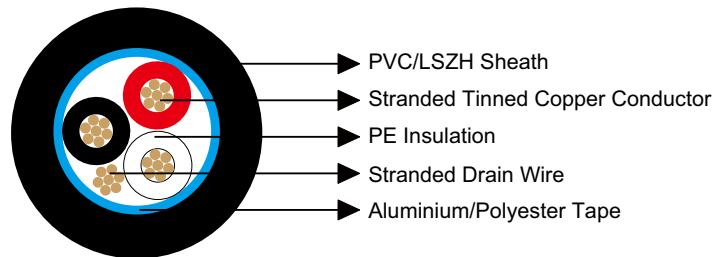

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2093
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	75
Nominal Capacitance Conductor to Screen	pF/m	135
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE118771V	3	0.41	0.84	5.1
BE118771H	3	0.41	0.84	5.1



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 8729

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper covered steel.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Red, Green, Clear.

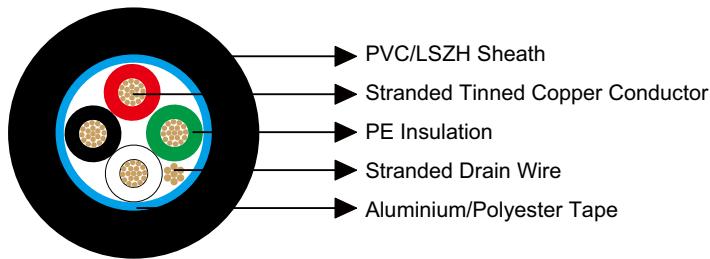

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		19x0.16
UL Style		2094
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	72
Nominal Capacitance Conductor to Screen	pF/m	138
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~75

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE118729V	4	0.41	1.30	6.5
BE118729H	4	0.41	1.30	6.5



Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 8772

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Red, Clear.

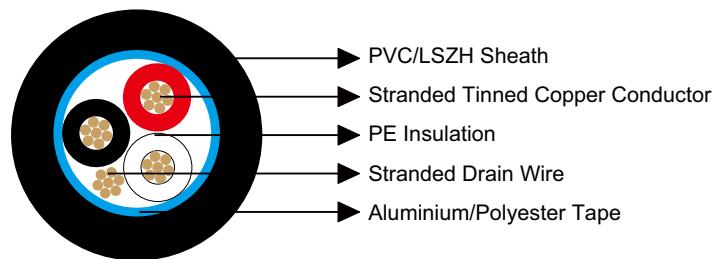

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2093
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	89
Nominal Capacitance Conductor to Screen	pF/m	167
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE118772V	3	0.41	0.84	5.5
BE118772H	3	0.41	0.84	5.5



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 8770

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Red, Clear.

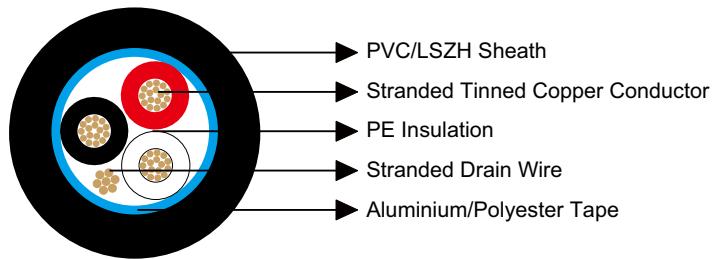

» Electrical & Mechanical Characteristics

AWG		18
Conductor Construction		16x0.25
UL Style		2093
Maximum Conductor Resistance	Ω/km	23
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	79
Nominal Capacitance Conductor to Screen	pF/m	157
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE118770V	3	0.46	0.84	6.3
BE118770H	3	0.46	0.84	6.3



Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 8618

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Red, Clear.

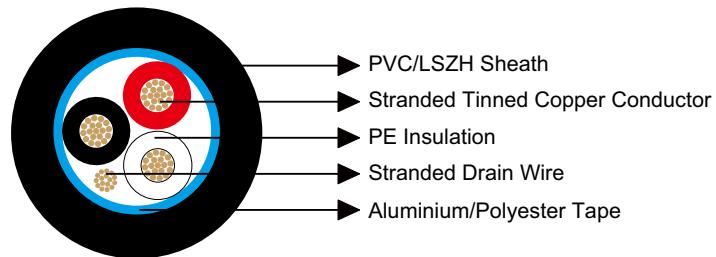

» Electrical & Mechanical Characteristics

AWG		16
Conductor Construction		19x0.287
UL Style		20253
Maximum Conductor Resistance	Ω/km	15.8
Voltage Rating	V	600
Nominal Capacitance Conductor to Conductor	pF/m	85
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE118618V	3	0.79	0.79	8.3
BE118618H	3	0.79	0.79	8.3



Caledonian Belden Equivalent Cables

Multicore Overall Screened Cables


Multicore Overall Screened Cables-Belden Equivalent 9770

» Application

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Red, White.

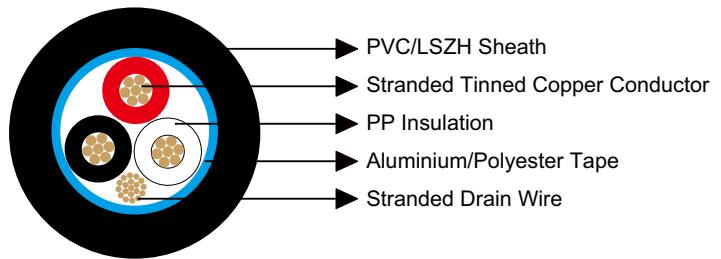

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	105
Nominal Capacitance Conductor to Screen	pF/m	197
Bending Radius		10xOverall Diameter
Operating Temperature	$^{\circ}\text{C}$	-20~90

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119770V	3	0.20	0.51	3.7
BE119770H	3	0.20	0.51	3.7



Multicore Overall Foil & Braid Screened Cables


Multicore Overall Foil & Braid Screened Cables-Belden Equivalent 9791

» Application

These multicore overall screened cables have individually insulated cores laid up in a Foil & Braid screen. These cables are suitable for RS-232 and RS-423 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Overall Screen1: Aluminium/Polyester tape.

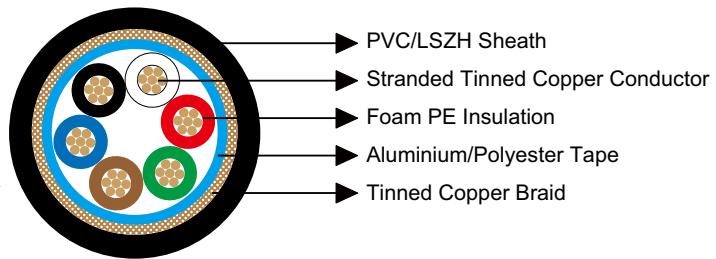

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White, Red, Green, Brown, Blue.

» Electrical & Mechanical Characteristics

AWG		28
Conductor Construction		7x0.127
UL Style		2919
Maximum Conductor Resistance	Ω/km	148.6
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	39
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119791V	6	0.4	0.6	5.7
BE119791H	6	0.4	0.6	5.7



Caledonian Belden Equivalent Cables

Multicore Unscreened Armoured Cables


Multicore Unscreened Armoured Cables-Belden Equivalent 28271

» Application

These multicore unscreened armoured cables are Type MC Metal Clad cables.

» Construction

- » Conductor: Bare copper wire.
- » Insulation: XLPE.
- » Inner Sheath: FR PVC.
- » Armour: Steel wire armour.
- » Outer Sheath: FR PVC.
- » Insulation Colour: Black, White, Red, Green, Brown. Other colours are available upon your request.

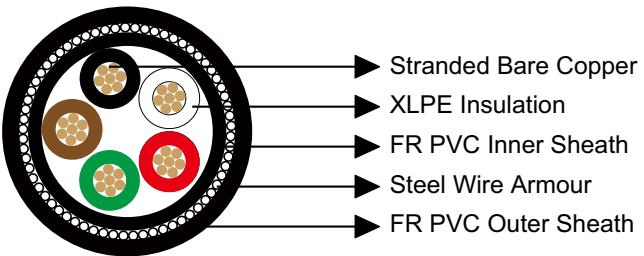

» Electrical & Mechanical Characteristics

AWG		12
Conductor Construction (No.x Dia. of Wires)		7x20
Nominal Conductor DC Resistance @20°C	Ω/km	5
Voltage Rating	V	600
Bending Radius		13xOverall Diameter
Operating Temperature	°C	-40~90

» Dimensions

Ordering Code	No. of Cores	Insulation Thickness	Outer Sheath Thickness	Overall Diameter
		mm	mm	mm
BE1128271V SWA	5	0.8	1.7	19.72



Multicore Unscreened Armoured Cables

Multicore Unscreened Armoured Cables-Belden Equivalent 28538

» Application

These multicore unscreened armoured cables are Type MC Metal Clad cables.

» Construction

- » Conductor: Bare copper wire.
- » Insulation: XLPE.
- » Inner Sheath: FR PVC.
- » Armour: Steel wire armour.
- » Outer Sheath: FR PVC.
- » Insulation Colour: Black, White, Red, Green, Brown, Blue, Orange, Yellow, Purple. Other colours are available upon your request.



- Stranded Bare Copper Conductor
- XLPE Insulation
- FR PVC Inner Sheath
- Steel Wire Armour
- FR PVC Outer Sheath

» Electrical & Mechanical Characteristics

AWG		12
Conductor Construction (No.x Dia. of Wires)		7x20
Nominal Conductor DC Resistance @20°C	Ω/km	5
Voltage Rating	V	600
Bending Radius		13xOverall Diameter
Operating Temperature	°C	-40~90

» Dimensions


Ordering Code	No. of Cores	Insulation Thickness	Outer Sheath Thickness	Overall Diameter
		mm	mm	mm
BE1128538V SWA	9	0.8	1.7	24.82



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables

Cat 6 Cable, SF/UTP-Belden Equivalent 7860ENS

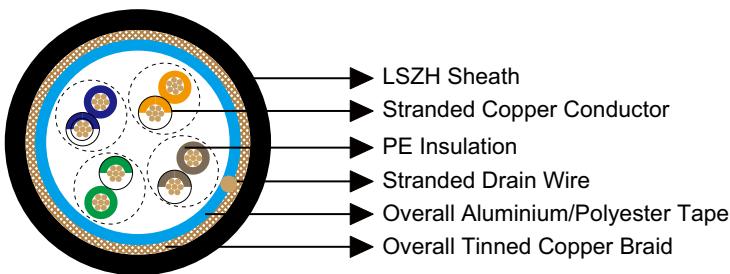

» Application

Horizontal and building backbone cable; Support current and future Category 6 and 5e applications, such as: 1000Base - T (Gigabit Ethernet), 100 Base - T, 10 Base - T, FDDI, ATM

» Construction

- » Conductor: Stranded copper.
- » Insulation: PE.
- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid.
- » Sheath: LSZH.
- » Insulation Colour: White/Blue & Blue, White/Green & Green, White/Orange & Orange, White/Brown & Brown.

» Electrical & Mechanical Characteristics

AWG		23
Impedance	Ohm	100±15
Voltage Rating	V	72
Maximum Capacitance Unbalance	pF/100m	330
Max. Conductor DCR	Ohm/km	75
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60


» Dimensions

Ordering Code	No. of Pairs	Overall Diameter mm
BE117860H	4	7.4



Multipair Overall Screened Cables

Single Pair Overall Screen-Belden Equivalent 5200FE

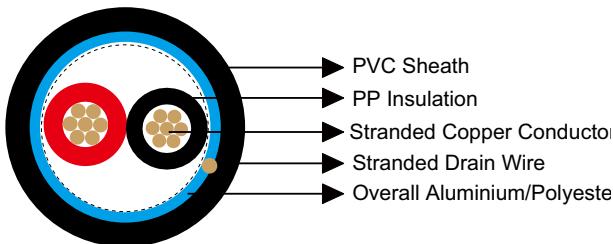

» Application

Intercom/PA Systems, Sound/Audio Systems

» Construction

- » Conductor: Stranded copper.
- » Insulation: PP.
- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Sheath: PVC.
- » Insulation Colour: Black & Red.

» Electrical & Mechanical Characteristics

AWG		16
UL Flammability		1666
Nominal Conductor DCR	Ohm/1000ft	14.4
Nominal Inductance	µH/ft	0.14
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/ft	58
Nominal Capacitance Conductor to Screen	pF/ft	114
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~75

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE115200H	1	0.20	0.43	4.78



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9501

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red.

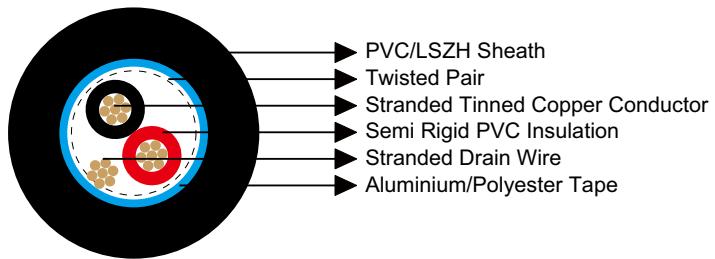

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	131
Nominal Capacitance Conductor to Screen	pF/m	243
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119501V	1	0.25	0.81	4.0
BE119501H	1	0.25	0.81	4.0



Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9502

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White.

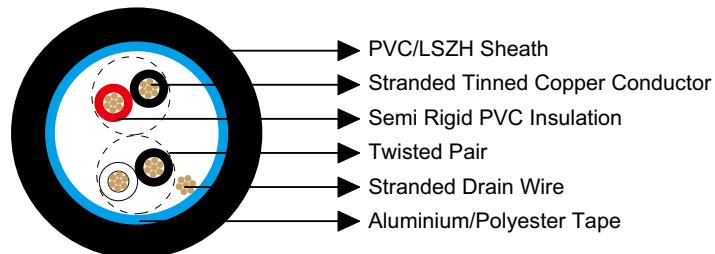

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119502V	2	0.25	0.81	5.6
BE119502H	2	0.25	0.81	5.6



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9503

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green.

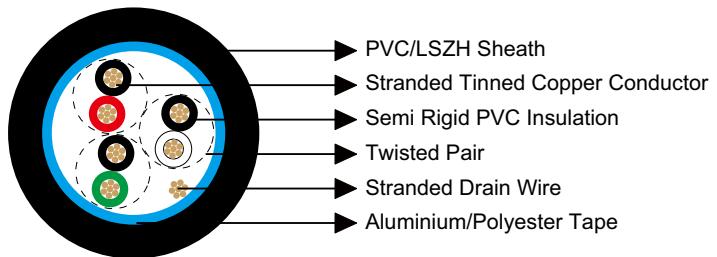

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119503V	3	0.25	0.81	5.9
BE119503H	3	0.25	0.81	5.9



Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9504

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue.

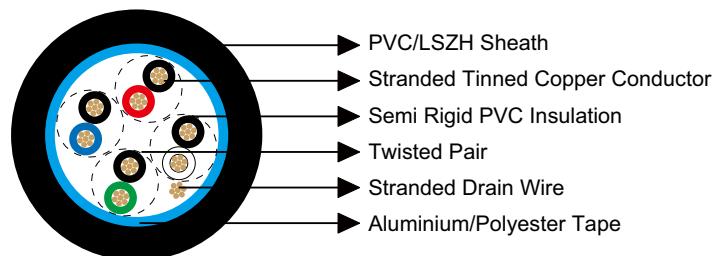

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119504V	4	0.25	0.81	6.7
BE119504H	4	0.25	0.81	6.7



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9505

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester tape.

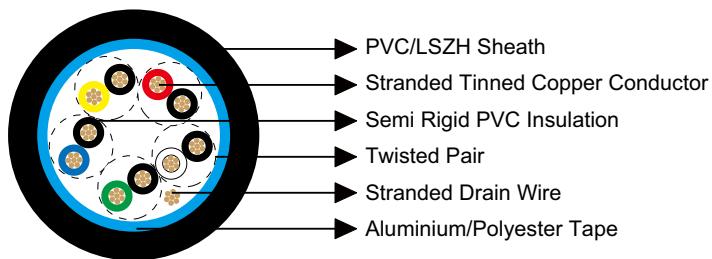

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119505V	5	0.25	0.89	7.3
BE119505H	5	0.25	0.89	7.3



Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9506

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown.

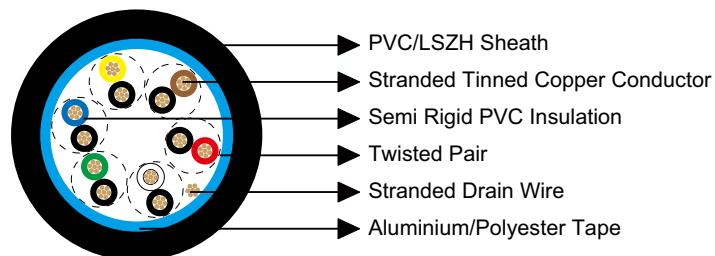

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119506V	6	0.25	0.89	7.3
BE119506H	6	0.25	0.89	7.3



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9507

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange.

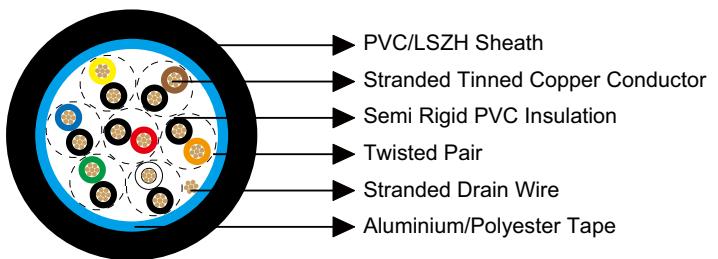

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119507V	7	0.25	0.89	7.5
BE119507H	7	0.25	0.89	7.5



Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9508

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White.

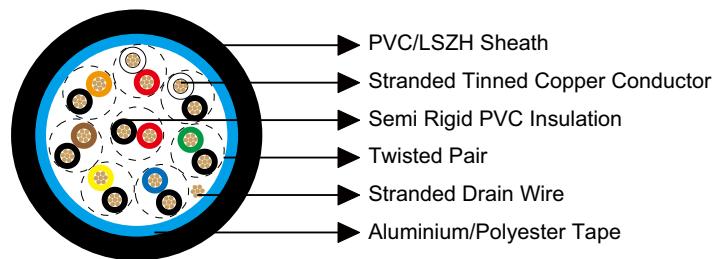

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119508V	8	0.25	0.89	8.2
BE119508H	8	0.25	0.89	8.2



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9509

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green.

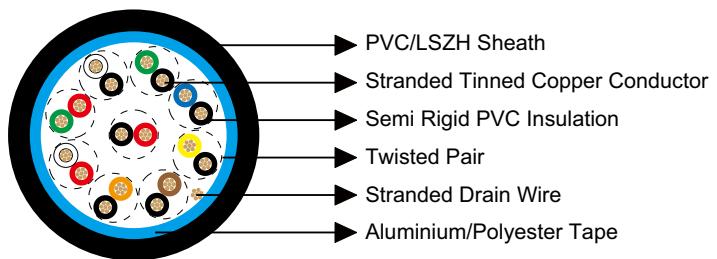

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119509V	9	0.25	0.89	8.5
BE119509H	9	0.25	0.89	8.5



Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9510

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue.

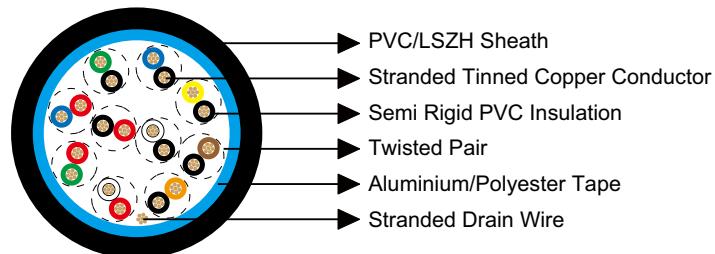

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119510V	10	0.25	1.02	9.4
BE119510H	10	0.25	1.02	9.4



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9515

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue.

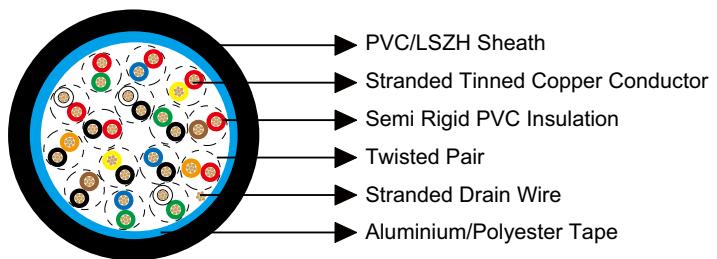

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119515V	15	0.25	1.02	10.6
BE119515H	15	0.25	1.02	10.6



Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9519

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue, Green/Yellow, Green/Brown, Green/Orange, White/Blue.

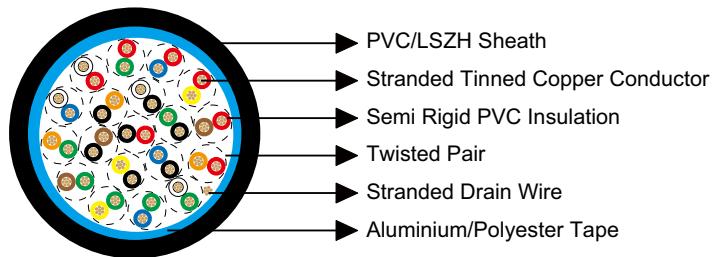

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119519V	19	0.25	1.02	11.4
BE119519H	19	0.25	1.02	11.4



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9525

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue, Green/Yellow, Green/Brown, Green/Orange, White/Blue, White/Yellow, White/Brown, White/Orange, Blue/Yellow, Blue/Brown, Blue/Orange.

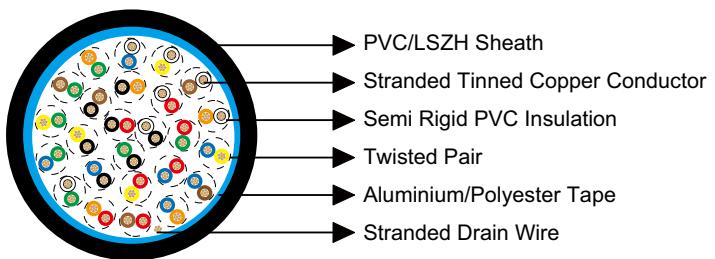

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119525V	25	0.25	1.14	12.8
BE119525H	25	0.25	1.14	12.8



Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 8441

» Application

These multipair overall screened cables have pairs laid up in a braid screen. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Separator: Polyester Tape.
- » Overall Screen: Tinned copper braid,
86% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red.

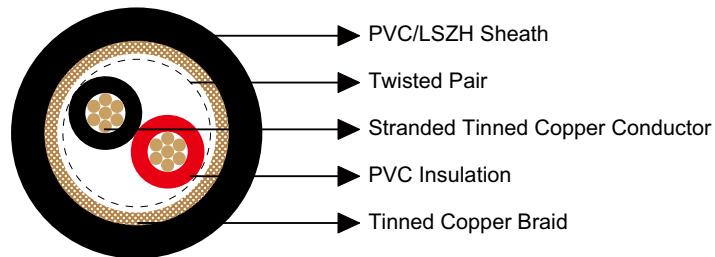

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2095
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	161
Nominal Capacitance Conductor to Screen	pF/m	282
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118441V	1	0.38	0.64	4.9
BE118441H	1	0.38	0.64	4.9



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9302

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.

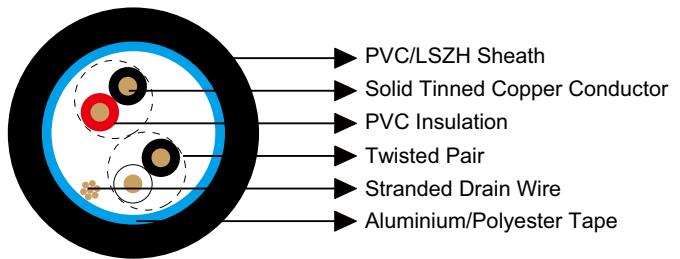

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119302V	2	0.33	0.81	6.2
BE119302H	2	0.33	0.81	6.2



Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9305

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.

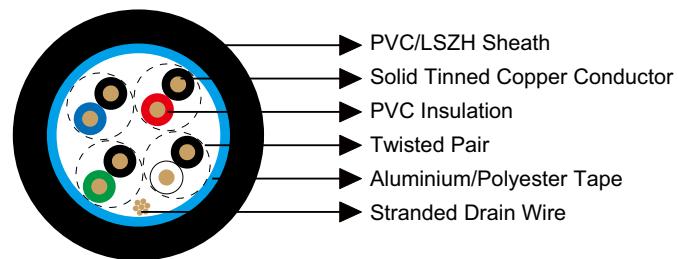

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119305V	4	0.33	0.81	6.73
BE119305H	4	0.33	0.81	6.73



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9306

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.

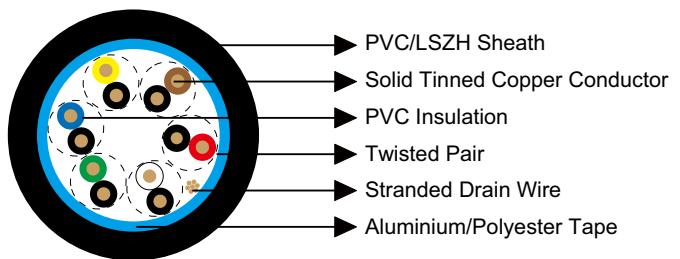

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119306V	6	0.33	0.81	8.0
BE119306H	6	0.33	0.81	8.0



Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9309

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green.

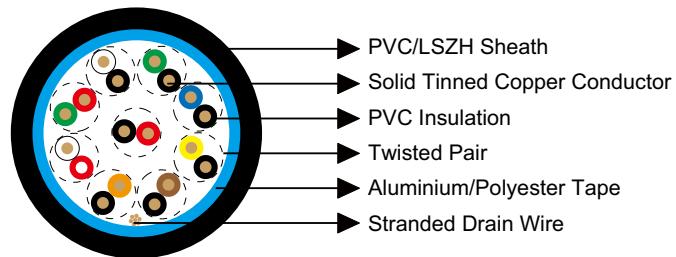

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119309V	9	0.33	0.84	9.22
BE119309H	9	0.33	0.84	9.22



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9315

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue.

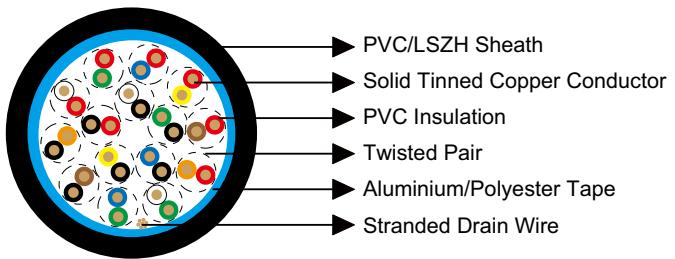

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119315V	15	0.33	0.94	11.4
BE119315H	15	0.33	0.94	11.4



Multipair Overall Screened Cables

Multipair Overall Screened Cables-Belden Equivalent 9319

» Application


These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue, Green/Yellow, Green/Brown, Green/Orange, White/Blue.

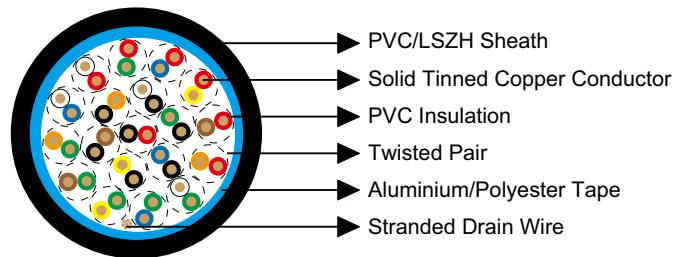

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119319V	19	0.33	1.02	12.6
BE119319H	19	0.33	1.02	12.6



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9327

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.

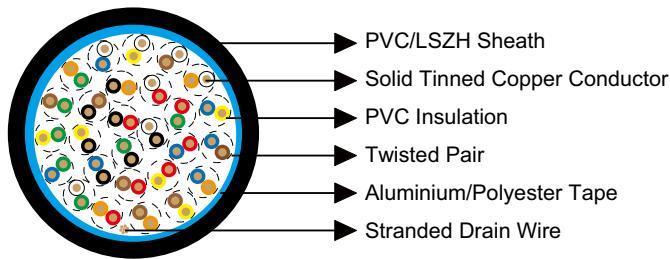

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red, Black/White, Black/Green, Black/Blue, Black/Yellow, Black/Brown, Black/Orange, Red/White, Red/Green, Red/Blue, Red/Yellow, Red/Brown, Red/Orange, Green/White, Green/Blue, Green/Yellow, Green/Brown, Green/Orange, White/Blue, White/Yellow, White/Brown, White/Orange, Blue/Yellow, Blue/Brown, Blue/Orange, Brown/Yellow, Brown/Orange.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119327V	27	0.33	1.14	15.6
BE119327H	27	0.33	1.14	15.6



Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9154

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black/Red.

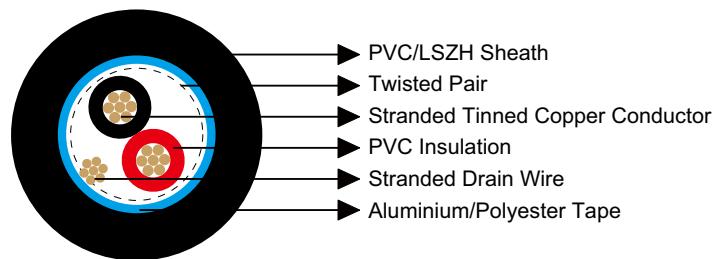

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2464
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	197
Nominal Capacitance Conductor to Screen	pF/m	328
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119154V	1	0.36	0.79	5.0
BE119154H	1	0.36	0.79	5.0



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9680

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are used as low capacitance computer cables for EIA RS-232/422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.

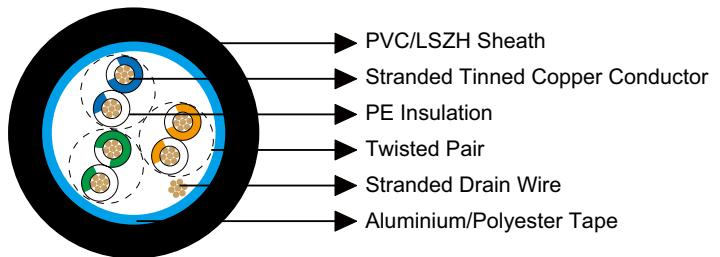

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119680V	3	0.25	0.89	6.4
BE119680H	3	0.25	0.89	6.4



Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9681

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are used as low capacitance computer cables for EIA RS-232/422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.

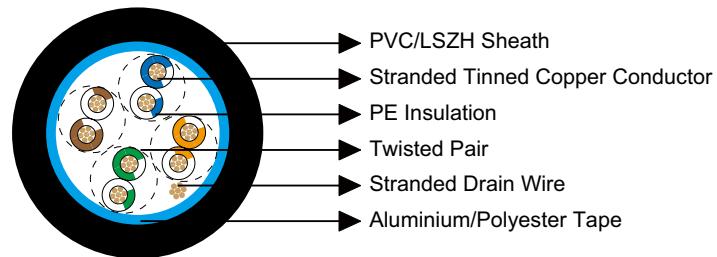

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119681V	4	0.25	0.89	7.1
BE119681H	4	0.25	0.89	7.1



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9682

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are used as low capacitance computer cables for EIA RS-232/422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.

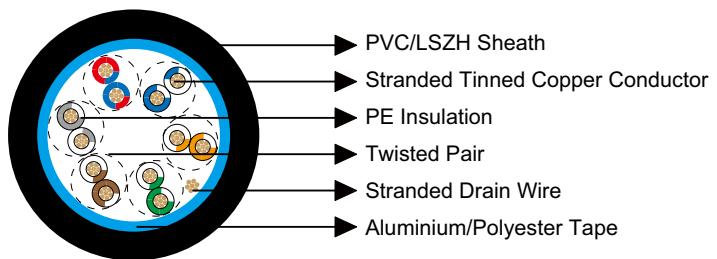

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119682V	6	0.25	0.89	8.2
BE119682H	6	0.25	0.89	8.2



Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9683

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are used as low capacitance computer cables for EIA RS-232/422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.

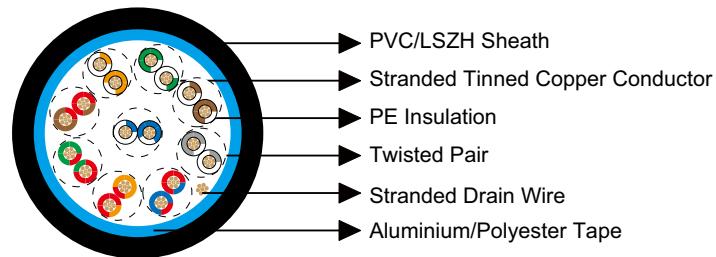

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/Green & Green/Red, Red/Brown & Brown/Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119683V	9	0.25	0.89	9.5
BE119683H	9	0.25	0.89	9.5



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 9684

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are used as low capacitance computer cables for EIA RS-232/422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.

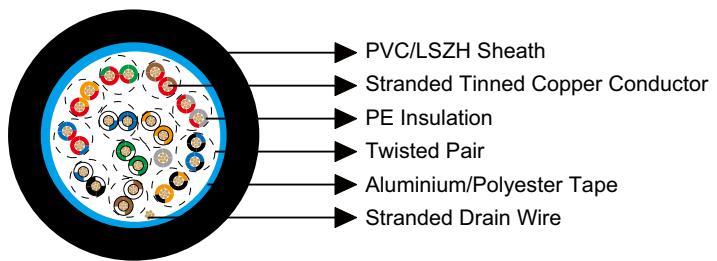

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black, Gray (single conductor).

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119684V	12	0.25	0.89	10.6
BE119684H	12	0.25	0.89	10.6



Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 8641

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a stranded tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Clear.

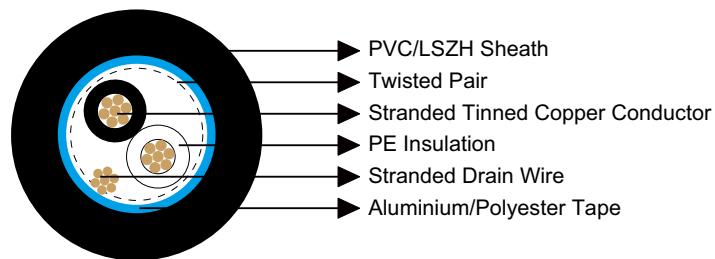

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2092
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	72
Nominal Capacitance Conductor to Screen	pF/m	138
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118641V	1	0.41	0.64	4.3
BE118641H	1	0.41	0.64	4.3



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 8761

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Clear.

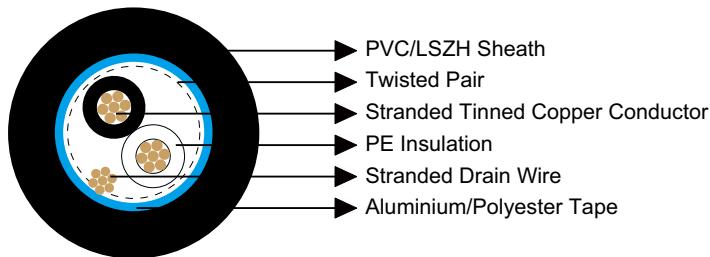

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2092
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	79
Nominal Capacitance Conductor to Screen	pF/m	154
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118761V	1	0.41	0.64	4.4
BE118761H	1	0.41	0.64	4.4



Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 8762

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Clear.

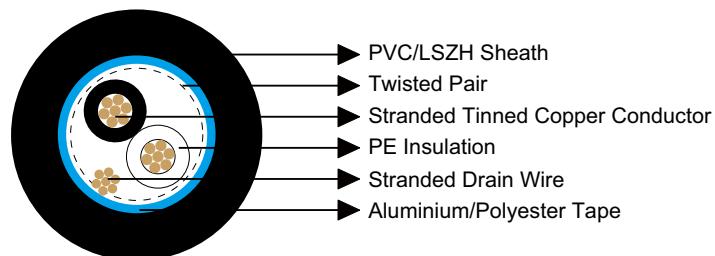

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2092
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	89
Nominal Capacitance Conductor to Screen	pF/m	161
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118762V	1	0.41	0.71	5.2
BE118762H	1	0.41	0.71	5.2



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 8760

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Clear.

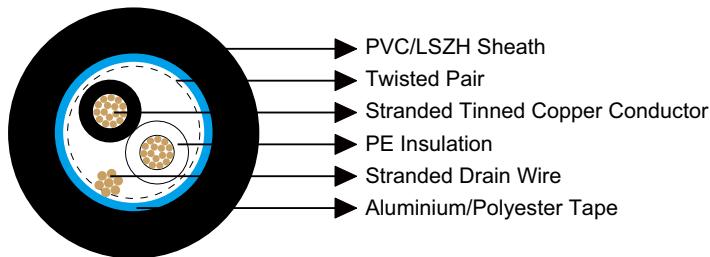

» Electrical & Mechanical Characteristics

AWG		18
Conductor Construction		16x0.25
UL Style		2092
Maximum Conductor Resistance	Ω/km	21
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	89.24
Nominal Inductance	μH/m	0.59
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118760V	1	0.46	0.71	5.6
BE118760H	1	0.46	0.71	5.6



Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 8719

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Clear.

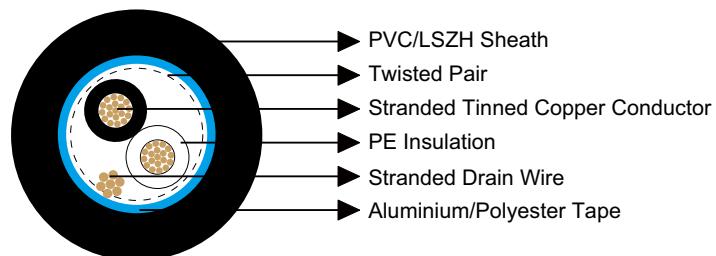

» Electrical & Mechanical Characteristics

AWG		16
Conductor Construction		19x0.287
UL Style		20253
Maximum Conductor Resistance	Ω/km	15.8
Voltage Rating	V	600
Nominal Capacitance Conductor to Conductor	pF/m	76
Nominal Capacitance Conductor to Screen	pF/m	144
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118719V	1	0.81	0.81	8.0
BE118719H	1	0.81	0.81	8.0



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 8720

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Clear.

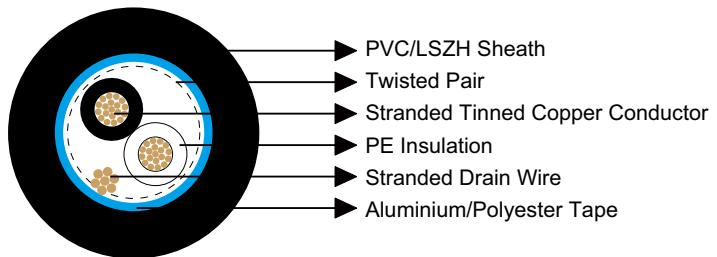

» Electrical & Mechanical Characteristics

AWG		14
Conductor Construction		19x0.36
UL Style		20253
Maximum Conductor Resistance	Ω/km	10
Voltage Rating	V	600
Nominal Capacitance Conductor to Conductor	pF/m	79
Nominal Capacitance Conductor to Screen	pF/m	154
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118720V	1	0.81	0.89	9.0
BE118720H	1	0.81	0.89	9.0



Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 8718

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Clear.

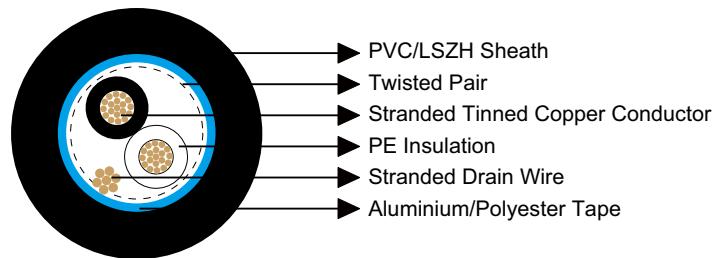

» Electrical & Mechanical Characteristics

AWG		12
Conductor Construction		19x0.46
UL Style		20253
Maximum Conductor Resistance	Ω/km	8
Voltage Rating	V	600
Nominal Capacitance Conductor to Conductor	pF/m	82
Nominal Capacitance Conductor to Screen	pF/m	161
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118718V	1	0.94	0.86	10.2
BE118718H	1	0.94	0.86	10.2



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Overall Screened Cables-Belden Equivalent 8451

» Application

These multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black, Red.

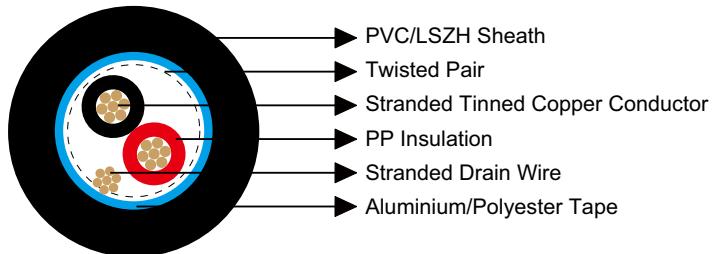

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	112
Nominal Capacitance Conductor to Screen	pF/m	220
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~75

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118451V	1	0.2	0.5	3.5
BE118451H	1	0.2	0.5	3.5



Multipair Overall Screened Armoured Cables


Multipair Overall Screened Armoured Cables-Belden Equivalent 26500

» Application

These multipair overall screened armoured cables provide excellent protections. They are ACIC armoured cables, used as instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: XLPE.
- » Overall Screen: Aluminium/Polyester tape.



- » FR PVC Inner Sheath
- » Twisted Pair
- » Stranded Tinned Copper Conductor
- » XLPE Insulation
- » Tinned Copper Drain Wire
- » Aluminium/Polyester Tape
- » Steel Wire Armour
- » FR PVC Outer Sheath

- » Drain Wire: 18 AWG (7X26) tinned copper wire.
- » Inner Sheath: FR PVC.
- » Armour: Steel wire armour.
- » Outer Sheath: FR PVC.
- » Insulation Colour: Black, Red. Other colours are available upon your request.

» Electrical & Mechanical Characteristics

AWG		16
Conductor Construction (No.x Dia. of Wires)		7x24
Nom. Conductor DC Resistance @ 20°C	Ω/km	14
Nominal Outer Shield DC Resistance @ 20°C	Ω/km	13
Voltage Rating	V	300
Bending Radius		11xOverall Diameter
Operating Temperature	°C	-40~90

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Outer Sheath Thickness	Overall Diameter
		mm	mm	mm
BE1126500V SWA	1	0.7	1.5	13.24±1



Caledonian Belden Equivalent Cables

Multipair Overall Screened Armoured Cables


Multipair Overall Screened Armoured Cables-Belden Equivalent 26503

» Application

These multipair overall screened armoured cables provide excellent protections. They are ACIC armoured cables, used as instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: XLPE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: 18 AWG (7X26) tinned copper wire.

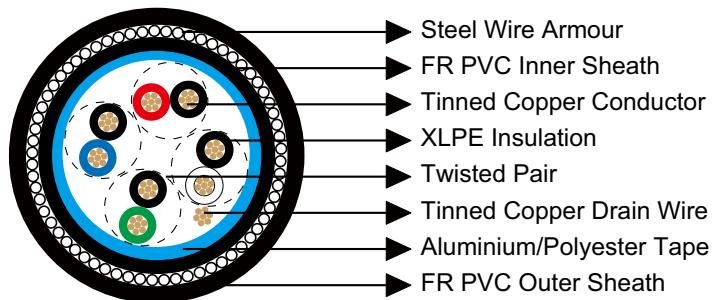

- » Inner Sheath: FR PVC.
- » Armour: Steel wire armour.
- » Outer Sheath: FR PVC.
- » Insulation Colour: Black/Red and Numbered 1, Black/White and Number 2, Black/Green and Number 3, Black/Blue and Number 4. Other colours are available upon your request.

» Electrical & Mechanical Characteristics

AWG		16
Conductor Construction (No.x Dia. of Wires)		7x24
Nom. Conductor DC Resistance @ 20°C	Ω/km	14
Nominal Outer Shield DC Resistance @ 20°C	Ω/km	13
Voltage Rating	V	300
Bending Radius		11xOverall Diameter
Operating Temperature	°C	-40~90

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Outer Sheath Thickness	Overall Diameter
		mm	mm	mm
BE1126503V SWA	4	0.7	1.7	21.8



Multipair Overall Screened Armoured Cables


Multipair Overall Screened Armoured Cables-Belden Equivalent 26514

» Application

These multipair overall screened armoured cables provide excellent protections. They are ACIC armoured cables, used as instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: XLPE.
- » Overall Screen: Aluminium/Polyester tape.
- » Drain Wire: 20 AWG (7X28) tinned copper wire.
- » Inner Sheath: FR PVC.
- » Armour: Steel wire armour.
- » Outer Sheath: FR PVC.
- » Insulation Colour: Black, Red. Other colours are available upon your request.



- FR PVC Inner Sheath
- Twisted Pair
- Stranded Tinned Copper Conductor
- XLPE Insulation
- Tinned Copper Drain Wire
- Aluminium/Polyester Tape
- Steel Wire Armour
- FR PVC Outer Sheath

» Electrical & Mechanical Characteristics

AWG		18
Conductor Construction (No.x Dia. of Wires)		7x26
Nom. Conductor DC Resistance @ 20°C	Ω/km	22
Nominal Outer Shield DC Resistance @ 20°C	Ω/km	33
Voltage Rating	V	300
Bending Radius		12xOverall Diameter
Operating Temperature	°C	-40~90

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Outer Sheath Thickness	Overall Diameter
		mm	mm	mm
BE1126514V SWA	1	0.7	1.5	12.64±1



Caledonian Belden Equivalent Cables

Multipair Overall Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 8723

» Application

These cables have individually screened pairs laid up with a tinned copper drain wire. These cables are suitable for used as audio, control and computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Red & Black, Green & White.

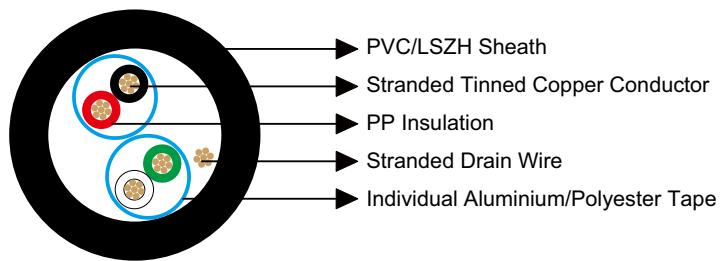

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	108
Nominal Capacitance Conductor to Screen	pF/m	203
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118723V	2	0.2	0.5	4.3
BE118723H	2	0.2	0.5	4.3



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 8777

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are suitable for used as audio, control and computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

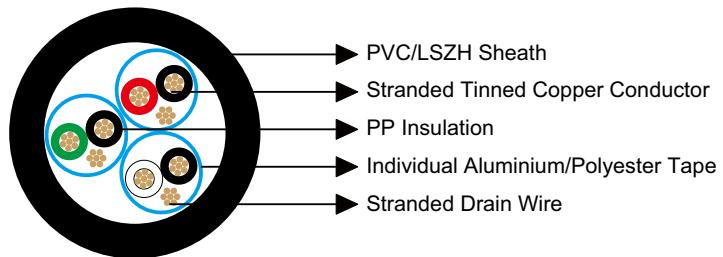

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Red & Black, Black & White, Black & Green.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118777V	3	0.25	0.86	6.9
BE118777H	3	0.25	0.86	6.9



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 8764

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG solid tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Individual Screen: Aluminium/Polyester tape.

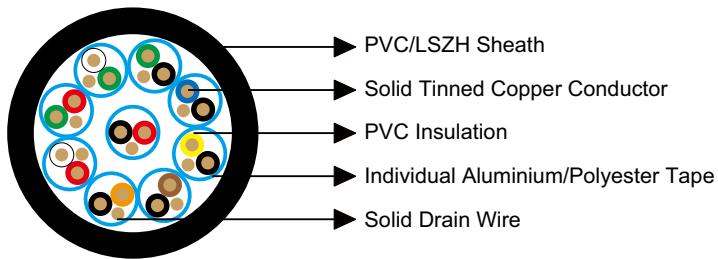

Polyester tape.

- » Drain Wire: Solid tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	131
Nominal Capacitance Conductor to Screen	pF/m	253
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118764V	9	0.33	1.02	10.8
BE118764H	9	0.33	1.02	10.8



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 8765

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG solid tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Individual Screen: Aluminium/Polyester tape.

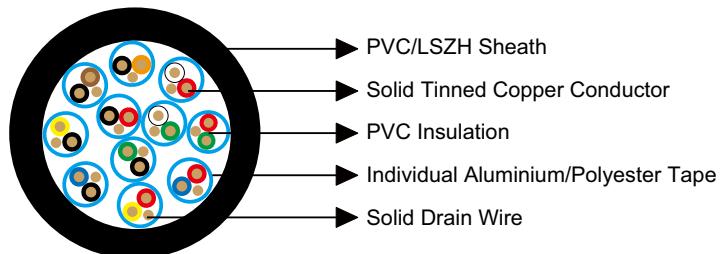

Polyester tape.

- » Drain Wire: Solid tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Red & Black, Green & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	131
Nominal Capacitance Conductor to Screen	pF/m	253
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118765V	11	0.33	1.02	11.9
BE118765H	11	0.33	1.02	11.9



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 8766

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG solid tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC.
- » Individual Screen: Aluminium/Polyester tape.

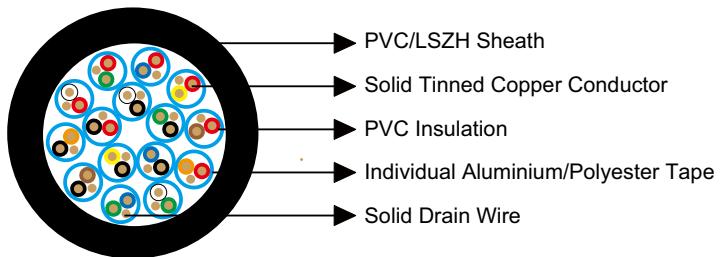

Polyester tape.

- » Drain Wire: Solid tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	131
Nominal Capacitance Conductor to Screen	pF/m	253
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118766V	15	0.33	1.14	13.3
BE118766H	15	0.33	1.14	13.3



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 8778

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

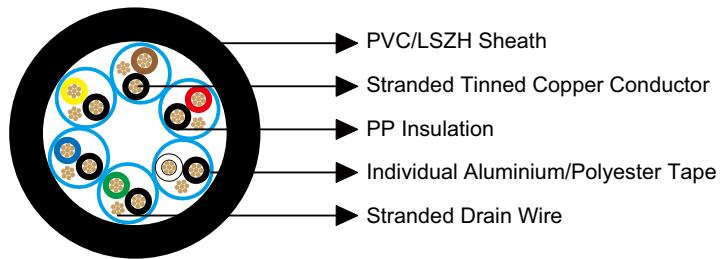

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118778V	6	0.25	1.22	9.6
BE118778H	6	0.25	1.22	9.6



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 8774

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

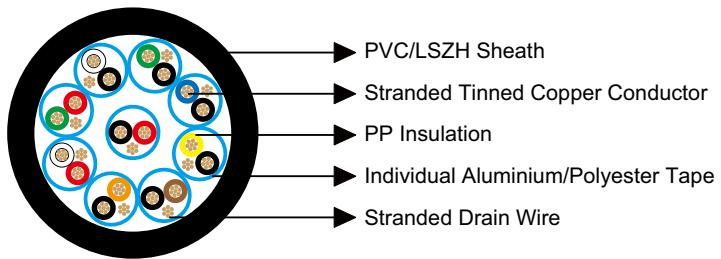

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118774V	9	0.25	1.22	11.1
BE118774H	9	0.25	1.22	11.1



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 8775

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

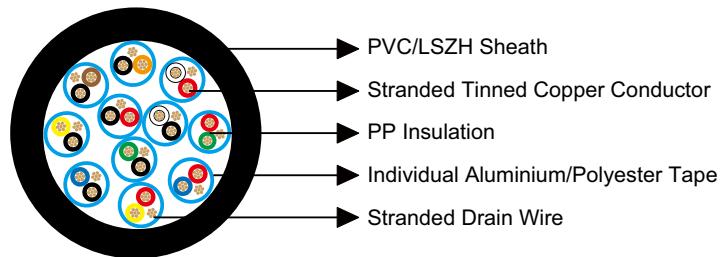

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118775V	11	0.25	1.22	12.3
BE118775H	11	0.25	1.22	12.3



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 8776

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

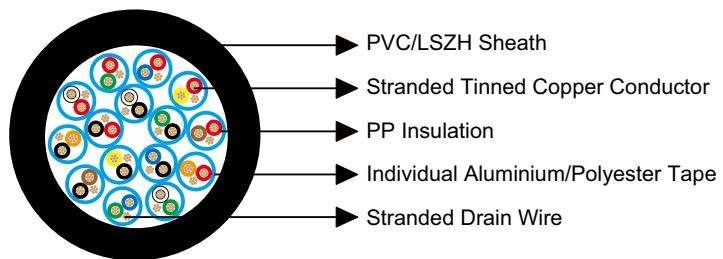

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118776V	15	0.25	1.6	14.4
BE118776H	15	0.25	1.6	14.4



Multipair Individually Screened Cables

Multipair Individually Screened Cables-Belden Equivalent 8773


» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown, Green & Orange, White & Blue, White & Yellow, White & Brown, White & Orange, Blue & Yellow, Blue & Brown, Blue & Orange, Brown & Yellow, Brown & Orange.

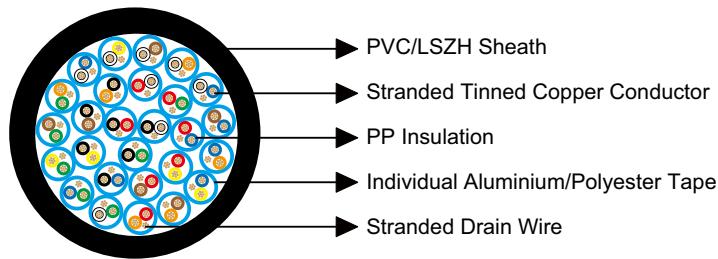

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118773V	27	0.25	1.52	17.9
BE118773H	27	0.25	1.52	17.9



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9873

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green.

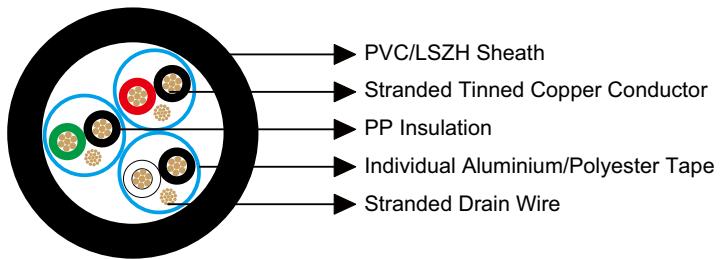

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2919
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119873V	3	0.33	0.81	8.6
BE119873H	3	0.33	0.81	8.6



Multipair Individually Screened Cables

Multipair Individually Screened Cables-Belden Equivalent 9874


» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown.

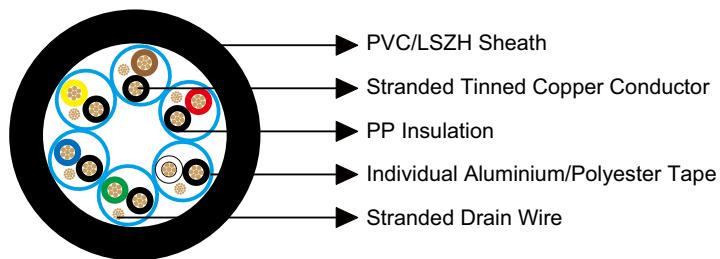

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2919
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119874V	6	0.33	0.81	11.3
BE119874H	6	0.33	0.81	11.3



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables

Multipair Individually Screened Cables-Belden Equivalent 9875


» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green.

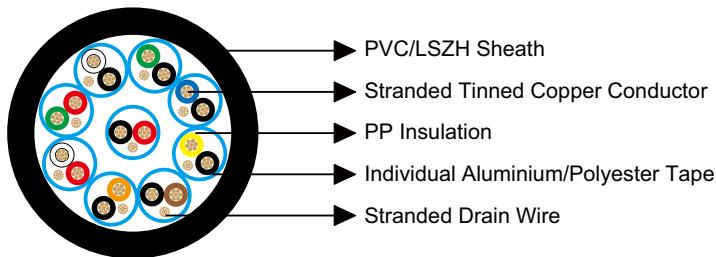

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2919
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119875V	9	0.33	1.22	14.1
BE119875H	9	0.33	1.22	14.1



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9876

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

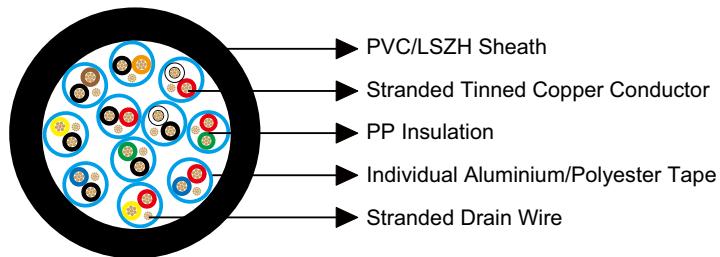

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow.

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2919
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119876V	11	0.33	1.22	15.2
BE119876H	11	0.33	1.22	15.2



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables

Multipair Individually Screened Cables-Belden Equivalent 9877

» Application


These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).

» Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown.

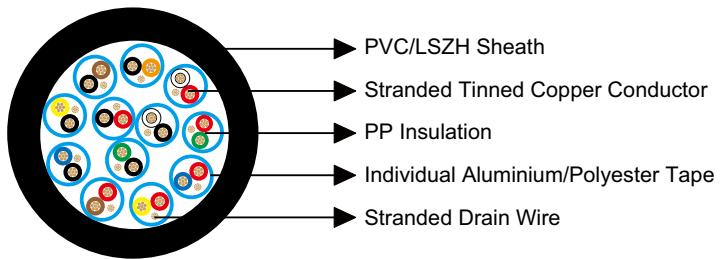

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2919
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119877V	12	0.33	1.22	15.8
BE119877H	12	0.33	1.22	15.8



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9879

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 22AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

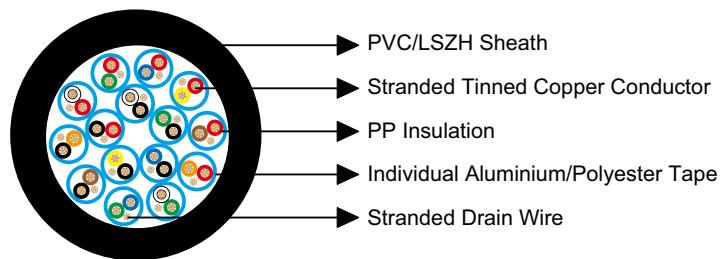

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue.

» Electrical & Mechanical Characteristics

AWG		20
Conductor Construction		7x0.32
UL Style		2919
Maximum Conductor Resistance	Ω/km	34.1
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119879V	15	0.33	1.22	17.6
BE119879H	15	0.33	1.22	17.6



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9773

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 20AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green.

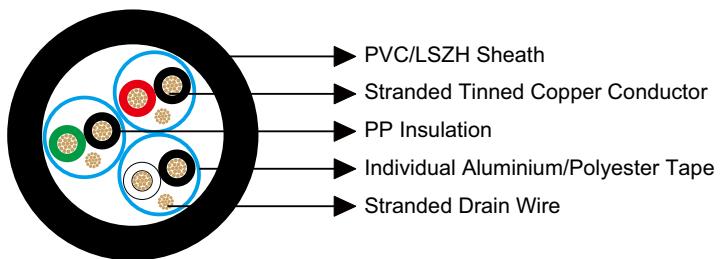

» Electrical & Mechanical Characteristics

AWG		18
Conductor Construction		19x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	21
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119773V	3	0.4	0.81	10.0
BE119773H	3	0.4	0.81	10.0



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9774

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 20AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

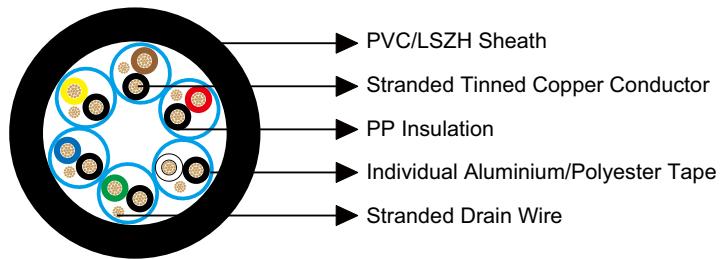

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown.

» Electrical & Mechanical Characteristics

AWG		18
Conductor Construction		19x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	21
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119774V	6	0.4	1.22	14.1
BE119774H	6	0.4	1.22	14.1



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9775

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 20AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

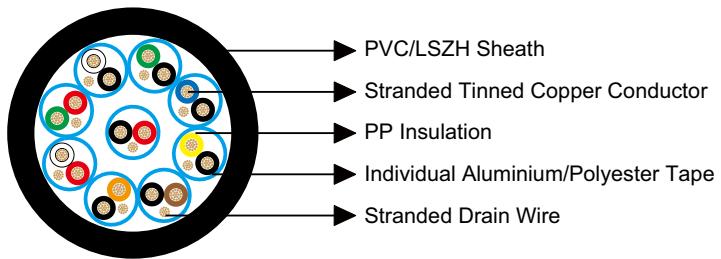

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green.

» Electrical & Mechanical Characteristics

AWG		18
Conductor Construction		19x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	21
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119775V	9	0.4	1.22	16.5
BE119775H	9	0.4	1.22	16.5



Multipair Individually Screened Cables

Multipair Individually Screened Cables-Belden Equivalent 9776


» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 20AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown.

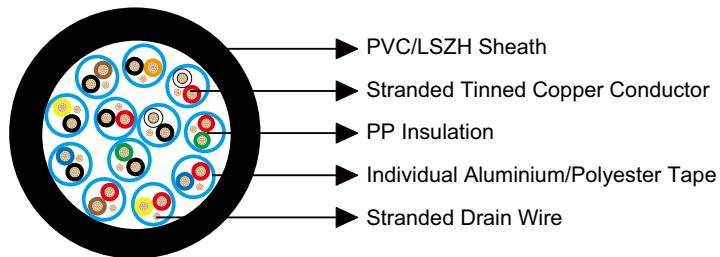

» Electrical & Mechanical Characteristics

AWG		18
Conductor Construction		19x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	21
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119776V	12	0.4	1.22	18.6
BE119776H	12	0.4	1.22	18.6



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9777

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 20AWG stranded tinned copper drain wire. These cables are used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PP.
- » Individual Screen: Aluminium/Polyester tape.

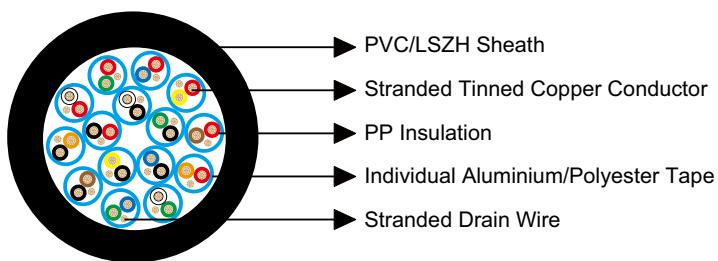

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue.

» Electrical & Mechanical Characteristics

AWG		18
Conductor Construction		19x0.254
UL Style		2919
Maximum Conductor Resistance	Ω/km	21
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	180
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119777V	15	0.4	1.22	20.8
BE119777H	15	0.4	1.22	20.8



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9729

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

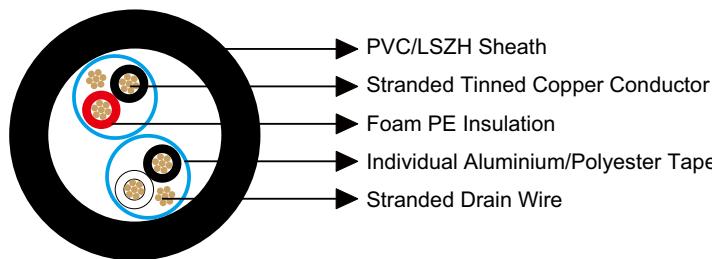

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119729V	2	0.47	1.19	8.1
BE119729H	2	0.47	1.19	8.1



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9730

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

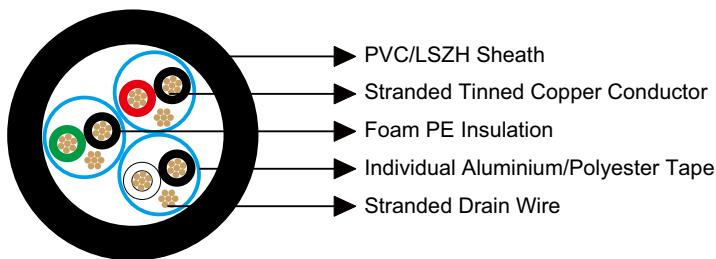

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119730V	3	0.47	1.22	8.5
BE119730H	3	0.47	1.22	8.5



Multipair Individually Screened Cables

Multipair Individually Screened Cables-Belden Equivalent 9728

» Application


These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue.

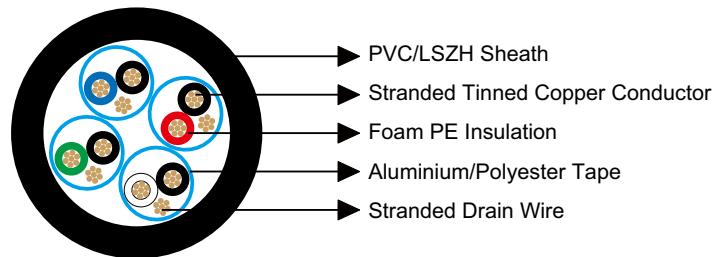

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119728V	4	0.47	1.22	9.2
BE119728H	4	0.47	1.22	9.2



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9731

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

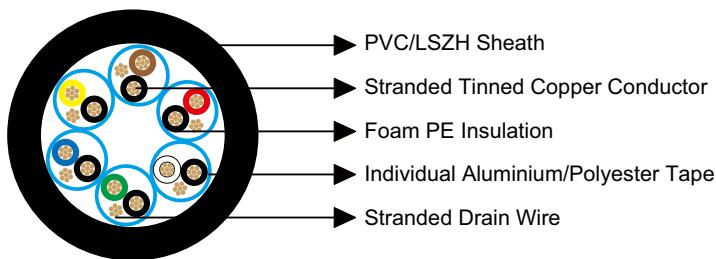

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119731V	6	0.47	1.22	10.7
BE119731H	6	0.47	1.22	10.7



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9732

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

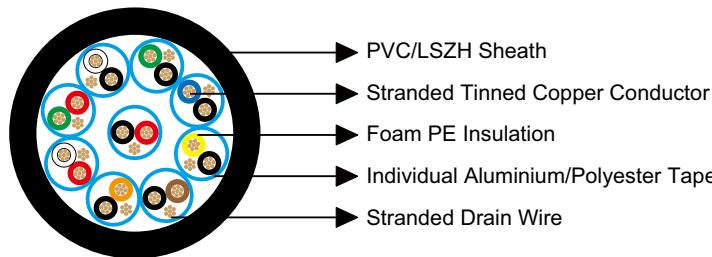

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119732V	9	0.47	1.22	12.4
BE119732H	9	0.47	1.22	12.4



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9733

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

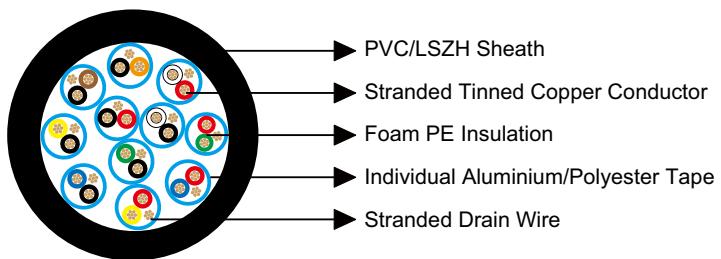

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119733V	11	0.47	1.22	14.6
BE119733H	11	0.47	1.22	14.6



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9734

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

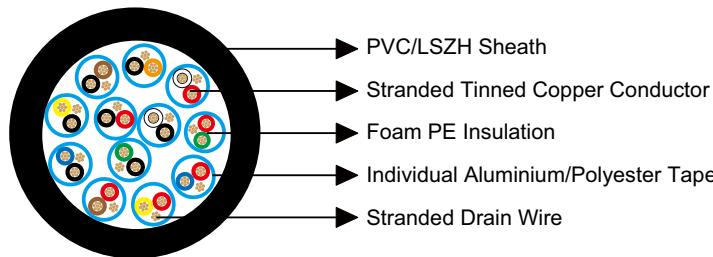

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119734V	12	0.47	1.22	14.6
BE119734H	12	0.47	1.22	14.6



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9735

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

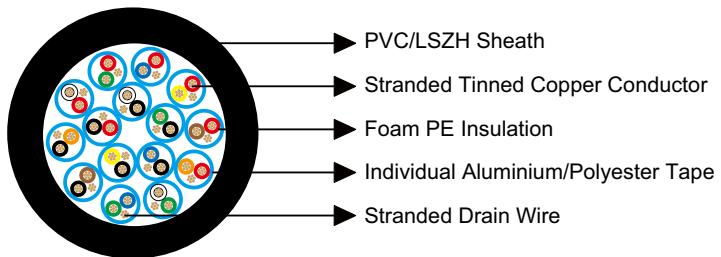

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119735V	15	0.47	1.22	16.2
BE119735H	15	0.47	1.22	16.2



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9736

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

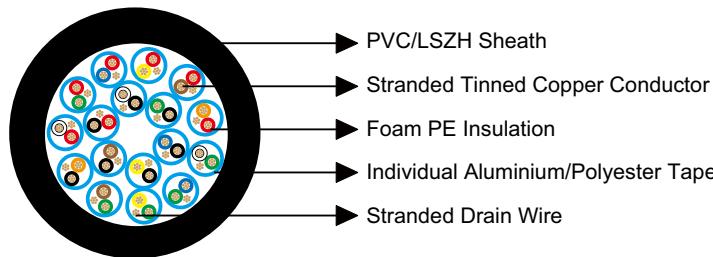

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119736V	17	0.47	1.22	17.0
BE119736H	17	0.47	1.22	17.0



Caledonian Belden Equivalent Cables

Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9737

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

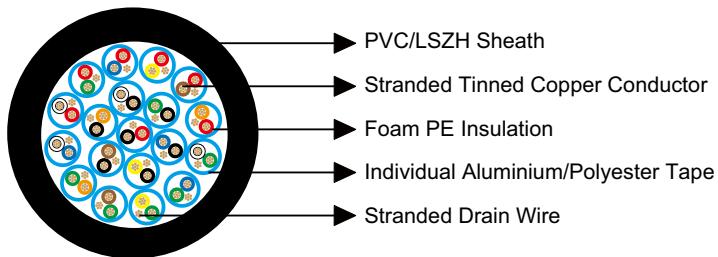

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown, Green & Orange, White & Blue.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119737V	19	0.47	1.22	17.0
BE119737H	19	0.47	1.22	17.0



Multipair Individually Screened Cables


Multipair Individually Screened Cables-Belden Equivalent 9738

» Application

These cables have individually screened pairs laid up. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

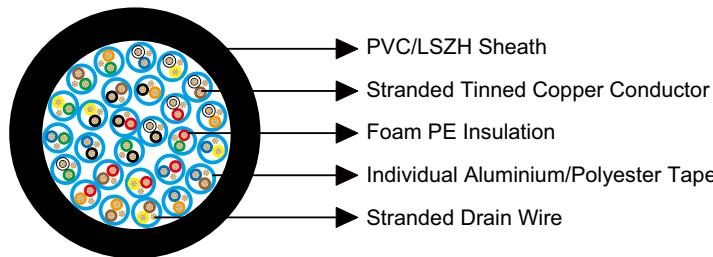

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown, Green & Orange, White & Blue, White & Yellow, White & Brown, White & Orange, Blue & Yellow, Blue & Brown, Blue & Orange, Brown & Yellow, Brown & Orange.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE119738V	27	0.47	1.22	20.2
BE119738H	27	0.47	1.22	20.2



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8332

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White.

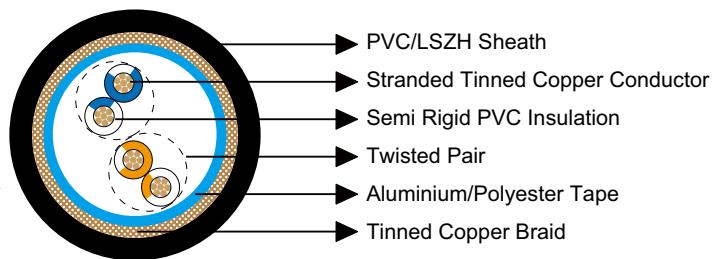

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE118332V	2	0.25	0.81	6.4
BE118332H	2	0.25	0.81	6.4



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8333

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

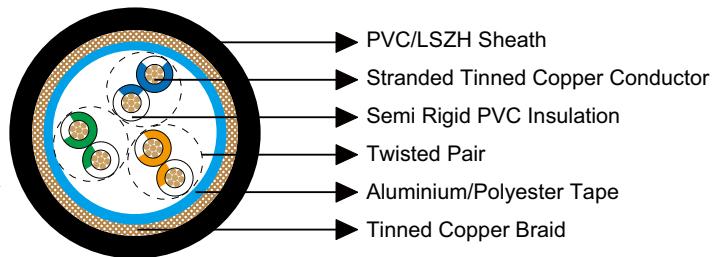

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE118333V	3	0.25	0.81	6.7
BE118333H	3	0.25	0.81	6.7



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8334

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

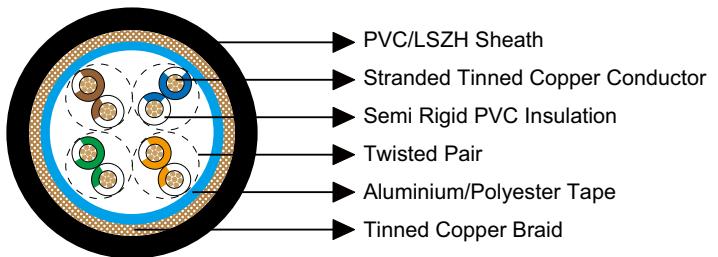

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE118334V	4	0.25	0.81	6.9
BE118334H	4	0.25	0.81	6.9



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8335

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

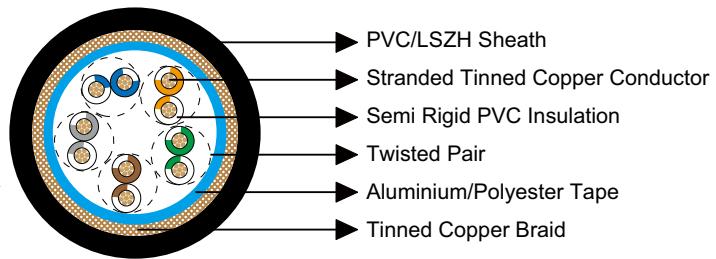

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE118335V	5	0.25	0.81	7.5
BE118335H	5	0.25	0.81	7.5



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8336

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

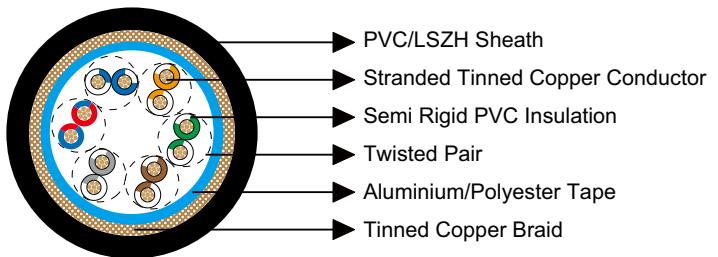

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE118336V	6	0.25	0.81	7.9
BE118336H	6	0.25	0.81	7.9



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8337

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

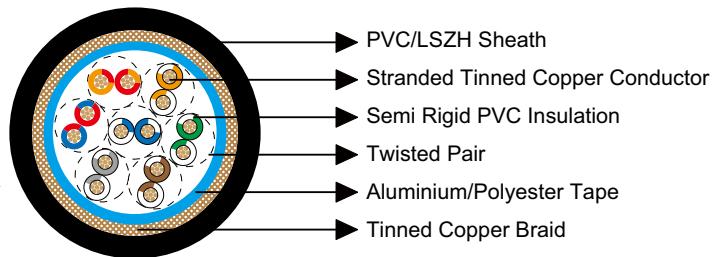

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118337V	7	0.25	0.81	8.2
BE118337H	7	0.25	0.81	8.2



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8340

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

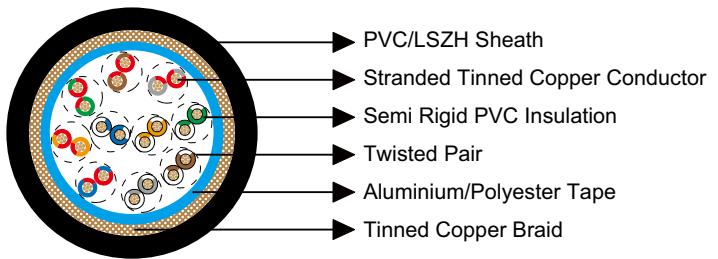

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE118340V	10	0.25	0.81	9.8
BE118340H	10	0.25	0.81	9.8



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8342

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

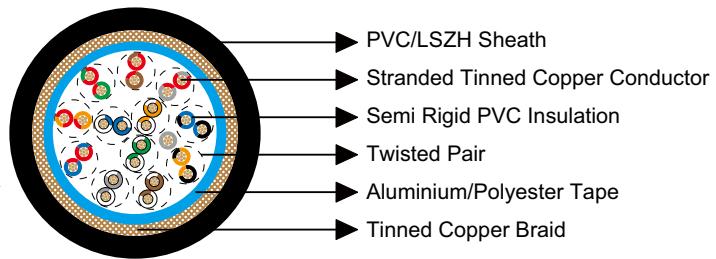

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black, Gray (single conductor).

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118342V	12	0.25	0.81	10.3
BE118342H	12	0.25	0.81	10.3



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8345

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

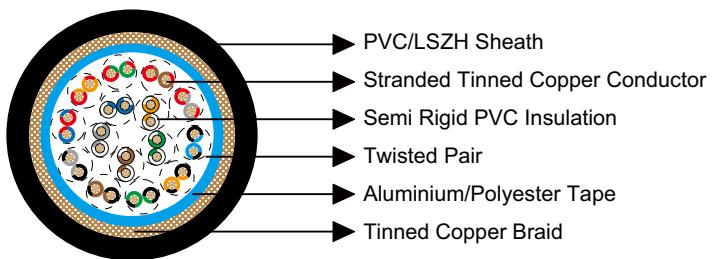

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black, Black/Green & Green/Black, Black/Brown & Brown/Black, Black/Gray & Gray/Black.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118345V	15	0.25	0.81	11.3
BE118345H	15	0.25	0.81	11.3



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8355

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black, Black/Green & Green/Black, Black/Brown & Brown/Black, Black/Gray & Gray/Black, Yellow/Blue & Blue/Yellow, Yellow/Orange & Orange/Yellow, Yellow/Green & Green/Yellow, Yellow/Brown & Brown/Yellow, Yellow/Gray & Gray/Yellow, Purple/Blue & Blue/Purple, Purple/Orange & Orange/Purple, Purple/Green & Green/Purple, Purple/Brown & Brown/Purple, Purple/Gray & Gray/Purple.

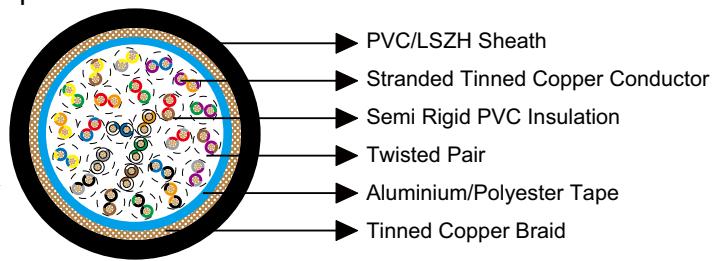

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2464
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	98
Nominal Capacitance Conductor to Screen	pF/m	164
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118355V	25	0.25	0.81	14.0
BE118355H	25	0.25	0.81	14.0



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8302

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

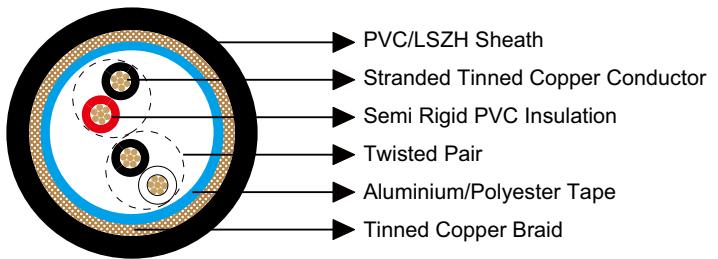

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	131
Nominal Capacitance Conductor to Screen	pF/m	236
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118302V	2	0.25	0.81	7.1
BE118302H	2	0.25	0.81	7.1



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8303

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

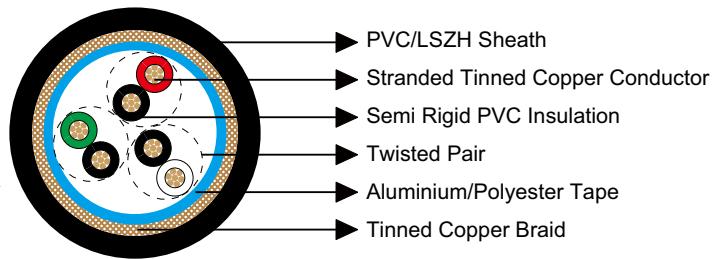

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	207
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118303V	3	0.25	0.81	7.5
BE118303H	3	0.25	0.81	7.5



Caledonian Belden Equivalent Cables


Multipair Overall Foil & Braid Screened Cables

Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8304

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
 - » Insulation: Semi-Rigid PVC.
 - » Overall Screen1: Aluminium/Polyester tape.
 - » Overall Screen2: Tinned copper braid, 65% coverage.
 - » Sheath: PVC (V type)/LSZH (H type).
 - » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue.
- 

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	207
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118304V	4	0.25	0.81	8.1
BE118304H	4	0.25	0.81	8.1



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8305

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

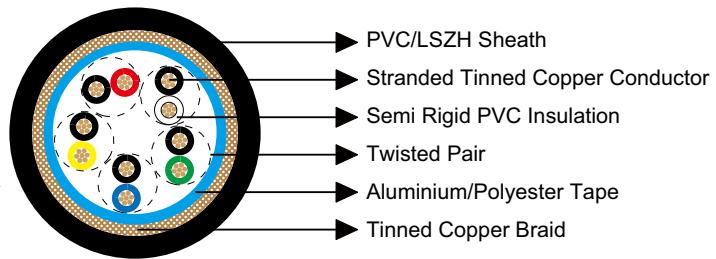

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	207
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118305V	5	0.25	0.81	8.2
BE118305H	5	0.25	0.81	8.2



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8306

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

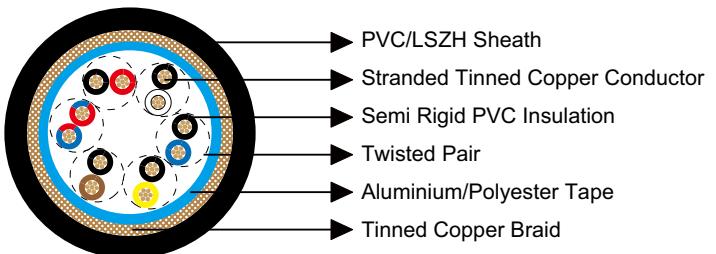

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	207
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118306V	6	0.25	0.81	8.8
BE118306H	6	0.25	0.81	8.8



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8307

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

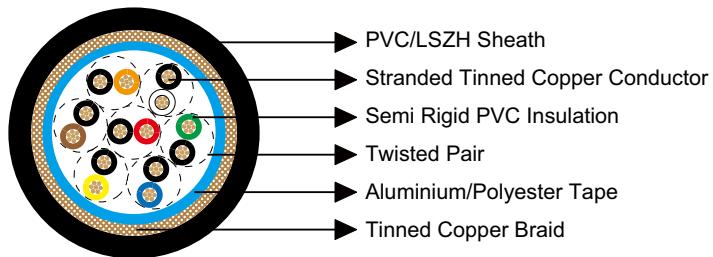

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	207
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE118307V	7	0.25	0.81	8.8
BE118307H	7	0.25	0.81	8.8



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8310

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

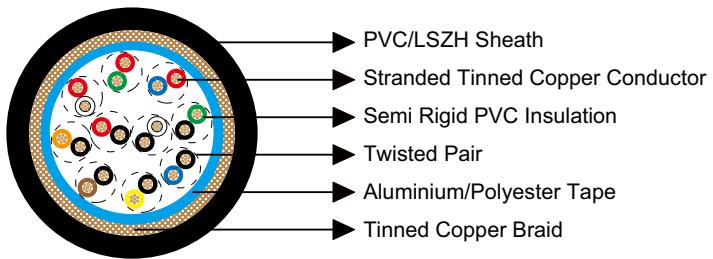

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	207
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118310V	10	0.25	0.81	11.2
BE118310H	10	0.25	0.81	11.2



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8315

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

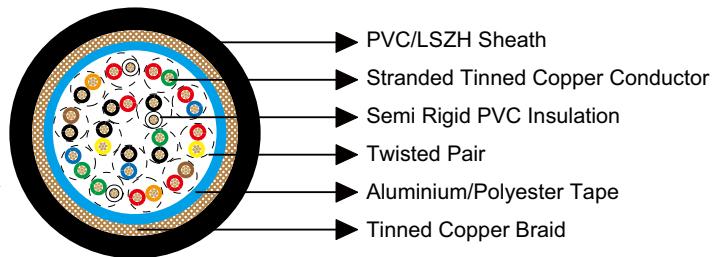

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	207
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118315V	15	0.25	0.81	12.8
BE118315H	15	0.25	0.81	12.8



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8325

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Semi-Rigid PVC.
- » Overall Screen1: Aluminium/Polyester tape.

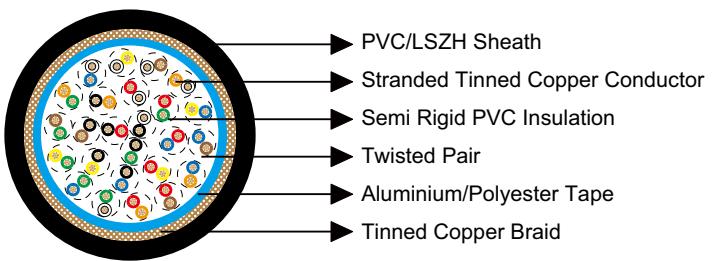

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown, Green & Orange, White & Blue, White & Yellow, White & Brown, White & Orange, Blue & Yellow, Blue & Brown, Blue & Orange.

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		7x0.254
UL Style		2464
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	115
Nominal Capacitance Conductor to Screen	pF/m	207
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118325V	25	0.25	1.47	15.8
BE118325H	25	0.25	1.47	15.8



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9841

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 485 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 90% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White.



» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	42
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119841V	1	0.6	0.81	5.9
BE119841H	1	0.6	0.81	5.9



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9842

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 485 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 90% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White.

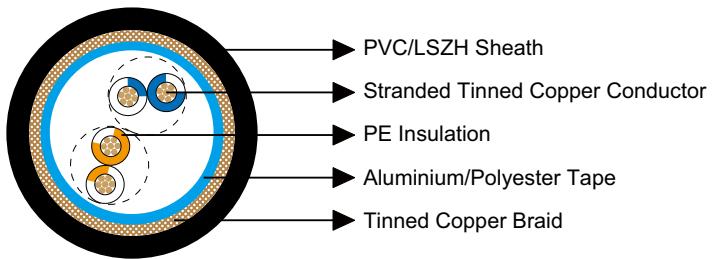

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	42
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE119842V	2	0.6	0.81	8.6
BE119842H	2	0.6	0.81	8.6



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9843

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 485 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 90% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White.



» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	42
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE119843V	3	0.6	0.81	9.2
BE119843H	3	0.6	0.81	9.2



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9844

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 485 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 90% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White.

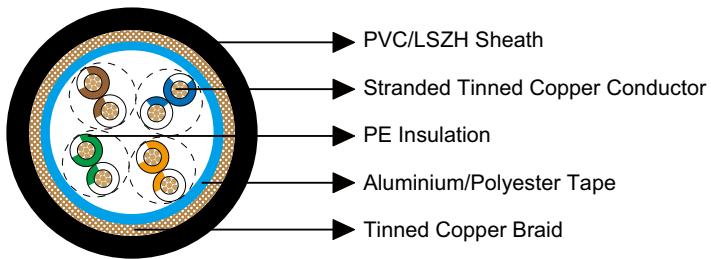

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	42
Nominal Capacitance Conductor to Screen	pF/m	76
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE119844V	4	0.6	0.81	9.9
BE119844H	4	0.6	0.81	9.9



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9829

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 232 & RS 422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White.

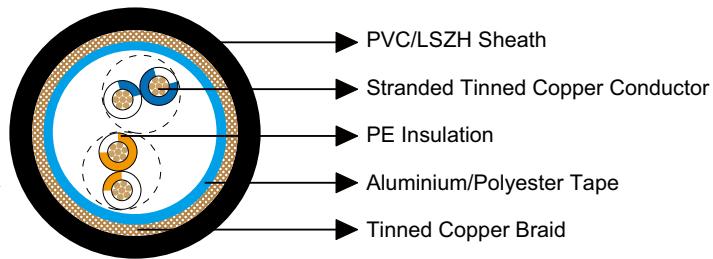

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE119829V	2	0.38	0.81	6.5
BE119829H	2	0.38	0.81	6.5



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9830

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 232 & RS 422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.

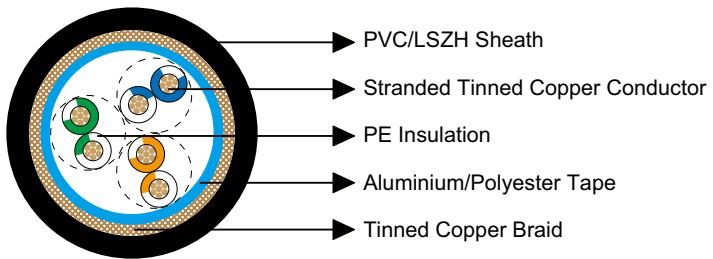

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119830V	3	0.38	0.81	7.4
BE119830H	3	0.38	0.81	7.4



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9831

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 232 & RS 422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White.

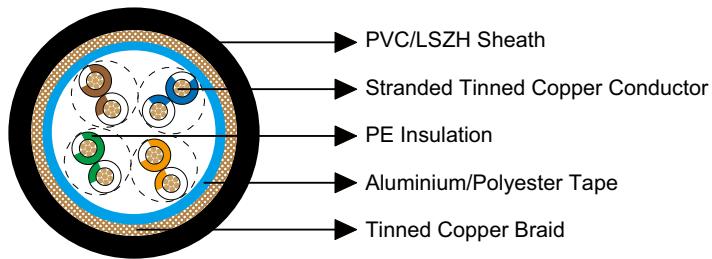

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119831V	4	0.38	0.81	8.0
BE119831H	4	0.38	0.81	8.0



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9832

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 232 & RS 422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White.

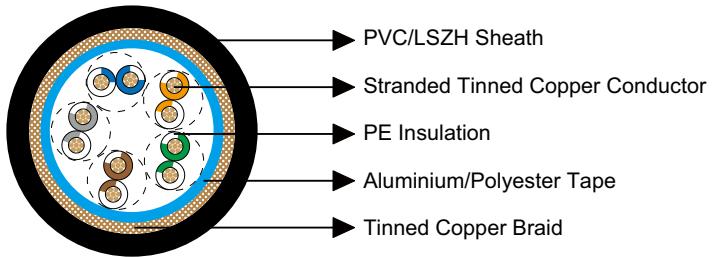

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119832V	5	0.38	0.81	8.6
BE119832H	5	0.38	0.81	8.6



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9833

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 232 & RS 422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.

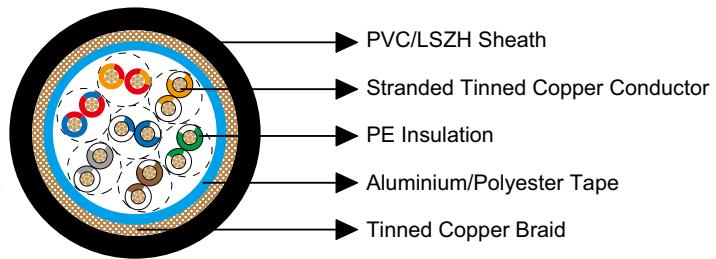

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119833V	7	0.4	0.81	9.3
BE119833H	7	0.4	0.81	9.3



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9835

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 232 & RS 422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.

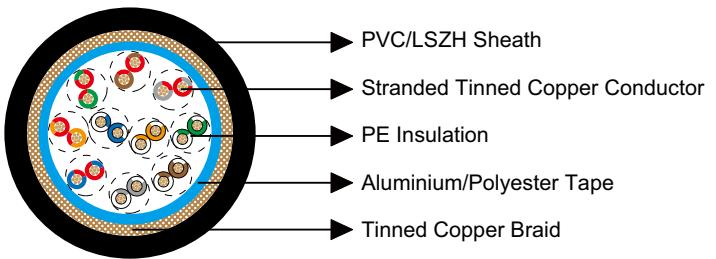

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119835V	10	0.38	0.81	11.7
BE119835H	10	0.38	0.81	11.7



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9836

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 232 & RS 422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.

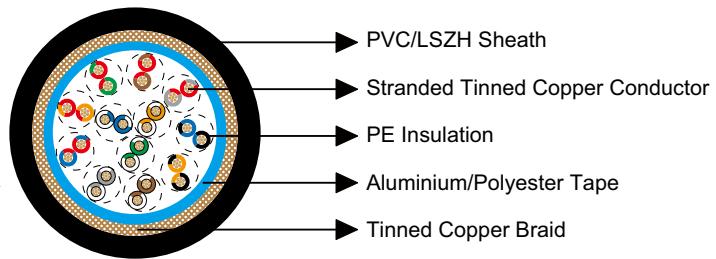

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE119836V	12	0.38	0.97	12.2
BE119836H	12	0.38	0.97	12.2



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9837

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 232 & RS 422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.

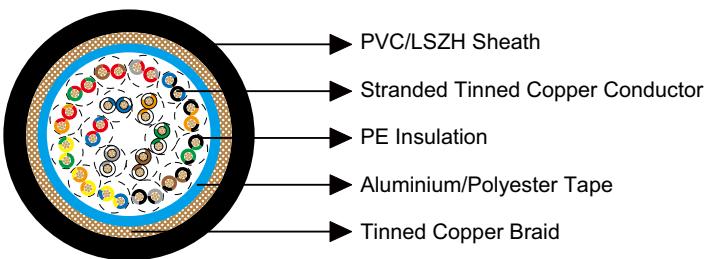

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black, Black/Green & Green/Black, Black/Brown & Brown/Black, Black/Gray & Gray/Black, Yellow/Blue & Blue/Yellow, Yellow/Orange & Orange/Yellow, Yellow/Green & Green/Yellow.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119837V	18	0.38	0.97	14.4
BE119837H	18	0.38	0.97	14.4



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9838

» Application

These cables have pairs laid up in a Foil & Braid screen, suitable for RS 232 & RS 422 applications.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.

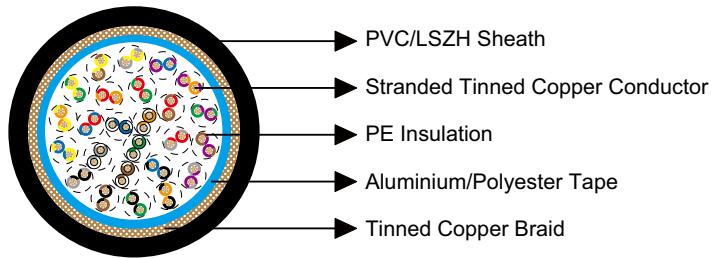

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black, Black/Green & Green/Black, Black/Brown & Brown/Black, Black/Gray & Gray/Black, Yellow/Blue & Blue/Yellow, Yellow/Orange & Orange/Yellow, Yellow/Green & Green/Yellow, Yellow/Brown & Brown/Yellow, Yellow/Gray & Gray/Yellow, Purple/Blue & Blue/Purple, Purple/Orange & Orange/Purple, Purple/Green & Green/Purple, Purple/Brown & Brown/Purple, Purple/Gray & Gray/Purple.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE119838V	25	0.38	0.97	17.0
BE119838H	25	0.38	0.97	17.0



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 9855

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS 232 and CAD/CAM applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PE.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 58% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Red & Blue, Black & Yellow.

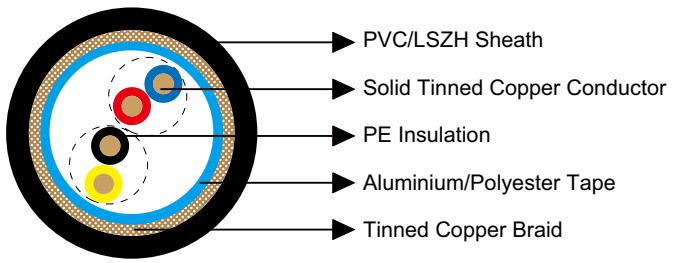

» Electrical & Mechanical Characteristics

AWG		22
Conductor Construction		Solid
UL Style		2582
Maximum Conductor Resistance	Ω/km	54.8
Voltage Rating	V	150
Nominal Capacitance Conductor to Conductor	pF/m	51
Nominal Capacitance Conductor to Screen	pF/m	90
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE119855V	2	0.4	0.813	6.9
BE119855H	2	0.4	0.813	6.9



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8102

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Overall Screen1: Aluminium/Polyester tape.

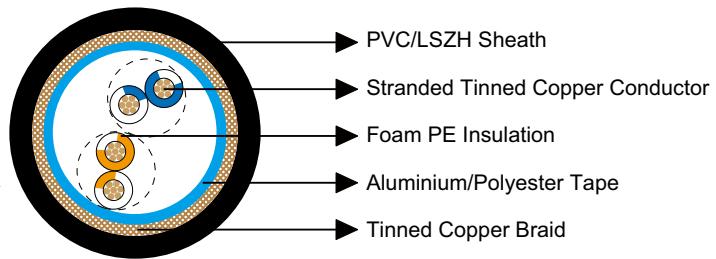

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter
				mm
BE118102V	2	0.4	0.813	6.9
BE118102H	2	0.4	0.813	6.9



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8105

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Overall Screen1: Aluminium/Polyester tape.

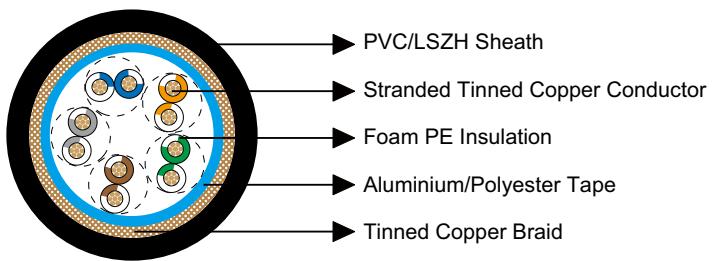

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness mm	Sheath Thickness mm	Overall Diameter mm
BE118105V	5	0.4	0.813	8.6
BE118105H	5	0.4	0.813	8.6



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8110

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Overall Screen1: Aluminium/Polyester tape.

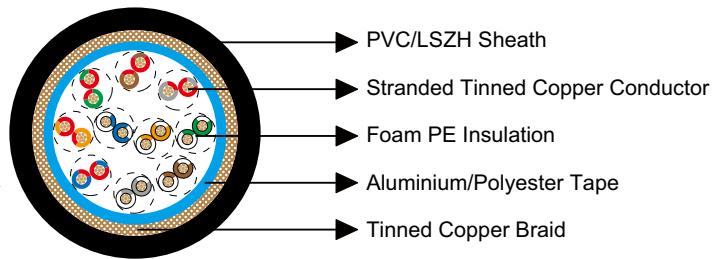

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118110V	10	0.4	0.97	12.0
BE118110H	10	0.4	0.97	12.0



Caledonian Belden Equivalent Cables

Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8115

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Overall Screen1: Aluminium/Polyester tape.

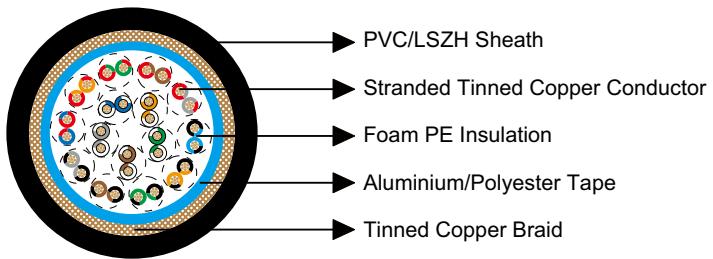

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black, Black/Green & Green/Black, Black/Brown & Brown/Black, Black/Gray & Gray/Black.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118115V	15	0.4	1.22	14.0
BE118115H	15	0.4	1.22	14.0



Multipair Overall Foil & Braid Screened Cables


Multipair Overall Foil & Braid Screened Cables-Belden Equivalent 8125

» Application

These cables have pairs laid up in a Foil & Braid screen. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Overall Screen1: Aluminium/Polyester tape.

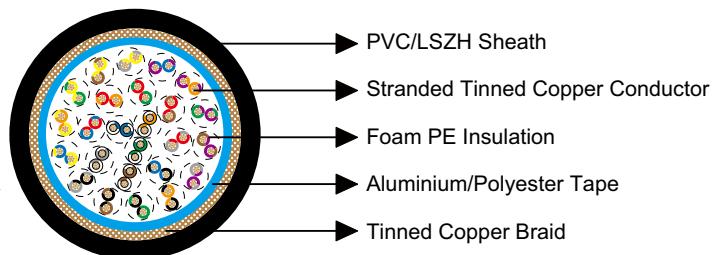

- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).

» Insulation Colour: White/Blue & Blue/White, White/Orange & Orange/White, White/Green & Green/White, White/Brown & Brown/White, White/Gray & Gray/White, Red/Blue & Blue/Red, Red/Orange & Orange/Red, Red/ Green & Green/Red, Red/Brown & Brown/Red, Red/Gray & Gray/Red, Black/Blue & Blue/Black, Black/Orange & Orange/Black, Black/Green & Green/Black, Black/Brown & Brown/Black, Black/Gray & Gray/Black, Yellow/Blue & Blue/Yellow, Yellow/Orange & Orange/Yellow, Yellow/Green & Green/Yellow, Yellow/Brown & Brown/Yellow, Yellow/Gray & Gray/Yellow, Purple/Blue & Blue/Purple, Purple/Orange & Orange/Purple, Purple/Green & Green/Purple, Purple/Brown & Brown/Purple, Purple/Gray & Gray/Purple.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2919
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	30
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-30~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118125V	25	0.4	1.22	17.2
BE118125H	25	0.4	1.22	17.2



Multipair Individually and Overall Screened Cables


Multipair Individually and Overall Screened Cables-Belden Equivalent 8162

» Application

These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

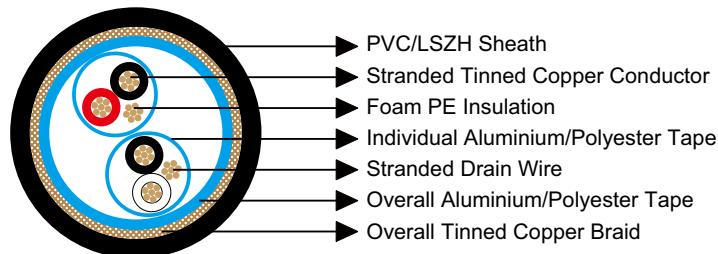

- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118162V	2	0.47	1.19	8.7
BE118162H	2	0.47	1.19	8.7



Multipair Individually and Overall Screened Cables


Multipair Individually and Overall Screened Cables-Belden Equivalent 8163

» Application

These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

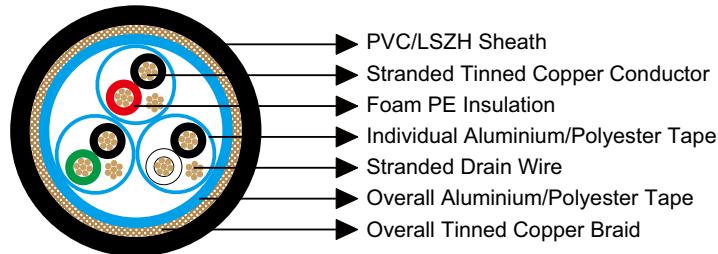

- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118163V	3	0.47	1.22	9.1
BE118163H	3	0.47	1.22	9.1



Caledonian Belden Equivalent Cables

Multipair Individually and Overall Screened Cables

Multipair Individually and Overall Screened Cables-Belden Equivalent 8164

» Application


These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue.

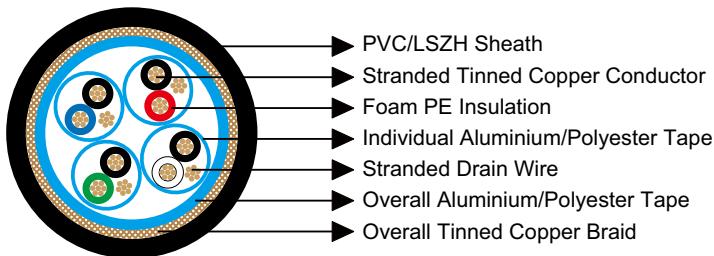

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118164V	4	0.47	1.22	9.9
BE118164H	4	0.47	1.22	9.9



Multipair Individually and Overall Screened Cables


Multipair Individually and Overall Screened Cables-Belden Equivalent 8165

» Application

These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

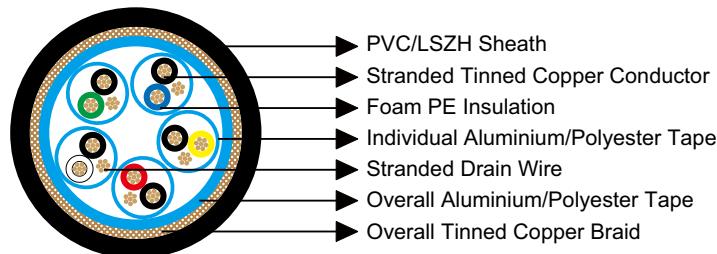

- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118165V	5	0.47	1.22	10.5
BE118165H	5	0.47	1.22	10.5



Caledonian Belden Equivalent Cables

Multipair Individually and Overall Screened Cables

Multipair Individually and Overall Screened Cables-Belden Equivalent 8166

» Application


These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown.

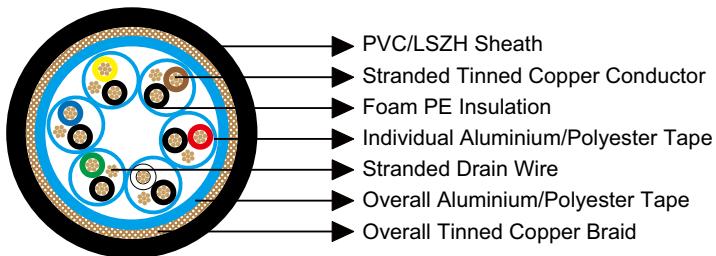

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118166V	6	0.47	1.22	11.3
BE118166H	6	0.47	1.22	11.3



Multipair Individually and Overall Screened Cables


Multipair Individually and Overall Screened Cables-Belden Equivalent 8167

» Application

These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/
Polyester tape.
- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange.

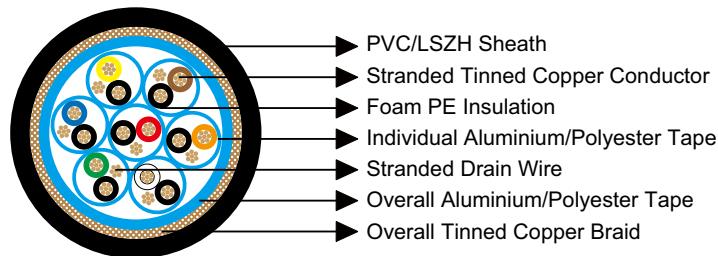

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118167V	7	0.47	1.22	11.3
BE118167H	7	0.47	1.22	11.3



Caledonian Belden Equivalent Cables

Multipair Individually and Overall Screened Cables

Multipair Individually and Overall Screened Cables-Belden Equivalent 8168

» Application


These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

Polyester tape.

- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White.

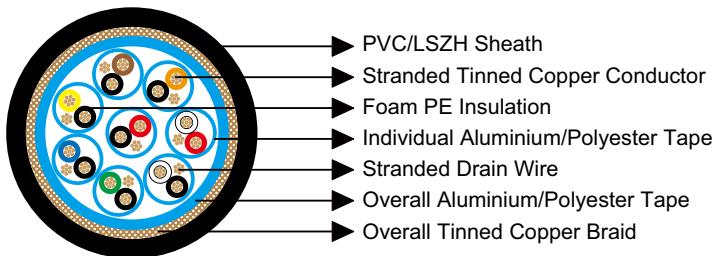

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118168V	8	0.47	1.22	12.2
BE118168H	8	0.47	1.22	12.2



Multipair Individually and Overall Screened Cables

Multipair Individually and Overall Screened Cables-Belden Equivalent 8170


» Application

These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

Polyester tape.

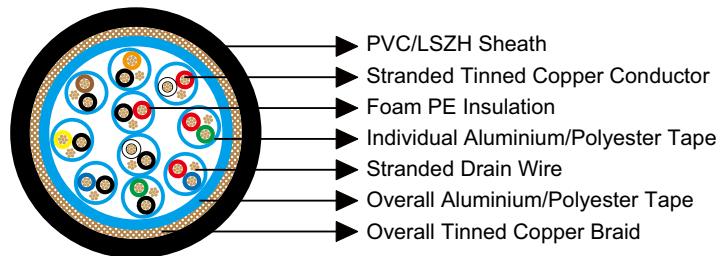

- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118170V	10	0.47	1.22	14.8
BE118170H	10	0.47	1.22	14.8



Caledonian Belden Equivalent Cables


Multipair Individually and Overall Screened Cables

Multipair Individually and Overall Screened Cables-Belden Equivalent 8175

» Application

These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
 - » Insulation: Foam PE.
 - » Individual Screen: Aluminium/Polyester tape.
 - » Drain Wire: Tinned copper wire.
 - » Overall Screen1: Aluminium/Polyester tape.
 - » Overall Screen2: Tinned copper braid, 65% coverage.
 - » Sheath: PVC (V type)/LSZH (H type).
 - » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue.
- 

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm		
BE118175V	15	0.47	1.22	16.9
BE118175H	15	0.47	1.22	16.9



Multipair Individually and Overall Screened Cables


Multipair Individually and Overall Screened Cables-Belden Equivalent 8178

» Application

These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

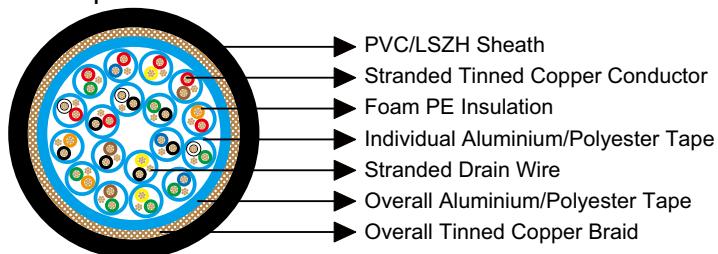

- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown, Green & Orange.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118178V	18	0.47	1.22	17.4
BE118178H	18	0.47	1.22	17.4



Caledonian Belden Equivalent Cables

Multipair Individually and Overall Screened Cables

Multipair Individually and Overall Screened Cables-Belden


Equivalent 8185

» Application

These cables have individually screened pairs laid up in a Foil & Braid screen. Each individually screened pair has a 24AWG stranded tinned copper drain wire. These cables are suitable for EIA RS-232 and EIA RS-422 applications, used as computer cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Foam PE.
- » Individual Screen: Aluminium/Polyester tape.

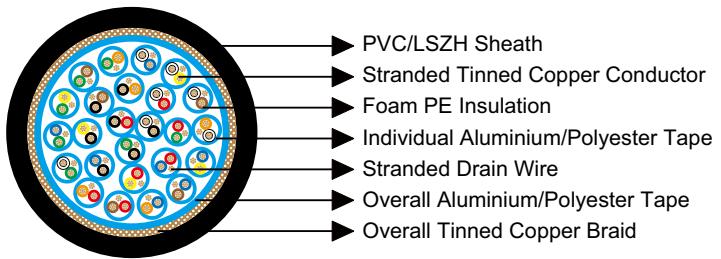

- » Drain Wire: Tinned copper wire.
- » Overall Screen1: Aluminium/Polyester tape.
- » Overall Screen2: Tinned copper braid, 65% coverage.
- » Sheath: PVC (V type)/LSZH (H type).
- » Insulation Colour: Black & Red, Black & White, Black & Green, Black & Blue, Black & Yellow, Black & Brown, Black & Orange, Red & White, Red & Green, Red & Blue, Red & Yellow, Red & Brown, Red & Orange, Green & White, Green & Blue, Green & Yellow, Green & Brown, Green & Orange, White & Blue, White & Yellow, White & Brown, White & Orange, Blue & Yellow, Blue & Brown, Blue & Orange.

» Electrical & Mechanical Characteristics

AWG		24
Conductor Construction		7x0.2
UL Style		2493
Maximum Conductor Resistance	Ω/km	85
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	41
Nominal Capacitance Conductor to Screen	pF/m	72
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-40~60

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118185V	25	0.47	1.22	20.9
BE118185H	25	0.47	1.22	20.9



Multipair Unscreened Cables


Multipair Unscreened Cables-Belden Equivalent 8471

» Application

These cables are used as high-conductivity copper speaker cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: PVC/LSZH.
- » Sheath: FRPVC (V type)/LSZH (H type).
- » Insulation Colour: Black, White.

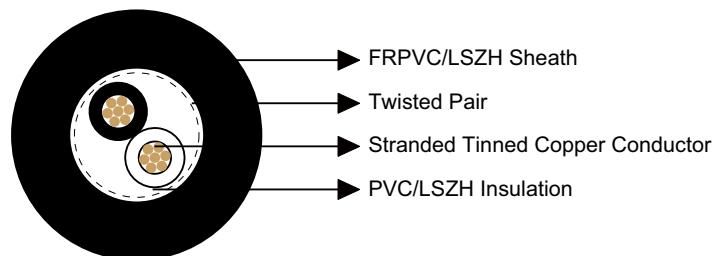

» Electrical & Mechanical Characteristics

AWG		16
Conductor Construction		19x0.287
UL Style		2598
Maximum Conductor Resistance	Ω/km	14.73
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	108.3
Bending Radius		19xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118471V	1	0.584	0.81	6.96
BE118471H	1	0.584	0.81	6.96



Caledonian Belden Equivalent Cables

Special Belden Equivalent Cables


FR Multipair Unscreened Cables-FR Belden Equivalent 8471

» Application

These fire resistant cables are used as high-conductivity copper speaker cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Mica tape+LSZH.
- » Sheath: LSZH.
- » Insulation Colour: Black, White.

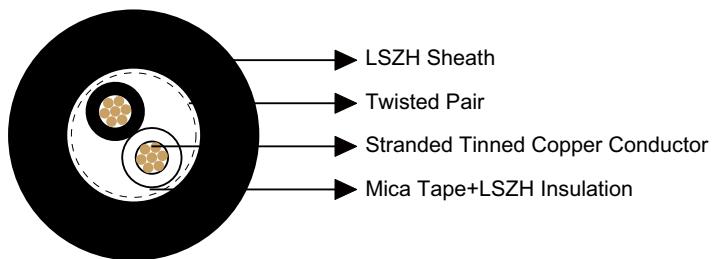

» Fire Performance

Circuit Integrity	IEC 60331-21; BS 6387 CWZ; DIN VDE 0472-814(FE180); CEI 20-36/2-1; SS229-1; NBN C 30-004 (cat. F3); NF C32-070-2.3(CR1)
System circuit integrity	DIN 4102-12, E30 depending on lay system
Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*
Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454

Note: Asterisk * denotes superseded standard.



Special Belden Equivalent Cables

» Electrical & Mechanical Characteristics

AWG		16
Conductor Construction		19x0.287
UL Style		2598
Maximum Conductor Resistance	Ω/km	15.8
Voltage Rating	V	300
Nominal Capacitance Conductor to Conductor	pF/m	108.3
Bending Radius		19xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118471FR	1	0.584	0.81	7.46



FR Multipair Overall Screened Cables-FR Belden Equivalent 8719

» Application


These fire resistant multipair overall screened cables have pairs laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables.

» Construction

- » Conductor: Tinned copper wire.
- » Insulation: Mica Tape+PE.
- » Overall Screen: Aluminium/Polyester

tape.

- » Drain Wire: Tinned copper wire.
- » Sheath: LSZH.
- » Insulation Colour: Black, Clear.

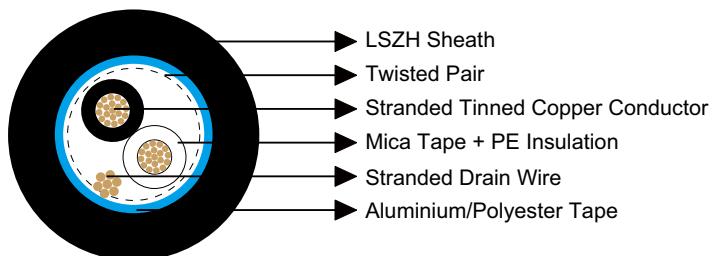

» Fire Performance

Circuit Integrity	IEC 60331-21; BS 6387 CWZ; DIN VDE 0472-814(FE180); CEI 20-36/2-1; SS229-1; NBN C 30-004 (cat. F3); NF C32-070-2.3(CR1)
System circuit integrity	DIN 4102-12, E30 depending on lay system
Flame Retardance (Single Vertical Wire Test)	EN 60332-1-2; IEC 60332-1-2; BS EN 60332-1-2; VDE 0482-332-1 ; NBN C 30-004 (cat. F1); NF C32-070-2.1(C2); CEI 20-35/1-2; EN 50265-2-1*; DIN VDE 0482-265-2-1*
Reduced Fire Propagation (Vertically-mounted bundled wires & cable test)	EN 60332-3-24 (cat. C); IEC 60332-3-24; BS EN 60332-3-24; VDE 0482-332-3; NBN C 30-004 (cat. F2); NF C32-070-2.2(C1); CEI 20-22/3-4; EN 50266-2-4*; DIN VDE 0482-266-2-4
Halogen Free	IEC 60754-1; EN 50267-2-1; DIN VDE 0482-267-2-1; CEI 20-37/2-1 ; BS 6425-1*
No Corrosive Gas Emission	IEC 60754-2; EN 50267-2-2; DIN VDE 0482-267-2-2; CEI 20-37/2-2 ; BS 6425-2*



Special Belden Equivalent Cables

Minimum Smoke Emission	IEC 61034-1&2; EN 61034 -1&2; DIN VDE 0482-1034-1&2; CEI 20-37/3-1&2; EN 50268-1&2*; BS 7622-1&2*
No Toxic gases	NES 02-713; NF C 20-454

Note: Asterisk * denotes superseded standard.

» Electrical & Mechanical Characteristics

AWG		16
Conductor Construction		19x0.287
UL Style		20253
Maximum Conductor Resistance	Ω/km	15.8
Voltage Rating	V	600
Nominal Capacitance Conductor to Conductor	pF/m	76
Nominal Capacitance Conductor to Screen	pF/m	144
Bending Radius		10xOverall Diameter
Operating Temperature	°C	-20~80

» Dimensions

Ordering Code	No. of Pairs	Insulation Thickness	Sheath Thickness	Overall Diameter
		mm	mm	mm
BE118719FR	1	0.81	0.81	8.45

UNITED KINGDOM

MERCHANTS Industrial Centre,
Mill Lane, Laughton, Lewes,
East Sussex, BN8 6AJ, UK
Tel: 44 (0) 207 419 5087
Fax: 44 (0) 207 831 9489
Email: sales@caledonian-cables.co.uk
www.caledonian-cables.co.uk

HONG KONG

Unit B 22/F CMA Building,
64-66 Connaught Road Central,
Hong Kong
Tel: 852 36527508
Fax: 852 35834834
Email: hk@caledonian-cables.co.uk
www.caledonian-cables.co.uk