

NEK606 Caledonian Offshore & Marine Cables

Fire Resistant Medium Voltage Power Cables




www.caledonian-cables.co.uk

P7 or P7/P14 BFOU 6/10kV


Applications

These cables are fire resistant, flame retardant, low smoke, halogen free and mud resistant, used for fixed installation for medium voltage power.

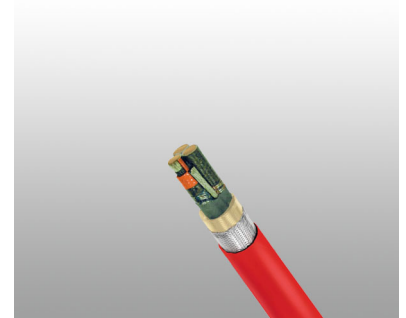

Standards

- IEC 60092-354
- IEC 60092-351
- IEC 60092-359
- IEC 60331-21
- IEC 60332-1
- IEC 60332-3-22
- IEC 60754-1,2
- IEC 61034-1,2
- NEK 606:2004

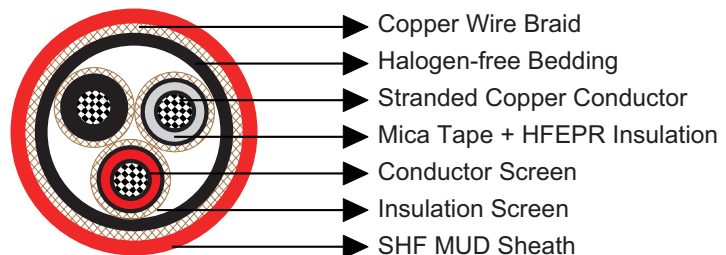

Construction

- **Conductors:** Circular tinned annealed stranded copper to IEC 60228 class 2.
- **Conductor Screen:** Semi conducting material.
- **Insulation:** Mica tape + Halogen free EPR.
- **Insulation Screen:** Semi conducting material and tinned copper wire braid.
- **Bedding:** Halogen free compound.
- **Armour:** Tinned copper wire braid.
- **Outer Sheath:** Halogen free thermosetting compound, SHF2 (for TYPE P7), or halogen free mud resistant thermosetting compound, SHF MUD (for TYPE P7/P14), coloured red.



Electrical Characteristics

Nominal Cross Section Area	mm ²	25	35	50	70	95	120	150
Nominal Conductor Diameter	mm	6.5	7.4	8.7	10.3	12.2	13.8	15.1
Maximum DC Resistant@20°C	Ω/km	0.734	0.529	0.391	0.27	0.195	0.154	0.126
Continuous Current Rating@45°C 1 Core	A	127	157	196	242	293	339	389
Continuous Current Rating@45°C 3 Core	A	89	110	137	169	205	237	272
Short Circuit Current 1s	A	3580	5010	7150	10020	13590	17170	21460
Operating Voltage	KV	6/10	6/10	6/10	6/10	6/10	6/10	6/10

Nominal Cross Section Area	mm ²	185	240	300	400	500	630
Nominal Conductor Diameter	mm	17.0	19.6	21.9	24.5	27.5	32.3
Maximum DC Resistant@20°C	Ω/km	0.1	0.0762	0.0607	0.0475	0.0369	0.0286
Continuous Current Rating@45°C 1 Core	A	444	522	601	690	780	890
Continuous Current Rating@45°C 3 Core	A	311	365	421	483	546	623
Short Circuit Current 1s	A	26470	34340	42930	57230	71540	90140
Operating Voltage	KV	6/10	6/10	6/10	8.7/15	8.7/15	8.7/15

Ambient Temperature Correction Factors

Ambient Temperature Correction Factors	35	40	45	50	55	60	65	70	75	80
Rating Factor	1.1	1.05	1.0	0.94	0.88	0.82	0.74	0.67	0.58	0.47

Mechanical and Thermal Properties

- Bending Radius: 15×OD (during installation); 9×OD (fixed installed)
- Temperature Range: -20°C ~ +90°C

Dimensions and Weight

Construction No. of cores×Cross section(mm ²)	Nominal Insulation Thickness mm	Nominal Sheath Thickness mm		Nominal Overall Diameter mm	Nominal Weight kg/km
		Inner	Outer		
1×16	3.4	1.0	1.6	25.6	990
1×25	3.4	1.0	1.7	27.1	1150



Fire Resistant Medium Voltage Power Cables

www.caledonian-cables.co.uk

Construction No. of cores×Cross section(mm ²)	Nominal Insulation Thickness mm	Nominal Sheath Thickness mm		Nominal Overall Diameter mm	Nominal Weight kg/km
		Inner	Outer		
1×35	3.4	1.0	1.7	28.5	1320
1×50	3.4	1.0	1.8	29.9	1500
1×70	3.4	1.0	1.8	31.9	1810
1×95	3.4	1.0	1.9	34.0	2160
1×120	3.4	1.2	2.0	36.1	2610
1×150	3.4	1.2	2.1	38.1	2990
1×185	3.4	1.2	2.2	39.9	3440
1×240	3.4	1.2	2.3	43.1	4180
1×300	3.4	1.2	2.4	45.9	4930
1×400	3.4	1.4	2.5	49.0	5900
1×500	3.4	1.4	2.6	52.5	7070
1×630	3.4	1.4	2.8	57.0	8690
3×16	3.4	1.4	2.4	50.2	3780
3×25	3.4	1.4	2.6	53.2	4380
3×35	3.4	1.4	2.7	56.4	5040
3×50	3.4	1.4	2.8	59.3	5740
3×70	3.4	1.6	2.9	63.7	6900
3×95	3.4	1.6	3.1	68.4	8270
3×120	3.4	1.6	3.2	72.1	9470
3×150	3.4	1.6	3.4	76.0	10800
3×185	3.4	1.8	3.5	80.8	12370
3×240	3.4	1.8	3.8	88.2	15040
3×300	3.4	2.0	3.9	94.0	17450

