


# Chinese Standard Rolling Stock Cables

## Super-thin Wall Unsheathed Single Core Cables DTRF 750V

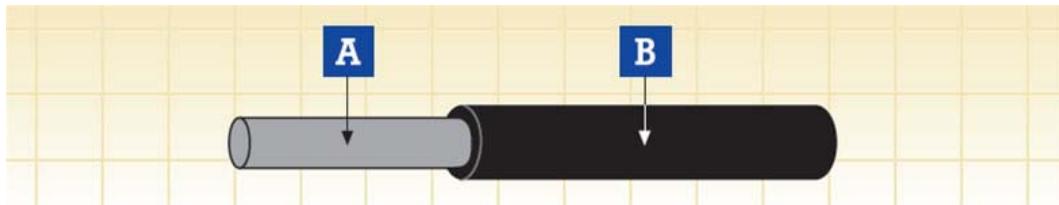

A. Conductor B. Insulation

### Application

- Used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor.
- Used in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

### Construction

#### Conductor

Tinned copper wires

#### Insulation

Electron beam crosslinkable LSZH compound

### Electrical & Mechanical Properties

Nominal Voltage

750V

Short Circuit Temperature (5s)


250°C

Operating Temperature

-60°C/+125°C

Minimum Bending Radius

3 x Overall Diameter (OD≤20mm); 5 x Overall Diameter (OD≥20mm)

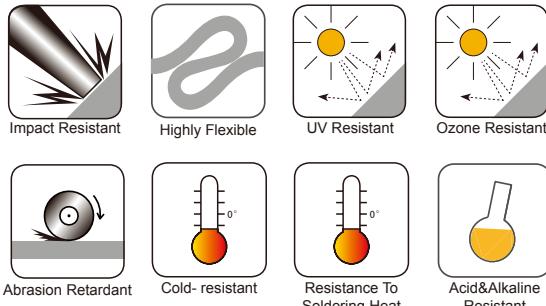

### Fire Performance

Flame Retardant

GB/T18380.1-2001 DZ-1

Low Corrosivity (Acidity & Conductivity)

GB/T17650.1-1998; GB/T17650.2-1998

Halogen Free

GB/T17650.1-1998; GB/T17650.2-1998

Low Smoke

GB/T17651.1-1998; GB/T17651.2-1998

### DTRF 750V

Nominal Cross-Sectional Area	Conductor Construction	Nominal Insulation Thickness	Maximum Overall Diameter	Weight	Maximum Conductor Resistance 20°C
mm <sup>2</sup>	No/mm	mm	mm	kg/km	Ω/km
0.5	19/0.18	0.30	1.50	7.6	40.1
0.75	19/0.23	0.35	1.85	12.1	26.7
1.0	19/0.26	0.35	2.00	14.5	20.0
1.2	19/0.28	0.35	2.16	16.3	17.6
1.5	19/0.32	0.40	2.40	21.3	13.7
2.5	19/0.41	0.45	2.95	33.6	8.21
4.0	19/0.52	0.45	3.50	50.8	5.00



IRM 903  
Fuel Oil Resistant



IRM 902  
Mineral Oil Resistant



Fire Retardant  
NF C32-070-2.2(C2)  
IEC60332-3-24/EN50266-2-4




Flame Retardant  
NF C32-070-2.1(C1)  
IEC60332-1-2/EN50265-2-1




Low Toxicity  
NF X70-100/NF F63 808  
TM1-04/BS 6853



Low Corrosivity  
IEC60754-2/EN50267-2-2/3  
NF C32-074/VDE 0472-813



Low Smoke Emission  
IEC 61034-2 / EN 50268-2  
NF C32-073/VDE 0472-816



Zero Halogen  
IEC 60754-1/EN 50267-2-1  
NF C32-074/VDE 0472-815