




I-V(ZN)YY Fibre Optic Breakout Cable

» Application

These flexible and robust cables are designed for industrial use, suitable for fixed and normal flexible installations.

» Standards

DIN VDE 0888
IEC 60794

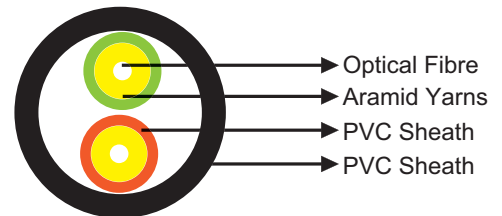

» Construction

Core Type: Tight buffer.
Strain Relief: Aramid yarns.
Break-out Unit Sheath: PVC.
Outer Sheath: PVC.

» Technical Data

Operating Temperatures	-40°C~+80°C
Minimum Bending Radius	During Installation: 60mm; Installation: 45mm
Torsion Application	180°/m
Flame Retardant	IEC 60332-1/IEC 60332-3/UL 1685 FT1+FT4
Oil Resistant	Yes
Ozone Resistant	Yes
UV Resistant	Yes

» Dimensions and Weight

Construction	Fibre Type	Nominal Overall Diameter	Nominal Weight
No. of fibres		mm	kg/km
2	HCS 200/230	7.5	68