





# Caledonian

Aluminium Conductor Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## 600/1000V ABC –Aerial Bundled Cables to NFC 33-209 (AL/XLPE) 1C54.6+3C70+2C25

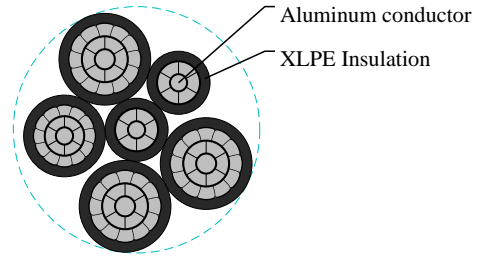

### APPLICATIONS

The aerial bundled cables designed for fixed installation as overhead power lines up to 1000 V incl.

### STANDARDS

NFC 33-209

### CABLE CONSTRUCTION

Phase Conductor:Aluminium conductor, round stranded compressed (RM).

Neutral Conductor:Alloy aluminium conductor (AlMgSi), round stranded compressed (RM).

Insulation:XLPE. Load-bearing / neutral core – marked with standard and producers phase core – marked with digits 1, 2, 3.

Assembly:Cores and the neutral, conductor stranded together in right-hand lay, additionally 1, 2 or 3 cores of reduced cross section can be co-stranded.

### PHYSICAL AND THERMAL PROPERTIES

Rated voltage:0.6/1 kV

Test voltage:4/50 Veff kV/Hz

Laying temperature:min. -5 °C

Operating temperature:-30 ~ +90 °C

Conductor temperature:max. +90 °C

Short-circuit temperature:max. +250 /5 °C/s

Bending radius (min.):20 × o of cable

### DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	Approx. Overall Diameter	Cable Weight	max. conductor resistance	min. breaking load of conductor strand	Current rating in the air
No. ×mm <sup>2</sup>	mm	kg/km	Ω/km	kN	A
1x54.6 RM+3x70 RM+2x25 RM	45.2	1150	0.63/0.443/1.2	10.2/3.8	205/107