





Caledonian

Cables For Oil Industry
www.caledonian-cables.com

marketing@caledonian-cables.com

600V/1000V XLPE Insulated Steel Wire Armored Cable to IEC 60502-1

XLPE Insulated Steel Wire Armored Cable 2C300

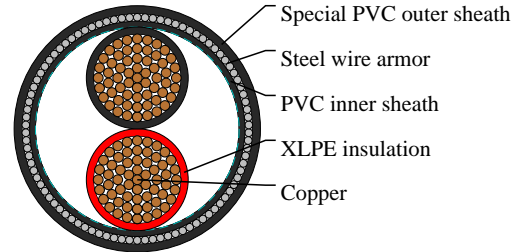

APPLICATIONS

These cables are used for electricity supply in low voltage installation system. They are suitable for installation in indoors and outdoors, in cable ducts, under ground, in power and switching stations, local energy distributions, industrial plants, where require chemical and mechanical protections.

CABLE CONSTRUCTION

Conductor: Stranded copper
Insulation: XLPE
Inner sheath: PVC. Color: black
Armor: Galvanized steel wires
Sheath: Special PVC. Color: black

COLOUR CODE

2 Cores: Red, Black

PHYSICAL AND THERMAL PROPERTIES

Rated voltage: 600V/1000V
Fire retardance: IEC 60332-3-22
Operating temperature: -20~60°C
Max. conductor operating temperature: 90°C
Chemical resistance: Aliphatic and aromatic hydrocarbon resistance

DIMENSION AND PARAMETERS

No. of Cores	Nominal Cross-sectional Area	Conductor Class	Nominal Diameter over Insulation	Diameter Over Inner Sheath	Overall Diameter (min.)	Overall Diameter (max.)	Nominal Diameter Over Armour	Approx. Weight
	mm ²		mm	mm	mm	mm	mm	kg/km
2	300	Stranded, Class 2	24.2	52	60.72	67	57	11248