





Caledonian

Cables For Oil Industry
www.caledonian-cables.com

marketing@caledonian-cables.com

600V/1000V XLPE Insulated Steel Wire Armored Cable to IEC 60502-1

XLPE Insulated Steel Wire Armored Cable 2C95

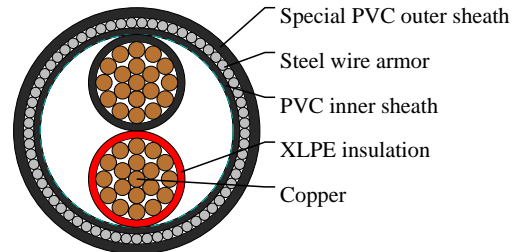

APPLICATIONS

These cables are used for electricity supply in low voltage installation system. They are suitable for installation in indoors and outdoors, in cable ducts, under ground, in power and switching stations, local energy distributions, industrial plants, where require chemical and mechanical protections.

CABLE CONSTRUCTION

Conductor: Stranded copper

Insulation: XLPE

Inner sheath: PVC. Color: black

Armor: Galvanized steel wires

Sheath: Special PVC. Color: black

COLOUR CODE

2 Cores: Red, Black

PHYSICAL AND THERMAL PROPERTIES

Rated voltage: 600V/1000V

Fire retardance: IEC 60332-3-22

Operating temperature: -20~60°C

Max. conductor operating temperature: 90°C

Chemical resistance: Aliphatic and aromatic hydrocarbon resistance

DIMENSION AND PARAMETERS

| No. of Cores | Nominal Cross-sectional Area | Conductor Class | Nominal Diameter over Insulation | Diameter Over Inner Sheath | Overall Diameter (min.) | Overall Diameter (max.) | Nominal Diameter Over Armour | Approx. Weight |
|--------------|------------------------------|-------------------|----------------------------------|----------------------------|-------------------------|-------------------------|------------------------------|----------------|
| | mm ² | | mm | mm | mm | mm | mm | kg/km |
| 2 | 95 | Stranded, Class 2 | 13.55 | 29.9 | 36.96 | 40.8 | 33.9 | 4086 |