



# Caledonian



Cables For Oil Industry

www.caledonian-cables.com

marketing@caledonian-cables.com

## Medium Voltage XLPE Insulated Cable to IEC 60502-2

XLPE Insulated Cable 3C240

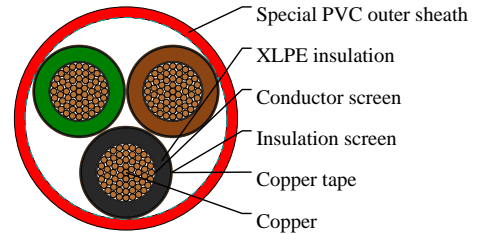

### APPLICATIONS

These cables are suitable for installation mostly in power supply stations, indoors and in cable ducts, outdoors, underground and in water as well as for installation on cable trays for industries.

### STANDARDS

IEC 60228; IEC 60502-2

### VOLTAGE RATING

8.7 / 15 (17.5) KV

### CABLE CONSTRUCTION

Conductor: Stranded bare copper (class 2)

Conductor screen: This will be an extruded layer of semi-conducting crosslinkable compound applied under simultaneous triple extrusion process over the conductor along with the insulation and the insulation screen

Insulation: XLPE

Insulation screen: This will be a layer of semi-conducting crosslinkable compound which will be applied by triple extrusion process over the insulation

Outer sheath: Special PVC. Color: red. U.V resistance can be offered upon request

### COLOUR CODE

3 Cores: Black, Green, Brown

### PHYSICAL AND THERMAL PROPERTIES

Fire retardance: IEC 60332-3-22

Operating temperature: -20~60°C

Max. conductor operating temperature: 90°C

Chemical resistance: Aliphatic and aromatic hydrocarbon resistance

### DIMENSION AND PARAMETERS

No. of Cores	Nominal Cross-sectional Area	Nominal Diameter over Insulation	Overall Diameter (min.)	Overall Diameter (max.)	Diameter over Screen	Approx. Weight
--------------	------------------------------	----------------------------------	-------------------------	-------------------------	----------------------	----------------



# Caledonian

Cables For Oil Industry  
[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

	mm <sup>2</sup>	mm	mm	mm	mm	kg/km
3	240	28.4	71.2	78.5	29.8	11535