



Caledonian


Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

M17/RG Coaxial-Cable MIL-C-17F 75Ohm

M17/77-RG 216

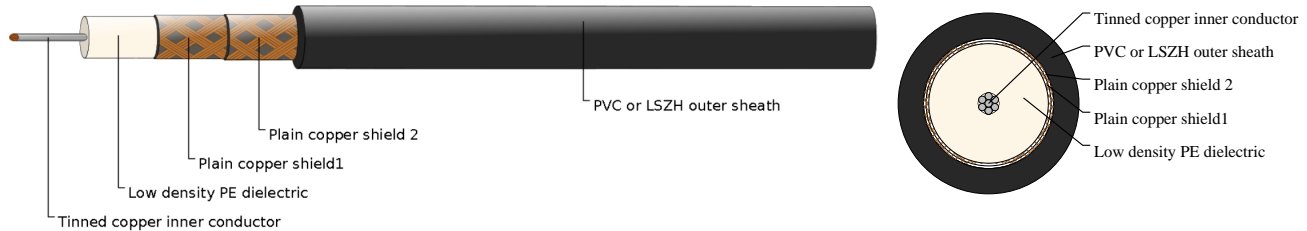

Construction

Inner conductor	Tinned copper	7 x 0.40 mm
Dielectric	Low density PE	$\Phi 7.25 \pm 0.18$ mm
Outer conductor(shield1)	Plain copper	216 x 0.16 mm
Shield coverage	/	97%
Outer conductor(shield 2)	Plain copper	192 x 0.16 mm
Shield coverage	/	96%
Outer sheath	PVC or LSZH	$\Phi 10.8 \pm 0.18$ mm

Electrical Mechanical Characteristics

Impedance	75 \pm 5 Ohm
Nominal capacitance	67 pF/m
Velocity of propagation	66%
Insulation resistance	>2000 Mohm.Km
Inner conductor resistance	20.5 Ohm/Km
Outer conductor resistance	3.3 Ohm/Km
Operating temperature range	-30 °C - +70 °C
Test/Operatig Voltage(max)	/
Copper weight	97.3 Kg/Km
Cable weight (approx.)	187 Kg/Km
Screening effectiveness	>70 dB

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)
50	4.2	1.28
100	6.2	1.89
200	9.3	2.84



Caledonian

Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

400	13.8	4.21
500	15.5	4.73
600	17.1	5.21
860	20.1	6.13
1000	23.4	7.13

Return Loss

30-300 MHz	>30dB
300-600 MHz	>27dB
600-900 MHz	>25dB