



# Caledonian


## Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

### M17/RG Coaxial-Cable RG Type Low Loss 50Ohm

RF 400 LRP

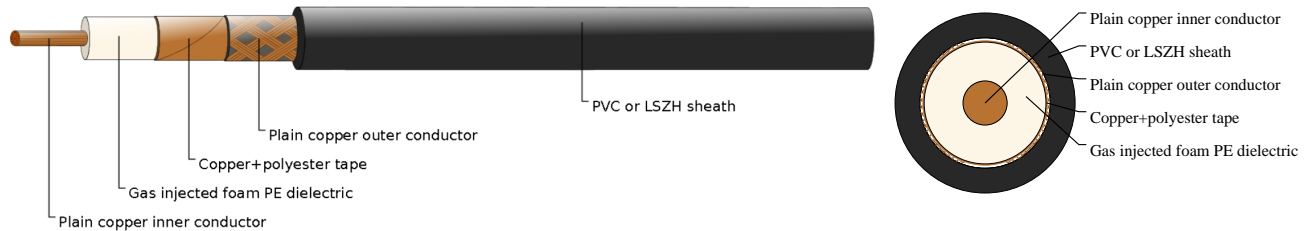

### Construction

Inner conductor	Plain copper	2.62 mm
Dielectric	Gas injected foam PE	$\Phi 7.20 \pm 0.10$ mm
Outer conductor (shield 1)	Copper + polyester tape	/
Shield coverage	/	100%
Outer conductor(shield 2)	Plain copper	96 x 0.15 mm
Shield coverage	/	56%
Outer sheath	PVC or LSZH	$\Phi 10.30 \pm 0.18$ mm

### Electrical Mechanical Characteristics

Impedance	50±3 Ohm
Nominal capacitance	80 pF/m
Velocity of propagation	84%
Insulation resistance	>5000 Mohm.Km
Inner conductor resistance	3.2Ohm/Km
Outer conductor resistance	12.7 Ohm/Km
Operating temperature range	-30 °C - +70 °C
Copper weight	71.3 Kg/Km
Cable weight (approx.)	137.7 Kg/Km
Screening effectiveness	>80 dB

### Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)
50	2.5	0.76
100	3.6	1.1
400	7.9	2.41
600	10.1	3.08



# Caledonian

Coaxial Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

860	12.1	3.69
1000	13.2	4.02
1750	18.7	5.7
2400	22.2	6.77

## Return Loss

30-300 MHz	>29dB
300-600 MHz	>26dB
600-900 MHz	>24dB