



Caledonian


Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Semi-rigid Coaxial Cables

SR086-25

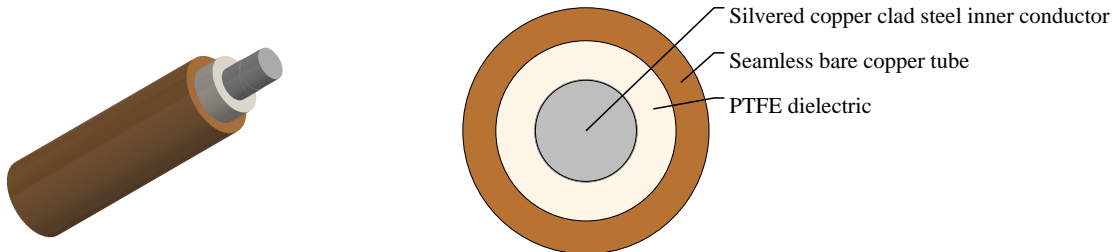

Construction

Inner conductor	Silver plated copper clad steel(SCCS)	Φ0.92 mm
Dielectric	PTFE	Φ1.68 ± 0.1 mm
Outer conductor(type1)	Seamless bare copper tube	Φ2.20 ± 0.1 mm
Outer conductor(type2)	Seamless copper tube, tin plated(TP)	Φ2.20 ± 0.1 mm
Outer conductor(type3)	Seamless copper tube, Silver plated(SP)	Φ2.20 ± 0.1 mm

Electrical Mechanical Characteristics

Impedance	Nom.25 Ohm
Nominal capacitance	189.6 pF/m
Operating temperature range	-55°C - +125 °C
Outer conductor integrity temperature	175°C
Min.bending radius	7.63 mm

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)
500	59	18
1000	84	25.6
5000	197	60
10000	287	87.5
20000	423	128.9