



Caledonian



Fiber Optic Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

CENTRAL LOOSE TUBE RIBBON FIBER CABLE

Armoured Type

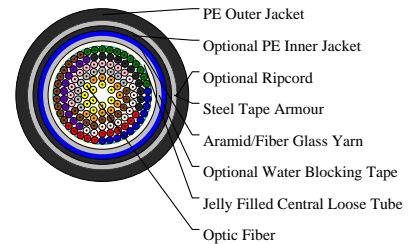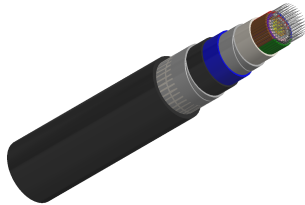

APPLICATIONS

This cable can provide excellent transmission performance and protection of fibers in a variety of field environments. It is usually used in long haul communication system, subscriber network system, distribution, feeder network system and local area network system.

Features:

Large fiber counts with small cable diameter

Highly adaptable to mass splicing

Suitable for installation in pipeline

High quality jelly filled loose tube provides the ribbon fiber satisfactory mechanical and environmental protection

Ripcord allows easy jacket removal

UV or moisture resistant for outdoor application

Dry water blocking core design for ease of handling

PRODUCT DESCRIPTION

Central loose tube cable contains one tube with 12 fiber ribbons, which is filled with water blocking gel. The fiber ribbon can be easily separated by hand tool. Either aramid yarn or fiber glass is wound around the tube to provide physical protection and tensile strength. The cable can be jacketed with either PE, PVC or LSZH though PE is the preferred option for water protection purpose. For direct burial, steel wire armour or corrugated steel tape armour is applied with an optional inner jacket of either PVC or PE. An optional Aluminium moisture tape can be incorporated under the jacket for water blocking and shielding purpose. An optional ripcord can be put under the jacket to facilitate jacket removal.

STANDARDS

IEC60794-1-2

Telcordia GR-20

RUS 7 CFR 1755.900 (REA PE-90)

ICEA S 87-640

MECHANICAL PROPERTIES

Minimum Bending Radius:

Under installation: 20XOD



Caledonian

Fiber Optic Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

During operation: 10×OD for unarmoured cables

20×OD for armoured cables

Temperature Range:

Operating Temperature Range: -40°C(-40°F) to +70°C(+158°F)

Storage Temperature Range: -45°C(-58°F) to +70°C(+158°F)

Maximum Compressive Load:3000N

Repeated Impact: 4.4 N.m (J)

Twist (Torsion): 180X10 times, 125XOD

Cyclic Flexing: 25 cycles for armoured cables;

100 cycles for unarmoured cables.

Crush Resistance: 263N/cm (150lb/in)

DIMENSION AND PARAMETERS

No. of fibres	Approx. Overall Diameter	Cable Weight	Cable Weight	Maximum Pulling Load (Installation)	Maximum Pulling Load (In Service)
	mm	Lbs./Kft	kg/km	N/lb	N/lb
156-216	17.1	212.08	316	2670/600	890/200