





Caledonian

Industrial Cables (Harmonized code)

www.caledonian-cables.com

marketing@caledonian-cables.com

H05GG-F

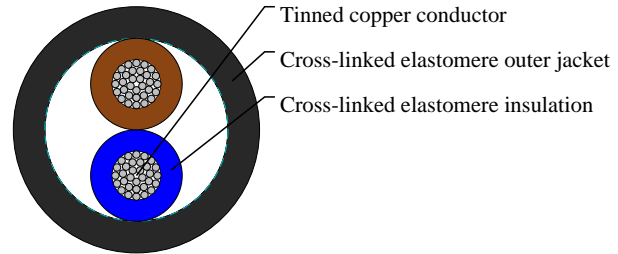

APPLICATIONS

For general use in domestic premises, kitchens and offices and for supplying appliances where the cables are subjected to low mechanical stresses. Also for low temperature uses. (eg., cooking appliances, soldering irons, toasters)

STANDARDS

<HAR> HD 22.11 S1

VDE 0282 part 11

CEI 20-19/11

NFC 32-102-11

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

- Fine tinned copper strands
- Strands to VDE-0295 Class-5, IEC 60228 CI-5
- Cross-linked elastomere E13 insulation
- Color code VDE-0293-308
- Cross-linked elastomere EM 9 outer jacket - black

COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293-308

2 cores - Brown + Blue

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000V
- Flexing bending radius: $4 \times \varnothing$
- Static bending radius: $3 \times \varnothing$
- Temperature range: -15°C to $+110^{\circ}\text{C}$
- Short circuit temperature: 200°C
- Flame retardant: IEC 60332 -1



Caledonian

Industrial Cables (Harmonized code)

www.caledonian-cables.com

marketing@caledonian-cables.com

- Halogen-free: IEC 60754-1
- Low smoke: IEC 60754-2
- Smoke density: IEC 61034

DIMENSION AND PARAMETERS

| No. of Cores × Cross- sectional Area | AWG Size | Nominal Insulation Thickness | Nominal Sheath Thickness | Approx. Overall Diameter | Approx. Weight |
|--|-----------|------------------------------------|-----------------------------|-----------------------------|----------------|
| No. × mm ² | | mm | mm | mm | kg/km |
| 2x1 | 17(32/32) | 0.6 | 0.9 | 6.8 | 64 |