





# Caledonian

Industrial Cables (Harmonized code)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## H05V-K

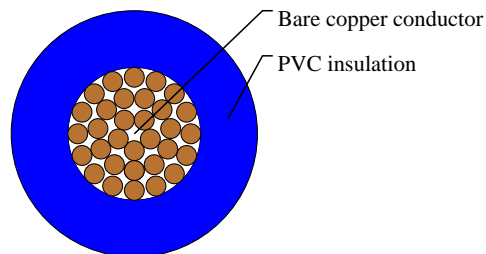

## APPLICATIONS

These insulated wires are determined for installation to the inside of apparatus as well as for the protective laying to the lightings, in dry rooms, in production facilities, switch and distributors boards, in tubes, under and surface mounting of plasters.

## STANDARDS

<HAR> HD 21.3 S3

VDE-0281 Part-3

CEI 20-20

CEI20-52

CE Low Voltage Directive 73/23/EEC and 93/68/EEC

ROHS compliant

## VOLTAGE RATING

300/500V

## CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- Special PVC TI1 core insulation
- Cores to VDE-0293 colors on chart

## COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293-308/HD308/NF C 32-081

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000 volts
- Flexing bending radius:  $12.5 \times \varnothing$
- Static bending radius:  $12.5 \times \varnothing$
- Flexing temperature:  $-5^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$
- Static temperature:  $-30^{\circ}\text{C}$  to  $+80^{\circ}\text{C}$



# Caledonian

Industrial Cables (Harmonized code)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Flame retardant: IEC 60332.1
- Insulation resistance: 10 MΩ x km

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No. × mm <sup>2</sup>		mm	mm	kg/km	kg/km
1 x 1	17(32/32)	0.6	2.6	9.6	15