




Caledonian

Industrial Cables (Harmonized code)

www.caledonian-cables.com

marketing@caledonian-cables.com

H05Z-K

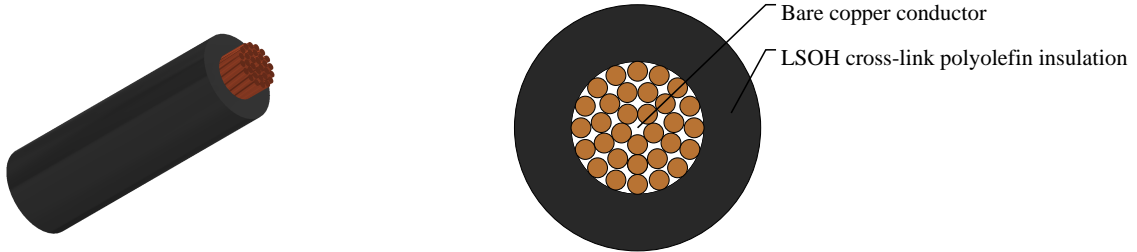

APPLICATIONS

These cables are designed for the internal wiring of switchboards and distributor boards with an alternating nominal voltage up to 1000 Volts or a direct voltage up to 750 volts. Generally install in pipes or ducts and internal wiring of appliances with maximum operating temperature of 90° C, and generally in areas (such as public and government buildings) where smoke and toxic fumes may cause a threat to life and equipment. The cables produce no corrosive gasses when burnt which is particularly important where electronic equipment is installed.

STANDARDS

<HAR> HD 22.9 S2

VDE-0282 Part-9

BS 7211

IEC 60754-2

EN 50267

VDE 0482-267

CE Low Voltage Directive 73/23/EEC and 93/68/EEC

ROHS compliant

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5 BS 6360 cl. 5, HD 383
- Cross-link polyolefin EI5 core insulation
- LSOH - low smoke, zero halogen

COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293-308/HD308/NF C 32-081

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

PHYSICAL AND THERMAL PROPERTIES



Caledonian

Industrial Cables (Harmonized code)

www.caledonian-cables.com

marketing@caledonian-cables.com

- Test voltage: 2500 volts
- Flexing bending radius: $8 \times \varnothing$
- Static bending radius: $8 \times \varnothing$
- Flexing temperature: -15°C to $+90^{\circ} \text{C}$
- Static temperature: -40°C to $+90^{\circ} \text{C}$
- Flame retardant: IEC 60332.1
- Insulation resistance: $10 \text{ M}\Omega \times \text{km}$
- Smoke density acc. to EN 50268 / IEC 61034
- Corrosiveness of combustion gases acc. to EN 50267-2-2, IEC 60754-2
- Flame test: flame-retardant acc. to EN 50265-2-1, IEC 60332.1

DIMENSION AND PARAMETERS

| No. of Cores × Cross-sectional Area | AWG Size | Nominal Insulation Thickness | Approx. Overall Diameter | Nominal Copper Weight | Approx. Weight |
|--|-----------|------------------------------|--------------------------|-----------------------|----------------|
| No. × mm ² | | mm | mm | kg/km | kg/km |
| 1 x 1 | 17(32/32) | 0.6 | 2.6 | 9.6 | 15 |