




Caledonian

Industrial Cables (Harmonized code)

www.caledonian-cables.com

marketing@caledonian-cables.com

H07BN4-F WIND90

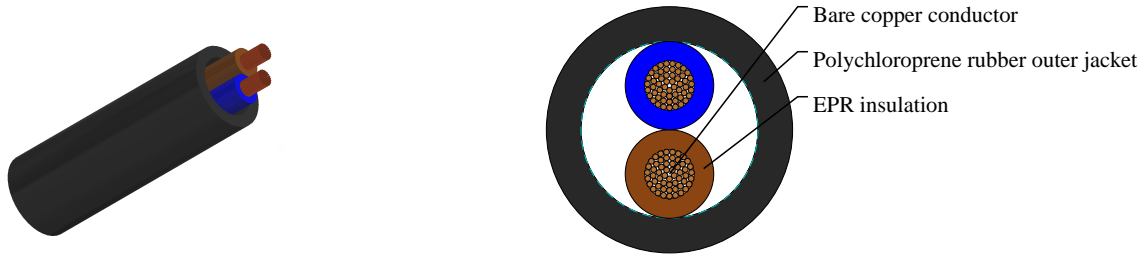

APPLICATIONS

These cables are made with synthetic rubbers having an excellent temperature resistance and can be used either in dry, humid or wet places or in contact with oil or grease, in weather conditions and under medium mechanical stress, for example power supply to equipment in industrial plants, large size boilers, heating plates, portable lamps, electrical tools such as drilling machines, disk saws, portable engines and machines, building and farming equipments etc. These cables are also suitable for stationary equipments, for example designed for wind-tower application, the particular conductor Cable Construction and the used materials have improved the cable torsion resistance (max 150°/m), key requirement for drop cables in windgenerators,

on plaster in temporary buildings and builders huts, and wiring in machinery elevators or similar.

Suitable for caravans and camping equipment. Especially recommended for service temperature up to 90° C together with good resistance to hot grease and oil. Therefore these cables are ideal for use in plants and industries dealing with grease, oil or oil emulsion treatments, transformation or handling.

STANDARDS

<HAR> VDE-0282 Part-12

CENELEC HD 22.12 S1

CEI 20-19 p.12

CEI 20-35 (EN 60332-1)

HAR IEC 60245-4

IEC 60754-1/2

ROHS compliant

VOLTAGE RATING

450/750V

CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- EPR(Ethylene Propylene Rubber) rubber E17 insulation
- Color code VDE-0293-308
- Special polychloroprene rubber outer jacket EM7



Caledonian

Industrial Cables (Harmonized code)

www.caledonian-cables.com

marketing@caledonian-cables.com

COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293-308/HD308/NF C 32-081

2 cores - Brown + Blue

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2500 volts
- Flexing bending radius: $6.0 \times \varnothing$
- Fixed bending radius: $4.0 \times \varnothing$
- Temperature Range: -40°C to $+90^{\circ} \text{C}$
- Wind energy: -15°C to $+90^{\circ} \text{C}$
- Maximum Short Circuit Temperature: $+250^{\circ} \text{C}$
- Flame retardant: IEC 60332.1C2/NF C 32-070
- Insulation resistance: $20 \text{ M}\Omega \times \text{km}$

DIMENSION AND PARAMETERS

| No. of Cores × Cross- sectional Area | AWG Size | Nominal Insulation Thickness | Nominal Sheath Thickness | Approx. Overall Diameter | Approx. Weight |
|--------------------------------------------|-----------|------------------------------------|-----------------------------|-----------------------------|----------------|
| No. × mm ² | | mm | mm | mm | kg/km |
| 2 x 4 | 12(56/28) | 1 | 1.8 | 12.6 | 238 |