





# Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

## 2491X HR to BS 6004(New BS EN 50525-2-31)

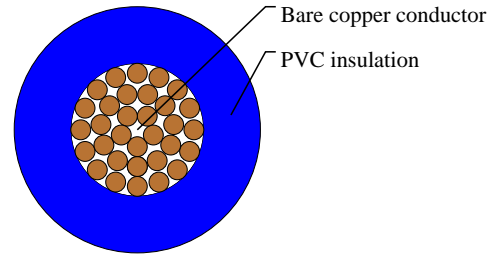

### APPLICATIONS

These special heat-resistant flexible single-conductor hook-up wires are ideal for use in power current installation, switch cabinets, motors and transformers which are subject to direct contact with high temperature equipments(e.g. varnishing machines and drying towers etc.). These are also suitable for inside wiring of electrical equipments such as lighting and heating apparatus. 2491X HR is equivalent to harmonized code H05V2-K.

### VOLTAGE RATING

300/500V

### CABLE CONSTRUCTION

- Fine bare copper strands
- Stranding to BS 6360 CL-5 or IEC 60228 CL-5
- Special heat resistant PVC TI3 core insulation to BS 7655

### COLOUR CODE

Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

### PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000/2500 volts
- Flexing bending radius: 10-15xOverall diameter
- Static bending radius: 10-15xOverall diameter
- Flexing temperature: +5° C to +90° C
- Static temperature: -10° C to +105° C
- Short circuit temperature: +160° C
- Flame retardant: IEC 60332.1
- Insulation resistance: 20 MΩxkm

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	AWG Size	Nominal Insulation Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No.×mm <sup>2</sup>		mm	mm	kg/km	kg/km



# Caledonian

Industrial Cables to British Standard

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

1x1	17(32/32)	0.6	2.6	9.6	15
-----	-----------	-----	-----	-----	----