





Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

6491X to BS 6004(New BS EN 50525-2-31)

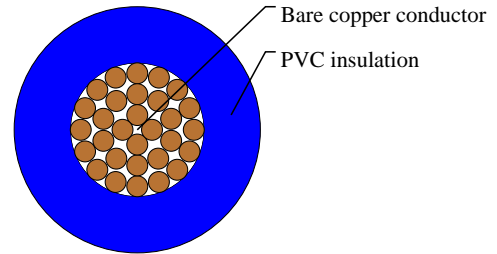

APPLICATIONS

These cables are designed for use as fixed wiring in domestic, Industrial power and lighting applications such as light fittings, appliances, switchgear and control gear, they can be used in conduit or trunking or surface mounted when used as an earth. 6491X is equivalent to H07V-K. The heatresistant version is ideal for use in installation which are subject to direct contact with high temperature equipments (e.g. varnishing machines and drying towers etc.).

VOLTAGE RATING

450/750V

CABLE CONSTRUCTION

- Bare copper made of solid/strands conductor
- Stranding to BS 6360 CL-5 or IEC 60228 CL-5(H07V-K)
- Special PVC T11 core insulation

COLOUR CODE

Green/Yellow, Black, Blue, Brown, Red, White, Grey, Violet

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2500 volts
- Minimum bending radius:
 - Up to 10mm²: 3xoverall diameter
 - 10mm² to 25mm²: 4xoverall diameter
 - Above 25mm²: 5xoverall diameter
- Operating temperature: 0° C to +70° C
- Short circuit temperature: +160° C
- Flame retardant: IEC 60332.1
- Insulation resistance: 10 MΩxkm

DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
--------------------------------------------	----------	------------------------------------	-----------------------------	--------------------------	----------------



Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

No. x mm ²		mm	mm	kg/km	kg/km
1x1.5	16(30/30)	0.7	3.1	14.4	20