





# Caledonian

JIS Code Power & Control Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## VVR 3C10

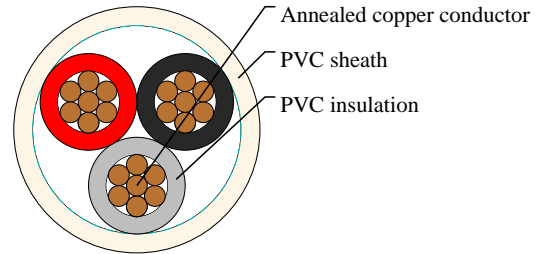

### APPLICATIONS

Exposed wiring in air or use in raceway wet or dry location, direct burial in ground.

### STANDARDS

TIS 11-2531

### CABLE CONSTRUCTION

Conductor: Stranded annealed copper

Insulation: Polyvinyl chloride (PVC)

3 cores – Light gray, Black and Red

Sheath: Polyvinyl chloride (PVC), white color

### PHYSICAL AND THERMAL PROPERTIES

Maximum conductor temperature 70°C

Circuit voltage not exceeding 300 volts

Test voltage 2000 volts

### DIMENSION AND PARAMETERS

No. of Cores	Conductor Size	No. and Dia. of Wires	Nominal Insulation Thickness	Nominal Sheath Thickness	Overall Diameter (max.)	Approx. Weight	Min. Insulation Resistance at 70 °C	Current rating in the air
	mm <sup>2</sup>	no./mm	mm	mm	mm	kg/km	Ohm/km	A
3	10	7/1.35	0.9	1.2	17	490	0.0059	50