



# Caledonian


JIS Industrial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## JIS C 3605 Cables

EE/F(EM-EE) CE/F(EM-CE) 4C250

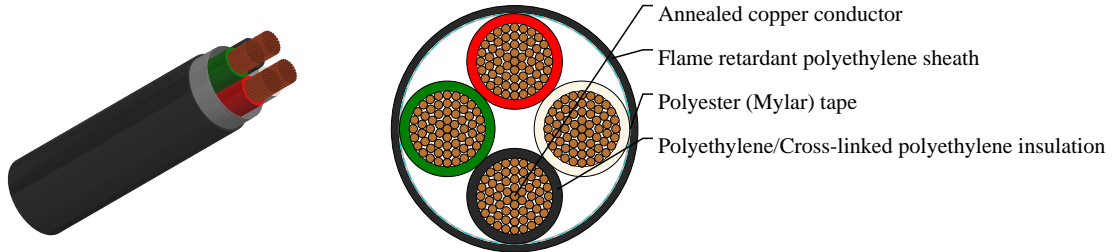

## APPLICATIONS

For general purpose power distribution in wet or dry locations, installed in air, in conduit or duct, or directly buried.

## CABLE CONSTRUCTION

Conductor: Circular, circular or segmental compacted stranded annealed copper wires

Separator: A proper separator may be applied to a conductor

Insulation: Polyethylene/Cross-linked polyethylene

Filler: Non-hygroscopic material(optional)

Binding tape: Polyester (Mylar) tape (optional)

Sheath: Flame retardant polyethylene, Black color

Name Code:

E: Polyethylene C: Cross-linked polyethylene /F: Flame retardant polyethylene

## COLOUR CODE

4 cores- Black, white, red and green

## PHYSICAL AND THERMAL PROPERTIES

Maximum conductor temperature 90°C

Circuit voltage not exceeding 600 volts

Test voltage 3000 volts

## DIMENSION AND PARAMETERS

No. of Cores	Nominal Cross-sectional Area	No. and Dia. of Wires	Conductor Diameter	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Weight	Max. DC Resistance at 20°C
	mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	Ω/km
4	250	61/2.3	20.7	2.5	1.8	70	11600	0.0736