




Caledonian

BS 6883&BS 7917 Caledonian Offshore & Marine Cables LV Flame Retardant Power & Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

0.6/1kV HF-EPR Insulated, SW2/SW4 Sheathed Armoured Flame Retardant Power & Control Cables 1C50.0

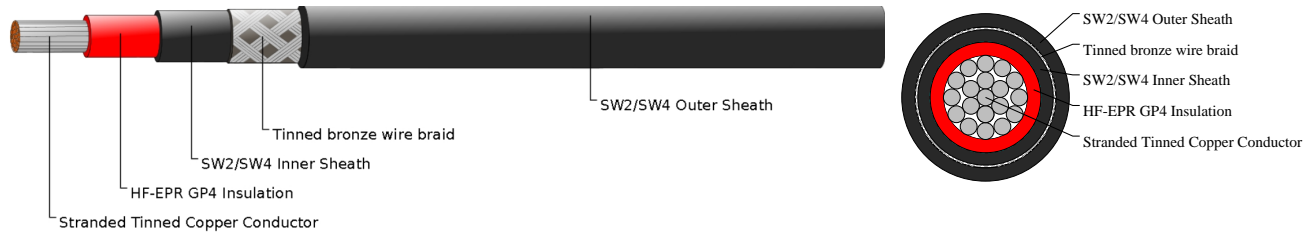

APPLICATIONS

These elastomeric insulated cables are designed for fixed wiring in ships and on mobile offshore units, suitable for use in power and control applications.

STANDARDS

BS 6883

IEC 60332-3A Flame retardant

IEC 60754-1; IEC 60754-2 Corrosivity

IEC 61034-2 Smoke density

Cold bend and impact (-40°C) (on request)

CSA C22.2 No. 38-95 (on request)

VOLTAGE RATING

0.6/1kV

CABLE CONSTRUCTION

Conductor: Tinned copper wire stranded circular cl. 2 BS 6360/IEC 60228.

Insulation: HF-EPR GP4 according to BS 7655 1.2.

Inner Sheath: Halogen free thermosetting compound SW4 according to BS 7655 2.6 or reduced halogen thermosetting compound SW2 according to BS 7655 2.6.

Armour: Tinned bronze wire braid (single core). Copper wire braid can be offered upon request.

Outer Sheath: Halogen free thermosetting compound SW4 according to BS 7655 2.6 or reduced halogen thermosetting compound SW2 according to BS 7655 2.6.

PHYSICAL AND THERMAL PROPERTIES

Temperature Range: -40°C ~ +90°C

MECHANICAL PROPERTIES

Minimum Internal Bending Radius: 6×OD (OD>25mm); 4×OD (OD ≤25mm)

DIMENSION AND PARAMETERS

| No. of Cores × Cross- | Nominal Insulation Thickness | Nominal Inner | Diameter Over Inner | Diameter Over Inner | Nominal Armour | Nominal Outer | Overall Diameter (min.) | Overall Diameter (max.) | Approx. Weight |
|-----------------------|------------------------------|---------------|---------------------|---------------------|----------------|---------------|-------------------------|-------------------------|----------------|
|-----------------------|------------------------------|---------------|---------------------|---------------------|----------------|---------------|-------------------------|-------------------------|----------------|



Caledonian

BS 6883&BS 7917 Caledonian Offshore & Marine Cables LV Flame
Retardant Power & Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

| sectional Area | | Sheath Thickness | Sheath (min.) | Sheath (max.) | Wire Diameter | Sheath Thickness | | | |
|-----------------------|-----|---------------------|------------------|------------------|------------------|---------------------|------|------|-------|
| No. x mm ² | mm | mm | mm | mm | mm | mm | mm | mm | kg/km |
| 1x50 | 1.4 | 1.3 | 13.7 | 15.5 | 0.3 | 1.4 | 17.9 | 20.2 | 870 |