




Caledonian

BS 6883&BS 7917 Caledonian Offshore & Marine Cables LV Flame Retardant Power & Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

0.6/1kV HF-EPR Insulated, SW2/SW4 Sheathed Armoured Flame Retardant Power & Control Cables 5C2.5

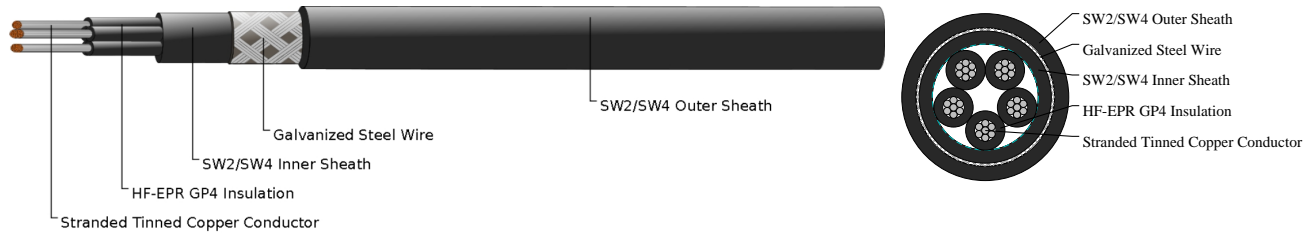

APPLICATIONS

These elastomeric insulated cables are designed for fixed wiring in ships and on mobile offshore units, suitable for use in power and control applications.

STANDARDS

- BS 6883
- IEC 60332-3A Flame retardant
- IEC 60754-1; IEC 60754-2 Corrosivity
- IEC 61034-2 Smoke density
- Cold bend and impact (-40°C) (on request)
- CSA C22.2 No. 38-95 (on request)

VOLTAGE RATING

0.6/1kV

CABLE CONSTRUCTION

- Conductor: Tinned copper wire stranded circular cl. 2 BS 6360/IEC 60228.
- Insulation: HF-EPR GP4 according to BS 7655 1.2.
- Inner Sheath: Halogen free thermosetting compound SW4 according to BS 7655 2.6 or reduced halogen thermosetting compound SW2 according to BS 7655 2.6.
- Armour: Galvanized steel wire braid. Copper wire braid can be offered upon request.
- Outer Sheath: Halogen free thermosetting compound SW4 according to BS 7655 2.6 or reduced halogen thermosetting compound SW2 according to BS 7655 2.6.

PHYSICAL AND THERMAL PROPERTIES

Temperature Range: -40°C ~ +90°C

MECHANICAL PROPERTIES

Minimum Internal Bending Radius: 6×OD (OD>25mm); 4×OD (OD ≤25mm)

DIMENSION AND PARAMETERS

No. of Cores × Cross-	Nominal Insulation Thickness	Nominal Inner	Diameter Over Inner	Diameter Over Inner	Nominal Armour	Nominal Outer	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
-----------------------	------------------------------	---------------	---------------------	---------------------	----------------	---------------	-------------------------	-------------------------	----------------



Caledonian

BS 6883&BS 7917 Caledonian Offshore & Marine Cables LV Flame Retardant Power & Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

sectional Area		Sheath Thickness	Sheath (min.)	Sheath (max.)	Wire Diameter	Sheath Thickness			
No. xmm ²	mm	mm	mm	mm	mm	mm	mm	mm	kg/km
5x2.5	0.8	1.2	11.7	13.3	0.3	1.3	15.6	17.8	480