





Caledonian

BS 6883&BS 7917 Caledonian Offshore & Marine Cables Fire Resistant
Instrumentation & Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

150/250V HF-EPR Insulated, SW2/SW4 Sheathed, Collectively Screened Unarmoured Fire Resistant
Instrumentation & Control Cables 7T0.75

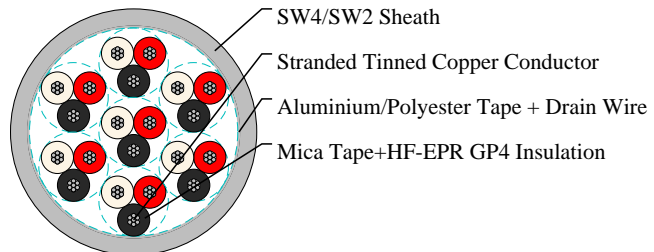

APPLICATIONS

These fire resistant elastomeric insulated cables are designed for fixed wiring in ships and on mobile offshore units, suitable for use in instrumentation, lighting and control circuits where fire integrity is essential.

STANDARDS

BS 7917

IEC 60331-31 Fire resistant

IEC 60332-3A Flame retardant

IEC 60754-1; IEC 60754-2 Corrosivity

IEC 61034-2 Smoke density

Cold bend and impact (-40°C) (on request)

CSA C22.2 No. 38-95 (on request)

VOLTAGE RATING

150/250V

CABLE CONSTRUCTION

Conductor: Tinned copper wire stranded circular cl. 2 BS 6360/IEC 60228.

Insulation: Mica tape + HF-EPR GP4 according to BS 7655 1.2.

Lay-up: Pairs, triples, quads.

Collective Screen: Aluminium/polyester tape + drain wire tinned copper.

Sheath: Halogen free thermosetting compound SW4 according to BS 7655 2.6 or reduced halogen thermosetting compound SW2 according to BS 7655 2.6.

PHYSICAL AND THERMAL PROPERTIES

Temperature Range: -40°C ~ +90°C

MECHANICAL PROPERTIES

Minimum Internal Bending Radius: 8×OD

DIMENSION AND PARAMETERS



Caledonian

BS 6883&BS 7917 Caledonian Offshore & Marine Cables Fire Resistant
Instrumentation & Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

No. of Cores × Cross- sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
No.×mm ²	mm	mm	mm	mm	kg/km
7x3x0.75	0.8	1.4	20.5	23.0	457