




Caledonian

Military Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

M81381/20 1C20AWG

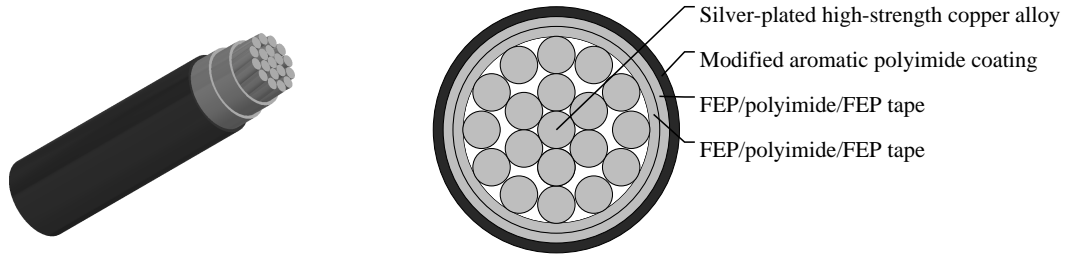

APPLICATIONS

These FEP/polyimide/FEP tape insulated single-core M81381/20 cables are used in aerospace applications and other challenging applications. It is well-suited to applications concerned with smoke emission and verload stability.

VOLTAGE RATING

600V

CABLE CONSTRUCTION

Conductor: Stranded silver-plated high-strength copper alloy conductor

Insulation: FEP/polyimide/FEP tape insulation

Insulation Wall Thickness: 0.0065"

Jacket: modified aromatic polyimide coating

COLOUR CODE

MIL-STD-104 (See page 42)

10 basic colors(BLK,BRN,RED,ORN,YEL,GRN,BLU,VIO,GRY,WHT)

PHYSICAL AND THERMAL PROPERTIES

Temperature Range: -55°C to +200°C

DIMENSION AND PARAMETERS

| AWG Size | Conductor Stranding | Diameter of Conductor (min.) | Diameter of Conductor (min.) | Diameter of Conductor (max.) | Diameter of Conductor (max.) | Overall Diameter (min.) | Overall Diameter (min.) | Overall Diameter (max.) | Overall Diameter (max.) | Approx. Weight | Max. Resistance at 20°C |
|----------|---------------------|------------------------------|------------------------------|------------------------------|------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|----------------|-------------------------|
| | | in | mm | in | mm | in | mm | in | mm | LBS/MFT | OHMS/MFT |
| 20 | 19/32 | 0.037 | 0.94 | 0.04 | 1.02 | 0.047 | 1.194 | 0.05 | 1.27 | 4.1 | 11.4 |