




# Caledonian

Military Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## STJ(SEX) Cables – PTFE(FEP) Tape Jacket Over Shield 2C16AWG

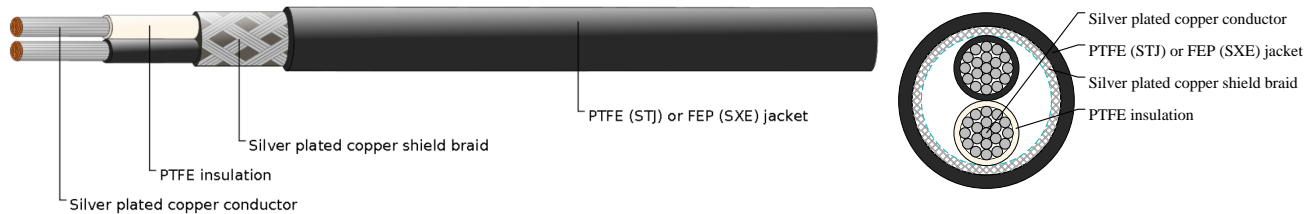

### APPLICATIONS

These PTFE insulated MIL-W-16878D shielded PTFE cables are used in electronic equipment. These cables are resistant to acids, alkalis, oil, flame, moisture, solvents and fungus.

### VOLTAGE RATING

600V

### CABLE CONSTRUCTION

Conductor: stranded silver plated copper (also available nickel plated copper)

Insulation: Type E extruded PTFE

Insulation Wall Thickness: 0.006"

Shield: Braided silver plated copper shield (85% Coverage)

Jacket: Tape wrapped PTFE (STJ) or Extruded FEP (SXE) Jacket (White preferred)

### COLOUR CODE

Standard Color Code: 1: White; 2: Black; 3: Red; 4: Green; 5: Yellow; 6: Blue

### PHYSICAL AND THERMAL PROPERTIES

Temperature Range: -65°C to +200°C

(Nickel-plated conductors PTFE jacket: 260°C)

(Nickel-plated conductors FEP jacket: 200°C)

### DIMENSION AND PARAMETERS

No. of Conductor	AWG Size	Conductor Stranding	Shield Diameter	Shield Diameter	Approx. Overall Diameter	Approx. Overall Diameter	Approx. Weight
			in	mm	in	mm	LBS/MFT
2	16	19/29	0.177	4.496	0.192	4.877	33