



Caledonian


Mining Cables (VDE Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

Cables for Underground Mining

NSGAFOEU/NSHXAFOE Medium Voltage Single Core Cables 1C300

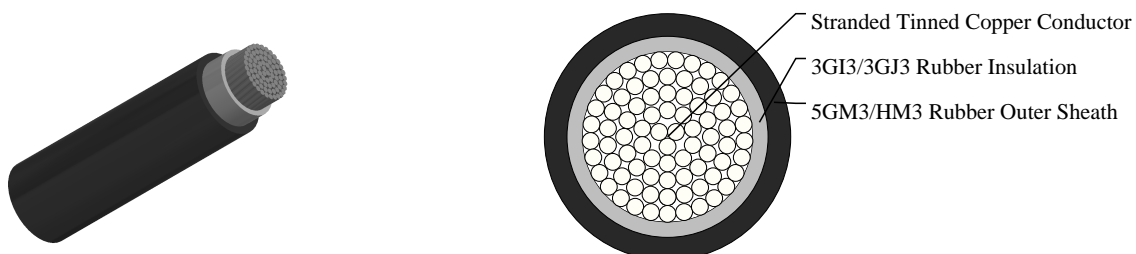

APPLICATIONS

These cables are designed for fixed installation in track-bound vehicles and buses, in pipes and closed installation ducts, as well as for the connection of mobile parts. 3 kV-rated cables can be used in low-voltage switch boards to ensure inherently short-circuit and earth-fault proof connections.

STANDARDS

DIN VDE 0250 Part 602 (for NSGAFOEU/NSGAFCMOEU)

DIN VDE 0250 Part 606 (for halogen free version NSHXAFOE/NSHXAFCMOE)

VOLTAGE RATING

1.8/3kV

CABLE CONSTRUCTION

Conductors: Stranded tinned copper conductor, class 5 according to DIN VDE 0295/IEC 60228.

Insulation: EPR compound type 3GI3/3GJ3.

Outer Sheath: Chlorinated rubber type 5GM3, oil resistant and flame retardant (for NSGAFOEU/NSGAFCMOEU).

Halogen-free polymer compound HM3, oil-resistant, flame retardant, low smoke (for NSHXAFOE/NSHXAFOE).

DIMENSION AND PARAMETERS

| No. of Cores × Cross-sectional Area | Overall Diameter (min.) | Overall Diameter (max.) | Approx. Weight |
|--|-------------------------|-------------------------|----------------|
| No.×mm ² | mm | mm | kg/km |
| 1×300 | 30.8 | 38 | 3000 |