



# Caledonian



Mining Cables (AS\_NZS Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

## AS/NZS 2802:2000 Reeling & Trailing Cables

Type 412 Class2 1.1KV 3C240

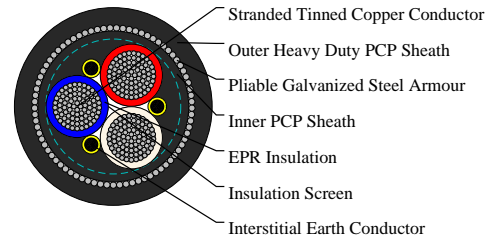

### APPLICATIONS

These cables with green/yellow earths and pliable armour for mechanical protection may be used in applications where damage is likely and armour can reduce cases of costly downtime, suitable installed as feeder cables in sand mining operations.

### STANDARDS

AS/NZS 2802:2000

AS/NZS 1125

AS/NZS 3808

AS/NZS 5000.1

### CABLE CONSTRUCTION

3×Conductors: Flexible stranded tinned annealed copper conductor.

Insulation: EPR.

Insulation Screen: Semiconductive elastomer.

Filler: Elastomer centre filler.

3×Interstitial Earth Conductor: EPR covered flexible stranded tinned copper conductor.

Inner Sheath: PCP sheath. CPE/CSP sheath can be offered upon request.

Pliable Armour: Galvanized low carbon (mild) steel strands.

Outer Sheath: Heavy duty PCP sheath. Heavy duty CPE/CSP sheath can be offered upon request.

### COLOUR CODE

Rotational sequence of core colours: Red, Green/Yellow, White, Green/Yellow, Blue, Green/Yellow

### DIMENSION AND PARAMETERS

Nominal Cross-sectional Area	No./ Nominal Diameter of Strands	Earth Conductor Strand Size	Earth Conductor Thickness of Covering	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Pliable Armour Size	Nom. Overall Diameter	Approx. Weight
mm <sup>2</sup>	no./mm	no./mm	mm	mm	mm	mm	no./mm	mm	kg/km



# Caledonian

Mining Cables (AS\_NZS Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

240	672/0.67	119/0.67	1.2	2.8	3.5	7.5	7/0.9	88.7	1670
-----	----------	----------	-----	-----	-----	-----	-------	------	------