



# Caledonian



Mining Cables (AS\_NZS Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## AS/NZS 2802:2000 Reeling & Trailing Cables

Type 441 Class2 1.1KV 3C50

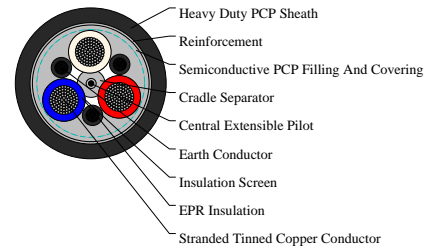

## APPLICATIONS

These Class 2 cables are designed for many uses, suitable for trailing and also suitable for reeling applications, have one central pilot and a semiconductive cradle supporting and protecting the power cores, which makes these cables less likely to be damaged from crushing and squashing.

## STANDARDS

AS/NZS 2802:2000

AS/NZS 1125

AS/NZS 3808

AS/NZS 5000.1

## CABLE CONSTRUCTION

3×Conductors: Flexible stranded tinned annealed copper conductor.

Insulation: EPR.

Insulation Screen: Semiconductive elastomer.

Cradle Separator: Semiconductive PCP.

Overall Core Screen: Semiconductive PCP filling and covering.

3×Interstitial Earth Conductor: Semiconductive PCP covered flexible stranded tinned copper conductor.

1×Central Extensible Pilot: EPR covered flexible stranded tinned copper conductor.

Textile Reinforcement: Open-weave braid reinforcement.

Sheath: Heavy duty PCP sheath. Heavy duty CPE/CSP sheath can be offered upon request.

## COLOUR CODE

Rotational sequence of core colours: Red, Black, White, Black, Blue, Black. The central pilot core is grey.

## DIMENSION AND PARAMETERS

Nominal Cross-sectional Area	No./ Nominal Diameter of Strands	Earth Conductor Strand Size	Earth Conductor Thickness of Covering	Pilot Conductor Strand Size	Pilot Conductor Thickness of Covering	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
mm <sup>2</sup>	no./mm	no./mm	mm	no./mm	mm	mm	mm	mm	kg/km



# Caledonian

Mining Cables (AS\_NZS Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

50	380/0.4	120/0.3	1	40/0.2	0.8	1.7	4.9	45.9	349
----	---------	---------	---	--------	-----	-----	-----	------	-----