



Caledonian



Mining Cables (AS_NZS Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

AS/NZS 2802:2000 Reeling & Trailing Cables

Type 450 Class1 3.3KV 3C16

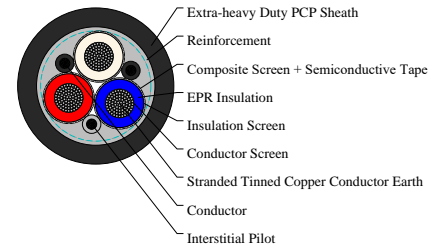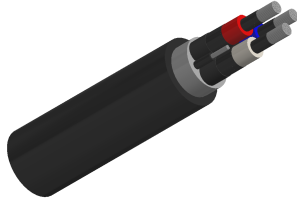

APPLICATIONS

These cables are suitable for supply of power to a wide range of applications, from dragline cable to slow reeling applications, where copper screened cable is required but light weight and smaller dimensions are also desired.

STANDARDS

AS/NZS 2802:2000

AS/NZS 1125

AS/NZS 3808

AS/NZS 5000.1

CABLE CONSTRUCTION

3×Conductors: Flexible stranded tinned annealed copper conductor.

Conductor Screen: Semiconductive compound.

Insulation: EPR.

Insulation Screen: Semiconductive elastomer.

Composite Screen: Tinned annealed copper braiding interwove with polyester yarn, covered with semiconductive tape.

Filler: Elastomer centre filler.

2×Interstitial Earth Conductor: CSP covered flexible stranded tinned copper conductor.

1×Interstitial Pilot: EPR covered flexible stranded tinned copper conductor.

Textile Reinforcement: Open-weave braid reinforcement.

Sheath: Extra-heavy duty PCP sheath. Extra-heavy duty CPE/CSP sheath can be offered upon request.

COLOUR CODE

Rotational sequence of core colours: Red, Black, White, Black, Blue, Grey

DIMENSION AND PARAMETERS

Nominal Cross-sectional Area	No./ Nominal Diameter of Strands	Core Screen Strand Size	Core Screen Area of Screen	Pilot/ Earth Conductor Strand Size	Pilot/ Earth Conductor Thickness	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
------------------------------	----------------------------------	-------------------------	----------------------------	------------------------------------	----------------------------------	------------------------------	--------------------------	-----------------------	----------------



Caledonian

Mining Cables (AS_NZS Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

					of Covering				
mm ²	no./mm	no./mm	mm ²	no./mm	mm	mm	mm	mm	kg/km
16	126/0.4	128/0.25	6.3	120/0.3	1.4	2.2	4.5	42.8	266