



# Caledonian



Mining Cables (AS\_NZS Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

## AS/NZS 1972:2006 Cables

XLPE Insulated 6.35/11KV 3C120

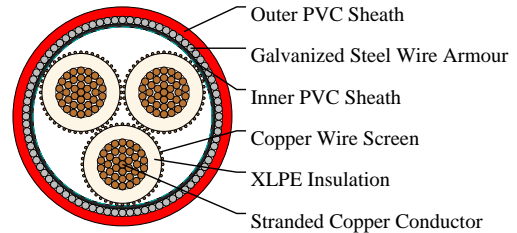

## APPLICATIONS

These cables are used as HV feeder cables in fixed conditions.

## STANDARDS

AS/NZS 1972:2006

AS/NZS 1125

AS/NZS 3808

## CABLE CONSTRUCTION

Conductors: Stranded plain copper conductor.

Insulation: XLPE.

Individual Screen (earth conductor): Copper wire.

Inner Sheath: PVC sheath.

Armour: Galvanized steel wire armour.

Outer Sheath: PVC sheath to AS/NZS 1429.1.

## DIMENSION AND PARAMETERS

No. of Cores	Nominal Cross-sectional Area	Conductor Diameter	Core Screen Strand Size	Core Screen Area of Screen	Nominal Insulation Thickness	Nominal Sheath Thickness	Nominal Armour Wire Diameter	Nom. Overall Diameter	Approx. Weight
	mm <sup>2</sup>	mm	no./mm	mm <sup>2</sup>	mm	mm	mm	mm	kg/km
3	120	13.1	36/0.85	20.4	3.4	3.1	2.5	67.9	905