




# Caledonian

Motor Connecting Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## 9YSLCY-JB 4G120

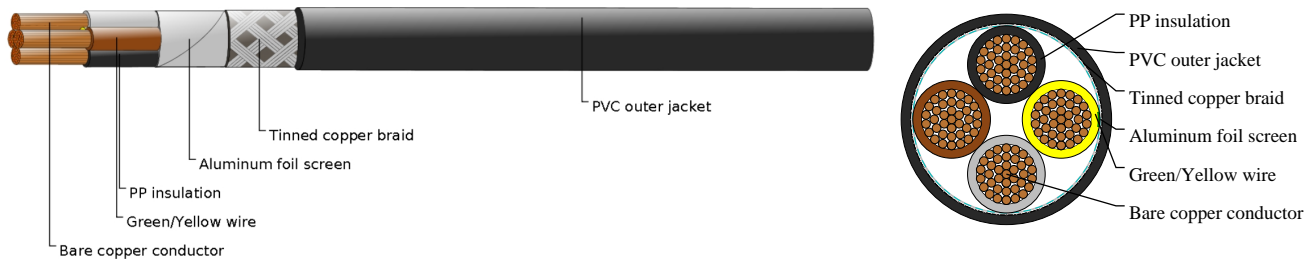

## APPLICATIONS

These cables are double shielded, large gauge size, UL/CSA/CE approved PVC motor supply cable. Polypropylene insulation over very fine stranded copper provides a low-loss transfer of power, excellent low capacitance performance and superior flexibility when compared to conventional PVC cables. The applications include frequency converters, motor runs, connections with high electromagnetic interference. Found in the automotive, paper and food industry, environmental technology, packaging industry, machine tools and handling equipment. The overall foil and braid shield offer excellent protection against electromagnetic and electrical interferences. For medium mechanical stresses found indoors in dry, moist and wet areas.

## STANDARDS

UL AWM 2570 or 20886, VW-1  
CSA AWM I/II A/B, FT-1  
UL/CSA rated 1kV 80 Deg C  
VDE 0250, VDE 0207, VDE 0276  
EMC to EN 55011, EMC to VDE-0875 part-11

## VOLTAGE RATING

IEC 600/1000V / UL & CSA 1000V

## CABLE CONSTRUCTION

- Stranded bare copper conductor according to DIN VDE 0295, IEC60228 cl. 5
- Polypropylene (PP) insulation
- Colours according to HD 308 S2(VDE 0293- 308)
- Special aluminum foil screening
- Tinned copper braiding, coverage approx. 85%
- Transparent PVC sheath made of PVC compound YM2 acc. VDE 0207 -5, leadfree, flame retardant & selfextinguishing

## COLOUR CODE

Insulation Colour Code  
Colours according to HD 308 S2(VDE 0293- 308)  
4 cores (G) - Green-Yellow + Brown + Black + Grey

## PHYSICAL AND THERMAL PROPERTIES



# Caledonian

Motor Connecting Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Working voltage: IEC 600/1000V / UL & CSA 1000V
- Test voltage: 4000 volts
- Minimum bending radius: 15 x Ø
- Flexing temperature: -5° C to +80° C
- Fixed installation temperature: - 40° C to +80° C
- Flame retardant: IEC 60332.1 VW-1
- Insulation resistance: >20 GΩ x km

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	AWG Size	Nom. Overall Diameter	Nominal Copper Weight	Approx. Weight
No. × mm <sup>2</sup>		mm	kg/km	kg/km
4G120	4/0(614/24)	49.8	5108	6600