





## Caledonian

NEK606 Caledonian Offshore & Marine Cables Fire Resistant Instrumentation Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

### S108 (Formerly S14) BU(c) 250 V

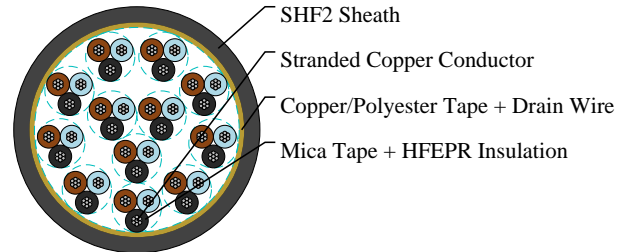

### APPLICATIONS

These unarmoured cables are fire resistant, flame retardant, low smoke and halogen free, used for instrumentation, communication, control and alarm systems.

### STANDARDS

IEC 60092-376  
IEC 60092-360  
IEC 60332-1  
IEC 60332-3-22  
IEC 60754-1,2  
IEC 61034-1,2  
NEK 606:2016  
IEC 60331-21

### VOLTAGE RATING

250V

### CABLE CONSTRUCTION

Conductors: Circular tinned annealed stranded copper wire to IEC 60228 class 2 or class 5.

Insulation: Mica tape + Halogen free EPR compound.

Twinning: Colour coded cores twisted together.

Collective Shielding: Pairs/triples are layed up and collectively screened by copper backed polyester tape in contact with a stranded tinned copper drain wire. Pairs/triples are numbered with numbered tape or by numbers printed directly on the insulated conductors.

Outer Sheath: Halogen free thermosetting compound, SHF2, coloured grey (blue for intrinsically safe).

### MECHANICAL PROPERTIES

Bending Radius: 8×OD (during installation); 6×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

### TECHNICAL CHARACTERISTICS



## Caledonian

### NEK606 Caledonian Offshore & Marine Cables Fire Resistant Instrumentation Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

| Nom. Cross-Section Area | Nom. Conductor Diameter | Maximum Resistance @20°C | Mutual Capacitance | Nominal Inductance @ 1KHz | Maximum L/R @ 1KHz |
|-------------------------|-------------------------|--------------------------|--------------------|---------------------------|--------------------|
| mm <sup>2</sup>         | mm                      | Ohm/km                   | nF/km              | MH/km                     | μH/Ω               |
| 0.75                    | 1.1                     | 26.3                     | 75                 | 0.727                     | 20                 |

#### DIMENSION AND PARAMETERS

| Construction No. of elements×No. of cores in element×Cross section | Nominal Insulation Thickness | Nominal Sheath Thickness | Approx. Overall Diameter | Approx. Weight |
|--|------------------------------|--------------------------|--------------------------|----------------|
| mm <sup>2</sup>  | mm                           | mm                       | mm                       | kg/km          |
| 12×3×0.75  | 0.6                          | 1.6                      | 22.9                     | 745            |