




Caledonian

NEK606 Caledonian Offshore & Marine Cables Fire Resistant Medium Voltage Power Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

P106 (Formerly P6 or P6/P13) BFOU 3.6/6kV

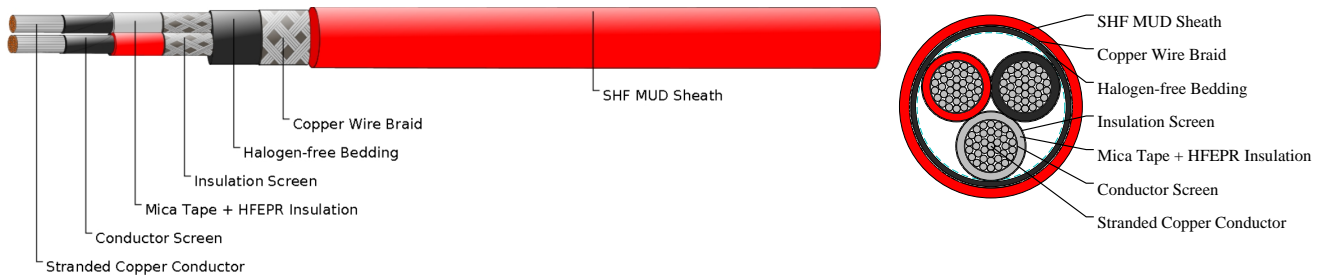

APPLICATIONS

These cables are fire resistant, flame retardant, low smoke, halogen free and mud resistant, used for fixed installation for medium voltage power.

STANDARDS

IEC 60092-354
IEC 60092-351
IEC 60092-359
IEC 60332-1
IEC 60332-3-22
IEC 60754-1,2
IEC 61034-1,2
NEK 606:2004
IEC 60331-21

VOLTAGE RATING

3.6/6kV

CABLE CONSTRUCTION

Conductors: Circular tinned annealed stranded copper to IEC 60228 class 2.

Conductor Screen: Semi conducting material.

Insulation: Mica tape + Halogen free EPR.

Insulation Screen: Semi conducting material and tinned copper wire braid.

Bedding: Halogen free compound.

Armour: Tinned copper wire braid.

Outer Sheath: Halogen free thermosetting compound, SHF2 (for TYPE P6), or halogen free mud resistant thermosetting compound, SHF MUD (for TYPE P6/P13), coloured red.

MECHANICAL PROPERTIES

Bending Radius: 15×OD (during installation); 9×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

TECHNICAL CHARACTERISTICS



Caledonian

NEK606 Caledonian Offshore & Marine Cables Fire Resistant Medium Voltage Power Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum DC Resistance @20°C	Continuous Current Rating @45°C 3/4 Core	Short Circuit Current 1s
mm ²	mm	Ohm/km	A	A
185	17.0	0.1	26470	26470

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Approx. Overall Diameter	Approx. Weight
No.×mm ²	mm	mm	mm	mm	kg/km
3×185	2.5	1.6	3.4	78.6	12010