




Caledonian

NEK606 Caledonian Offshore & Marine Cables Medium Voltage Power Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

P102 (Formerly P2 or P2/P9) RFOU/TFOU 3.6/6KV

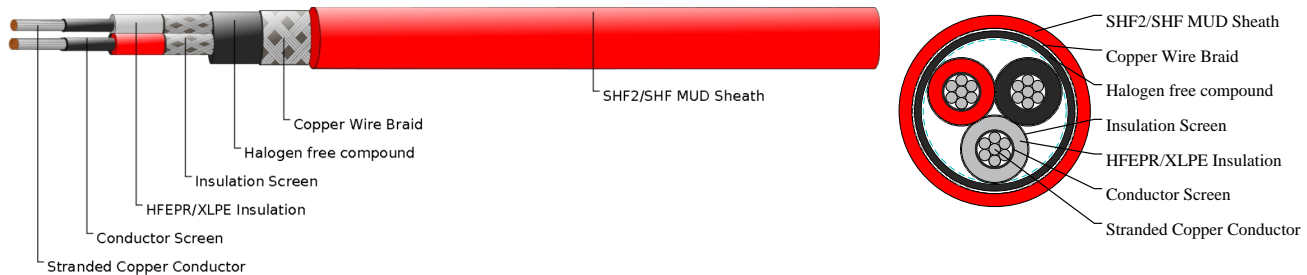

APPLICATIONS

These cables are flame retardant, low smoke, halogen free and mud resistant, used for fixed installation for medium voltage power.

STANDARDS

IEC 60092-354

IEC 60092-351

IEC 60092-359

IEC 60332-1

IEC 60332-3-22

IEC 60754-1,2

IEC 61034-1,2

NEK 606:2004

VOLTAGE RATING

3.6/6KV

CABLE CONSTRUCTION

Conductors: Circular tinned annealed stranded copper to IEC 60228 class 2.

Conductor Screen: Semi conducting material.

Insulation: Halogen-free EPR. XLPE can be offered as an option (for TFOU cable).

Insulation Screen: Semi conducting material and tinned copper wire braid.

Bedding: Halogen free compound.

Armour: Tinned copper wire braid.

Outer Sheath: Halogen free thermosetting compound, SHF2 (for TYPE P2), or halogen free mud resistant thermosetting compound, SHF MUD (for TYPE P2/P9), coloured red.

MECHANICAL PROPERTIES

Bending Radius: 15×OD (during installation); 9×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

TECHNICAL CHARACTERISTICS



Caledonian

NEK606 Caledonian Offshore & Marine Cables Medium Voltage Power Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum DC Resistance @20°C	Continuous Current Rating @45°C 3/4 Core	Short Circuit Current 1s
mm ²	mm	Ohm/km	A	A
25	6.5	0.0734	89	3580

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Approx. Overall Diameter	Nominal Copper Weight
No.×mm ²	mm	mm	mm	mm	kg/km
3×25	2.5	1.2	2.4	45.4	3390