





Caledonian

NEK606 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

P108 (Formerly P15) UX

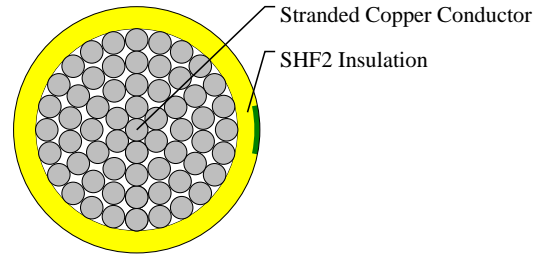

APPLICATIONS

These cables are flame retardant, low smoke and halogen free, used for earthing and bonding services.

STANDARDS

IEC 60092-353
IEC 60092-360
IEC 60332-1
IEC 60332-3-22
IEC 60754-1,2
IEC 61034-1,2
NEK 606:2016

VOLTAGE RATING

0.6/1KV

CABLE CONSTRUCTION

Conductors: Tinned annealed stranded copper to IEC 60228 class 2 or class 5.
Insulation: Halogen free thermosetting compound, SHF2.yellow/green.

MECHANICAL PROPERTIES

Bending Radius: 8×OD (during installation); 6×OD (fixed installed)
Temperature Range: -20°C ~ +90°C

TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum DC Resistance @20°C	Continuous Current Rating @45°C 1 Core	Short Circuit Current 1s
mm ²	mm	Ohm/km	A	A
240	19.6	0.0762	522	34340

DIMENSION AND PARAMETERS



Caledonian

NEK606 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Approx. Overall Diameter	Nominal Copper Weight
No. × mm ²	mm	mm	kg/km
1 × 240	2.2	24.7	2420