



Caledonian



PAS 5308 Instrumentation Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

PAS 5308 Part 2 / Type 1 (Unarmoured Cables)

PVC-OS-PVC Stranded Conductor 3C0.5

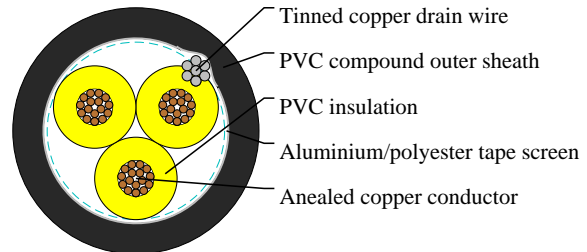

APPLICATIONS

These cables are designed to connect electrical instrumentation and communication systems in and around process plants and similar applications. Generally used to transmit analogue or digital signals in measurement and process control where chemicals may be present.

CABLE CONSTRUCTION

Conductor: Annealed copper, multistranded (Class 5) to BS EN 60228

Insulation: PVC to BS EN 50290-2-21:2002, grade TI51

Binder tape: Non-hygroscopic binder tape of minimum thickness 0.023 mm

Collective screen: Aluminium/polyester tape is applied over the laid up pairs metallic side down in contact with tinned copper drain wire, 0.5mm²

Outer sheath: Extruded sheath of a PVC compound conforming to BS EN 50290-2-22:2002, grade TM51

COLOUR CODE

Insulation: up to 40 cores yellow with black numbers, 41 - 80 cores black with yellow numbers

Outer Sheath: Generally black

PHYSICAL AND THERMAL PROPERTIES

Temperature range:

above 0°C (fixed installation)

-15°C to +65°C (during operation)

Electrical Properties

Conductor Area Size: 0.5 mm²

Conductor Stranding (No. x mm): 16 x 0.2

Conductor resistance (max): 39.7 ohm/km

Insulation resistance (min):

Individual conductor: 5 Gohm/km

Individual screen: 1 Mohm/km

Max. L/R Ratio for adjacent cores (Inductance/Resistance): 25 μH/ohm

Test voltage: 2000 V



Caledonian

PAS 5308 Instrumentation Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Rated voltage:300/500 V

DIMENSION AND PARAMETERS

No. of Cores	Nominal Cross-sectional Area	No. and Dia. of Wires	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter
	mm ²	no./mm	mm	mm	mm
3	0.5	16/0.2	0.6	0.8	6.3