



# Caledonian

Railway Cables



www.caledonian-cables.com

marketing@caledonian-cables.com

## 0.75KV Fire Survival Mineral Insulated Multicore LSZH Cables to EME-SP-14-028

Heavy Duty 0.75KV Grade

RF14028H-MICC-450/750V-12G2.5S

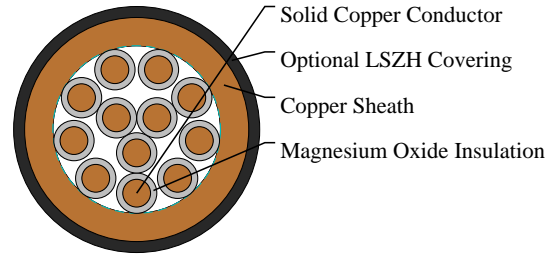

### APPLICATIONS

These fire survival cables are designed for installation in hazardous installations and radioactive environments.

### STANDARDS

EME SP 14 028

BS 6387 CWZ

BS 5839-1 Standard

BS 5839-1 Enhanced

BS 7346-6

BS EN 60702

### VOLTAGE RATING

750V

### CABLE CONSTRUCTION

Conductors: Solid plain copper conductors.

Insulation: Magnesium Oxide.

Outer sheath: Plain copper sheath with optional LSZH covering.

### PHYSICAL AND THERMAL PROPERTIES

Minimum Bending Radius: 2 x OD(D<7); 3 x OD(7 ≤ D<12); 4 x OD(12 ≤ D<15); 6 x OD(D ≥ 15)

Temperature Range: -80°C to +105°C

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Conductor Diameter	Cross Sectional Area of Copper Sheath	Nom. Overall Diameter	Approx. Weight	Max. DC Resistance at 20°C
No.×mm <sup>2</sup>	mm	mm <sup>2</sup>	mm	kg/km	Ω/km
12 x 2.5	1.77	34	17.9	970	7.41



**Caledonian**

Railway Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)



Highly Flexible



Impact Resistant



Insulation  
Integrity FE180



Laid In Ducts



Oil Resistant



Water Resistant