



# Caledonian



Railway Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## 11KV LSZH Power Cables to BS 7835

RF7835-RHZ1MZ1-6.35/11KV-1G300SAL

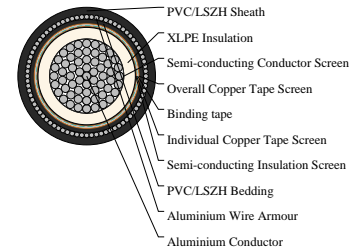

## APPLICATIONS

The cables are power cables for power networks, underground, outdoors and in cable ducting, in particular for installation where fire, smoke emission and toxic fumes create a potential threat.

## STANDARDS

BS7835

BS EN 50267-2-1

## CABLE CONSTRUCTION

Conductor: Class 2 stranded Aluminium conductor to BS EN 60228:2005 (previously BS6360)

Conductor Screen: Semi-conducting material

Insulation: XLPE Type GP8 to BS7655

Insulation Screen: Semi-conducting material

Metallic Screen: Individual and overall copper tape screen to BS6622

Filler: PETP (Polyethylene Terephthalate) fibres

Separator: Binding tape

Bedding: LSZH

Armour: Aluminium wire armoured (AWA)

Sheath: LSZH

## PHYSICAL AND THERMAL PROPERTIES

Minimum Bending Radius: 15xOD

Temperature Range: 0°C to +90°C (during operation); 0°C to +60°C (during installation)

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Nom. Overall Diameter	Approx. Weight	Max. DC Resistance at 20°C
No. × mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km
1 x 300	3.4	1.2	2.2	54.4	3600	0.0601



# Caledonian

## Railway Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)



Fire Retardant  
NF C32-070-2,2(C1)  
IEC 60332-3-2,4/EN 50266-2,4



Flame Retardant  
NF C32-070-2,1(C2)  
IEC 60332-1-3/EN 50265-2-1



Low Corrosivity  
IEC 60754-2/EN 50267-2,2,3  
NF C32-074/NF C20-453



Low Smoke Emission  
IEC 61034-2 / EN 50268-2  
NF C32-073/NF C 20-462



Low Toxicity



Zero Halogen  
IEC 60754-1/EN 50267-2-1  
NF C20-454