



# Caledonian



Railway Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## 33KV LSZH Power Cables to BS 6622/BS 7835

RF6622-RHVMV-19/33KV-1G150SAL

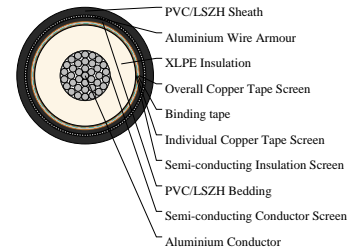

### APPLICATIONS

The cables are power cables for power networks, underground, outdoors and in cable ducting.

### STANDARDS

BS 6622 (PVC)

BS 7835 (LSZH)

### VOLTAGE RATING

19/33KV

### CABLE CONSTRUCTION

Conductor: Class 2 stranded aluminium conductor to BS EN 60228:2005 (previously BS6360)

Conductor Screen: Semi-conducting material

Insulation: XLPE (Cross-Linked Polyethylene) Type GP8 to BS7655

Insulation Screen: Semi-conducting material

Metallic Screen: Individual and overall copper tape screen to BS6622

Filler: PETP (Polyethylene Terephthalate) fibres

Separator: Binding tape

Bedding: PVC Type TM1 to BS7655 or LSZH

Armour: Aluminium wire armoured (AWA)

Sheath: PVC Type TM1 to BS7655 or LSZH

### PHYSICAL AND THERMAL PROPERTIES

Minimum Bending Radius: 15xOD

Temperature Range: 0°C to +90°C (during operation); 0°C to +60°C (during installation)

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Inner Sheath Thickness	Nominal Outer Sheath Thickness	Nom. Overall Diameter	Approx. Weight	Max. DC Resistance at 20°C
No.×mm <sup>2</sup>	mm	mm	mm	mm	kg/km	Ω/km



# Caledonian

## Railway Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

1 x 150	8	1.3	2.4	47.3	2600	0.124
---------	---	-----	-----	------	------	-------



Fire Retardant  
NF C32-070-2.2(C1)  
IEC60332-3-24/EN50266-2-4



Flame Retardant  
NF C32-070-2.1(C2)  
IEC60332-1-2/EN50265-2-1




Low Corrosivity  
IEC60754-2/EN50267-2-2/3  
NF C32-074/NF C20-453



Low Smoke Emission  
IEC 61034-2 / EN 50268-2  
NF C32-073/NF C 20-902



Low Toxicity



Zero Halogen  
IEC 60754-1/EN 50267-2-1  
NF C20-454