



**Caledonian**



Railway Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## G7623 Trackside Communications Cables

RS7623A2-HH-1P0.5

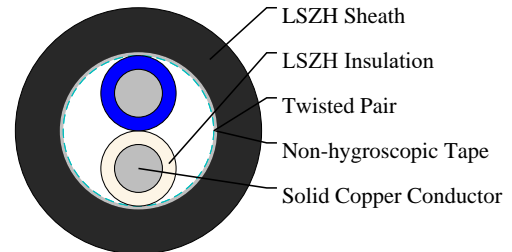

### APPLICATIONS

The cables are designed for limited fire hazard applications for internal use within stations, buildings and equipment rooms.

### STANDARDS

LUL Spec G7623 A2

### VOLTAGE RATING

750V DC/450V AC

### CABLE CONSTRUCTION

Conductors: Tinned annealed solid copper.

Insulation: LSZH Insulation.

Cabling Element: Two insulated conductors are twisted together to form a pair.

Stranding: Cables are composed of unit stranding.

Core wrapping: Non-hygroscopic plastic tape with overlapping.

Outer sheath: LSZH sheath.

### COLOUR CODE

Colour scheme, unit binder colour and cable make-up according to G7623

### PHYSICAL AND THERMAL PROPERTIES

Minimum Bending Radius: 7.5xOD

Temperature Range: -30°C to +70°C (during operation); -10°C +55°C (during installation)

### Electrical Properties

Electrical Characteristics at 20°C:

Nominal Conductor Diameter: 0.5mm

Maximum Conductor Resistance: 98 Ω/km

Minimum Insulation Resistance @500 V DC: 120 MΩ.km

Maximum Average Mutual Capacitance @1KHz: 80 nF/km

Maximum Average Capacitance Unbalance @800Hz pair-to-pair: 500



# Caledonian

## Railway Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Test Voltage AC 1min:500V

### DIMENSION AND PARAMETERS

| No. of Pairs | Conductor Diameter | Nominal Diameter over Insulation | Nominal Outer Sheath Thickness | Nom. Overall Diameter | Approx. Weight |
|--------------|--------------------|----------------------------------|--------------------------------|-----------------------|----------------|
|              | mm                 | mm                               | mm                             | mm                    | kg/km          |
| 1            | 0.5                | 0.82                             | 1.3                            | 6                     | 30             |




Buried in Ground



Fire Retardant  
NF C32-070-3-2(C1)  
IEC60332-3-24/EN50266-2-4



Flame Retardant  
NF C32-070-3-1(C2)  
IEC60332-1-2/EN50265-2-1



Laid In Ducts



Low Corrosivity  
IEC60754-2/EN50367-2-2/3  
NF C32-074/NF C20-453



Low Smoke Emission  
IEC 61034-2 / EN 50268-2  
NF C32-073/NF C 20-902




Low Toxicity



Mineral Oil Resistant



Rated voltage



Zero Halogen  
IEC 60754-1/EN 50267-2-1  
NF C20-454