



Caledonian

Railway Cables


www.caledonian-cables.com

marketing@caledonian-cables.com

Firerail Databus Cables For Railway Applications

Integrated 20 Cores 0.75mm sq UIC Databus Cables

FRA-UIC-4Q1S+2P0.75S

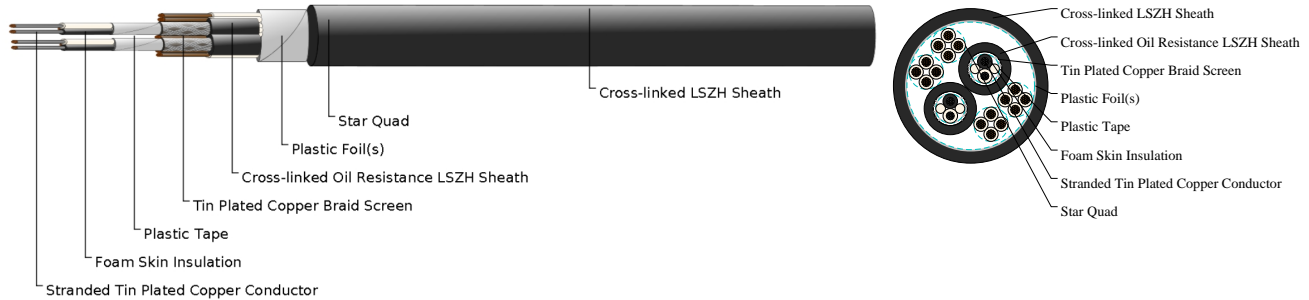

APPLICATIONS

The cables are used as connecting cables to transmit digital signals inside railway rolling stocks.

STANDARDS

DIN 5510-1

CABLE CONSTRUCTION

For 20 cores UIC databus cables:

Star Quad: Four LSZH insulated 1mm² stranded tinned copper conductors are twisted to form a star quad.

UIC Data Bus 0.75mm²: Two foam skin insulated tinned copper stranded conductors are twisted together with two filling elements to form a pair.

Wrapping: Overlapped plastic-foil(s).

Screen: Tinned copper wire braid screen.

Element sheaths: TPE.

Wrapping: Overlapped plastic-foil(s).

Stranding: 4 star quads are stranded together with 2 or 4 UIC data bus cable and several fillers.

Core Wrapping: Overlapped plastic-foil(s).

Screen: Tinned copper-wire braid screen.

Outer Sheath: Cross-linked oil resistant LSZH compound.

PHYSICAL AND THERMAL PROPERTIES

Minimum Bending Radius: 6xOD (single); 12xOD (multiple)

Temperature Range: -40°C to +90°C (during operation); -20°C +50°C (during installation)

Electrical Properties

Electrical Characteristics at 20°C:

Nominal Cross Section: 0.75 mm²

No of Strand/Strand Diameter: 19/0.22

Maximum Conductor Resistance: 26.7 Ω/km

Impedance@1.0-10MHz: 120+/-12 Ω



Caledonian

Railway Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Maximum Attenuation @1MHz:10 dB/km

Maximum Attenuation @1.5MHz:13 dB/km

Maximum Attenuation @2MHz:14 dB/km

Maximum Attenuation @3MHz:18 dB/km

Maximum Transfer Impedance:30 mΩ/m

Nominal Voltage Rating:300 V

Nominal Cross Section:1 mm²

No of Strand/Strand Diameter:19/0.25

Maximum Conductor Resistance:20 Ω/km

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
No.×mm ²	mm	mm	kg/km
4 x 4 x 1.0+ 2 x 2 x 0.75	1.8	23	530



Fire Retardant
NF C32-070-2.2(C1)
IEC60332-3-24/EN50266-2-4



Flame Retardant
NF C32-070-2.1(C2)
IEC60332-1-2/EN50265-2-1



Highly Flexible



Impact Resistant



Low Corrosivity
IEC60754-2/EN50267-2-2/3
NF C32-074/NF C20-453




Low Smoke Emission
IEC 61034-2 / EN 50268-2
NF C32-073/NF C 20-902



Low Toxicity




Oil Resistant



UV Resistant



Water Resistant



Zero Halogen
IEC 60754-1/EN 50267-2-1
NF C20-454