



Caledonian

Railway Cables



www.caledonian-cables.com

marketing@caledonian-cables.com

K209B LSZH Armoured Optical Fiber Cables

Multimode Fibres From 6 to 36 OF – 50/125

RO/K209B-ML-C-9-1x6-SR-(STA)H

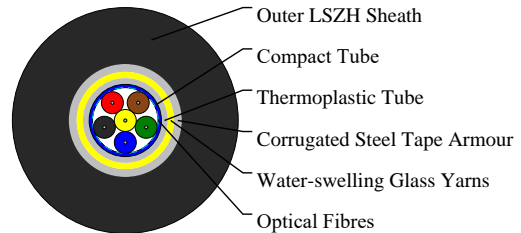

APPLICATIONS

The cables are designed for long distance telecommunication and using optical fibres in urban railways infrastructure. These low smoke halogen-free cables are laid on hooks, pulled through ducts or cable trays.

STANDARDS

RATP K209B or RATP K209A

CABLE CONSTRUCTION

Compact Tube: 6 or 12 singlemode optical fibres G652 or multimode fibers assembled under thermoplastic “peelable” skin. Tube diameter: 1mm.

Filling: Water-swelling yarns.

Tube: Thermoplastic

Peripheral Strength Member: Water-swelling glass yarns.

Armour: Corrugated steel tape armour 25/100.

Sheath: LSZH

PHYSICAL AND THERMAL PROPERTIES

Bending Radius: 20 x OD

Temperature Range: -40°C to +60°C (during operation); -10°C +60°C (during installation)

Electrical Properties

Electrical Characteristics at 20°C:

Optical & Geometrical Properties for Multimode Fibers 50/125

Maximum Attenuation

@850nm: ≤2.5 dB/km

@1300nm: ≤0.7 dB/km

Maximum Chromatic Dispersion

@850nm ≥500 MHz*km

@1300nm ≥800 MHz*km

Numerical Aperture: 0.20±0.015



Caledonian

Railway Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Core Diameter: 50 ± 3 μm

Cladding Diameter: 125 ± 2 μm

Core/Cladding Concentricity Error(Offset): ≤ 1.5 μm

Coating-Clad Concentricity Error(Offset): ≤ 8 μm

Core Non-Circularity: $\leq 6\%$

Cladding Non-Circularity $\leq 21\%$

Coating Diameter: 245 ± 10 μm

Proof-Test Level :100 (0.7)Kpsi (GN/m²)

DIMENSION AND PARAMETERS

No. of fibres	No. of Tubes × No. of Fibres/Tube	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
		mm	mm	kg/km
6	1 tubes of 6 OF	1.8	13	112



Acid & Alkaline
Resistant



Fire Retardant
NF C32-070.2.2(C1)
IEC60332-3-24/EN50266-2.4



Flame Retardant
NF C32-070.2.1(C2)
IEC60332-1-2/EN50265-2.1



Impact Resistant



Laid In Cable Tray



Low Corrosivity
IEC60754-2/EN50267-2.2/3
NF C32-074/NF C20-453



Low Smoke Emission
IEC 61034.2 / EN 50268-2
NF C32-073/NF C 20-902



Low Toxicity



Mineral Oil Resistant



Zero Halogen
IEC 60754-1/EN 50267-2-1
NF C20-454