



# Caledonian


Railway Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## NSGAFOU Cables

RF602-NSGAFOU-1G6S

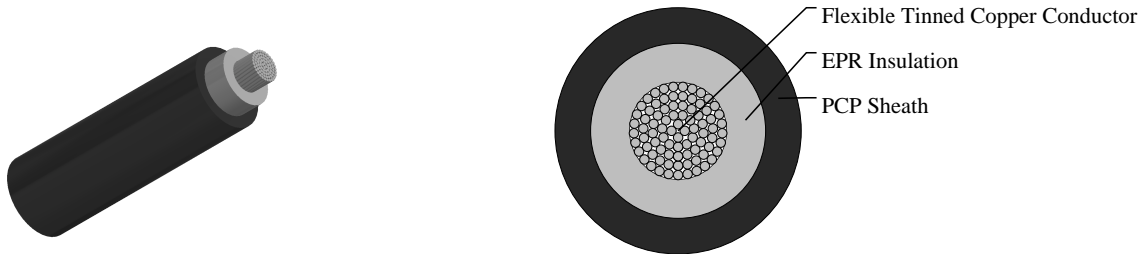

## APPLICATIONS

The cables are designed for use in switch cabinets, wiring of devices, trains and buses as well as in dry rooms.

## STANDARDS

DIN VDE 0250-602

## VOLTAGE RATING

1.8/3 KV

## CABLE CONSTRUCTION

Conductors: Flexible tinned copper to IEC 60228 class 5

Insulation: EPR type 3G13.

Outer sheath: PCP type 5GM3.

## PHYSICAL AND THERMAL PROPERTIES

Minimum Bending Radius: 4 x OD

Temperature Range: -25°C to +80°C (during operation); -10°C to +60°C (during installation)

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	No./Nominal Diameter of Strands	Nominal Insulation Thickness	Nom. Overall Diameter	Approx. Weight	Max. DC Resistance at 20°C	Current Rating
No. × mm <sup>2</sup>	no./mm	mm	mm	kg/km	Ω/km	A
1 x 6	84/0.3	1.3	8.3	118	3.39	75



Highly Flexible



Impact Resistant



Laid In Ducts



Oil Resistant



Water Resistant