



# Caledonian


EN 50264 Rolling Stock Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## FIREROL Standard Wall Single Core Screened & Sheathed Cables

EN 50264-2-1 (FRL-SW-3S-OS)

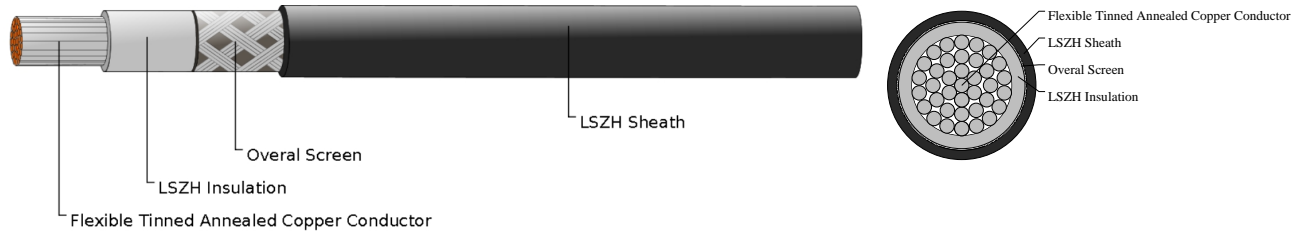

### APPLICATIONS

- Used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor.
- Used in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

### VOLTAGE RATING

1.8/3 kV

### CABLE CONSTRUCTION

Conductor: Flexible tinned annealed copper wires, stranded as per HD 383 (IEC 60228) class 5

Insulation: LSZH elastomeric compound as defined in EN 50264-1 (EI 101 to EI 104)

Overall Screen: Tinned annealed copper wires

Sheath: LSZH elastomeric compound as defined in EN 50264-1 (EM 101 to EM 104)

### MECHANICAL PROPERTIES

Max. Conductor Temperature: 90 °C ( fixed installation )

Min. Permissible Ambient Temperature: -25 °C/-40 °C ( fixed installation )

Bending Radius: 3 x Overall Diameter (D<12mm); 4 x Overall Diameter (D>12mm)

### CHEMICAL AND ENVIRONMENTAL PROPERTIES

|                        |   |
|------------------------|---|
| EN 60684-2             | No fluorine   |
| EN 50305; EN 60811-2-1 | Resistance to mineral oil & fuel oil, acid & alkali |
| EN 50305               | Resistance to ozone                                 |

### FIRE PERFORMANCE FOR ROLLING STOCK APPLICATION

|             |  |
|-------------|--|
| EN 50306-2  | Hazard levels HL1, HL2, HL3                      |
| DIN 5510-2  | Protection level 1/2/3/4                         |
| BS 6853     | Interior use 1a, 1b, II; Exterior use 1a, 1b, II |
| NF F 16-101 | F0   |



# Caledonian

EN 50264 Rolling Stock Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

|           |  |
|-----------|--|
| EN45545-2 | R15 Interior/ R16 Exterior HL1, HL2, HL3 |
|-----------|--|

## FIRE PERFORMANCE IN GENERAL

|   |   |
|---|---|
| EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)                                 | Vertical flame propagation for a single insulated wire or cable     |
| EN 50266-2-4 + EN 50305; IEC 60332-3-24;NF C 32-070 2.2 (C1); VDE 0472 Teil 804   | Vertical flame spread of vertically mounted bunched wires or cables |
| EN 50268-2; IEC 61034-2; NF C 32-073 ;NF C 20-902; NF F 16 101; VDE 0472 Teil 816 | Low Smoke Emission  |
| EN 50267-2-1; IEC 60754-1; NF C 32-074;NF C 20-454; VDE 0472 Teil 815             | Halogen Free  |
| EN 50267-2-2/3; IEC 60754-2; NF C 32-074;NF C 20-453; VDE 0472 Teil 813           | Low Corrosivity (Acidity & Conductivity)                            |
| EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853                                | Low Toxicity  |
| NF F 63 808; BS6853; NF F 16 101  | Smoke Index   |
| EN45545-2   | Requirement for fire behavior of materials & components R15/R16     |

## DIMENSION AND PARAMETERS

| Nominal Cross-sectional Area | Conductor Diameter | Min. Mean Thickness of Insulation | Min. Mean Thickness of Sheath | Overall Diameter (min.) | Overall Diameter (max.) | Min. Wire Diameter of Screen | Approx. Weight | Max. Conductor Resistance at 20 °C | Min. Insulation Resistance at 20 °C | Min. Insulation Resistance at 90 °C |
|------------------------------|--------------------|-----------------------------------|-------------------------------|-------------------------|-------------------------|------------------------------|----------------|------------------------------------|-------------------------------------|-------------------------------------|
| mm <sup>2</sup>              | mm                 | mm                                | mm                            | mm                      | mm                      | mm                           | kg/km          | MΩ × km                            | MΩ × km                             | MΩ × km                             |
| 185                          | 17.5               | 2.4                               | 1.7                           | 24.75                   | 28.85                   | 0.31                         | 2190           | 0.1080                             | 200                                 | 2.0                                 |



# Caledonian

EN 50264 Rolling Stock Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)



Abrasion Retardant



Acid & Alkaline Resistant



Cold Resistant



Fire Retardant  
NF C32-070-2,2(C1)  
IEC60332-3-2,4/EN50266-2-4



Flame Retardant  
NF C32-070-2,1(C2)  
IEC60332-1-2/EN50265-2-1



Highly Flexible



Impact Resistant



IRM 902  
Mineral Oil Resistant



IRM 903  
Fuel Oil Resistant



Low Corrosivity  
IEC60754-2/EN50267-2-2/3  
NF C32-074/NF C20-453



Low Smoke Emission  
IEC 61034-2 / EN 50268-2  
NF C32-073/NF C 20-902



Low Toxicity  
EN 50305; NF X70-100/NF  
F63 808/TM1-04/BS 6853



Ozone Resistant



Resistance To Soldering Heat



UV Resistant



Zero Halogen  
IEC 60754-1/EN 50267-2-1  
NF C20-454