



# Caledonian


Rolling Stock Cables to French Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

## FIREROL Standard Wall Multicore Unscreened Cables

NF F 63-826 (FRF-SW-05M)

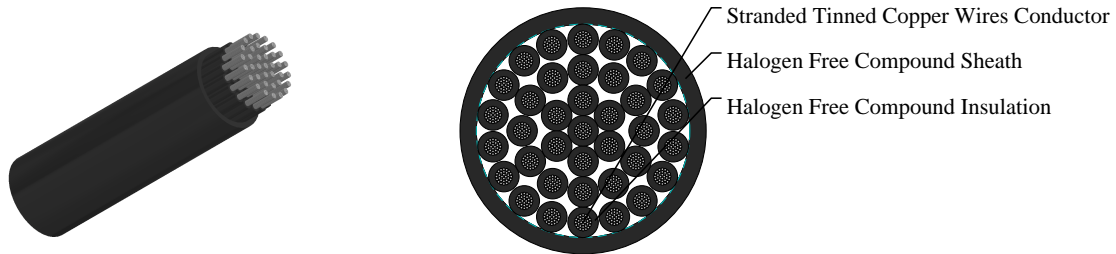

### APPLICATIONS

These cables are used as power and control cable for protected installations inside and outside of rail and transport vehicles, where handling and installation cost are an important factor, suitable for use in control, auxiliary and main circuit wiring such as cable harnesses, switchboards and control panels, driver desks etc.

### VOLTAGE RATING

500 V

### CABLE CONSTRUCTION

Conductor: Stranded tinned copper wires to IEC 60228 Class 5

Insulation: Halogen free compound

Sheath: Halogen free compound

### Electrical Properties

Max. Conductor Temperature: 90 °C/105 °C

Temperature Range: -25 °C~90 °C

Bending Radius: 4 × Overall Diameter

### FIRE PERFORMANCE FOR ROLLING STOCK APPLICATION

NF F 63-826

NF F 16-101

BS 6853

EN45545-2

### FIRE PERFORMANCE IN GENERAL

EN 50265-2-1; IEC 60332-1-2; NF C 32-070 2.1 (C2)	Vertical flame propagation for a single insulated wire or cable
EN 50266-2-4 + EN 50305; IEC 60332-3-24; NF C 32-070 2.2 (C1); VDE 0472 Teil 804	Vertical flame spread of vertically mounted bunched wires or cables
EN 50268-2; IEC 61034-2; NF C 32-073 ;NF C 20-902; NF F 16 101; VDE 0472 Teil 816	Low Smoke Emission



# Caledonian

Rolling Stock Cables to French Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

EN 50267-2-1; IEC 60754-1; NF C 32-074;NF C 20-454; VDE 0472 Teil 815	Halogen Free
EN 50267-2-2/3; IEC 60754-2; NF C 32-074;NF C 20-453; VDE 0472 Teil 813	Low Corrosivity (Acidity & Conductivity)
EN 50305; NF X 70-100; NF F 63 808; TM1-04; BS6853	Low Toxicity
NF F 63 808; BS6853; NF F 16 101	Smoke Index
EN45545-2	Requirement for fire behavior of materials & components R15/R16

## DIMENSION AND PARAMETERS


No. of Cores × Cross-sectional Area	No./Nominal Diameter of Strands	Nominal Sheath Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	kg/km
37×1.5	30/0.25	1.5	25.1	27.1	1170



Abrasion Retardant



Acid & Alkaline Resistant



Cold Resistant



Corona Resistant



Fire Retardant  
NF C32-070.2.2(C1)  
IEC60332-3-24/EN50266-2-4



Flame Retardant  
NF C32-070.2.1(C2)  
IEC60332-1-2/EN50265-2-1



Highly Flexible



IRM 902  
Mineral Oil Resistant



IRM 903  
Fuel Oil Resistant




Low Corrosivity  
IEC60754-2/EN50267-2-2/3  
NF C32-074/NF C20-453




Low Smoke Emission  
IEC 61034-2-1/EN 50268-2  
NF C32-073/NF C 20-902




Low Toxicity  
EN 50305; NF X70-100/NF  
F63 808/TM1-04/BS 6853



Ozone Resistant



Resistance To Soldering Heat



UV Resistant



Zero Halogen  
IEC 60754-1/EN 50267-2-1  
NF C20-454