



# Caledonian

Telephone Cables


www.caledonian-cables.com

marketing@caledonian-cables.com

## INDOOR TELEPHONE CABLES

PVC Insulated Jumper Wires to CW 1109

TP1109-Y-1W010

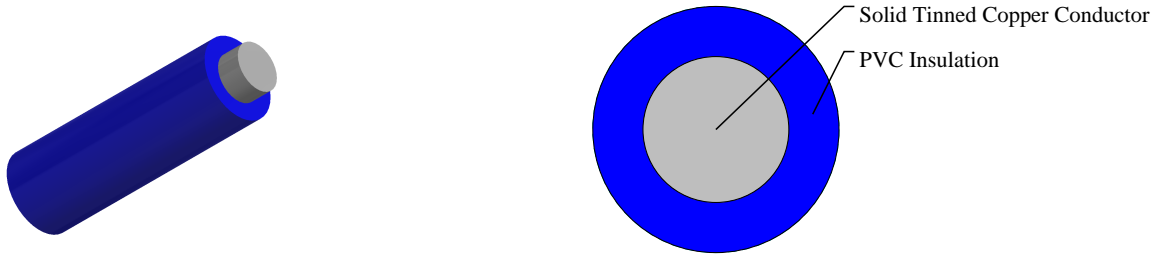

## APPLICATIONS

The jumper wires are used for interconnection between terminal blocks at main distribution frames (MDF), cross connection cabinets (CCP) and distribution frames or boxes.

## STANDARDS

CW 1109 (PVC T2)

## CABLE CONSTRUCTION

Conductors: Solid annealed tinned copper as per class 1 of BS 6360/IEC 60228.

Insulation: PVC Type 2 to BS 6746.

## COLOUR CODE

CW 1109 - as per IEC 60189-3

## PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +70°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 7.5 x Overall Diameter

## DIMENSION AND PARAMETERS

Caledonian Cable Code	No. of Cores	Conductor Size	Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter over Insulation (max.)	Overall Diameter (max.)	Approx. Weight
		mm <sup>2</sup>	mm	mm	mm	mm	kg/km
TP1109 - Y-1W010	1	0.785	1	0.25	1.7	1.7	6.5