



# Caledonian

Telephone Cables


www.caledonian-cables.com

marketing@caledonian-cables.com

## INDOOR TELEPHONE CABLES

PVC Insulated Jumper Wires to CW 1109

TP1109-Y-1W06

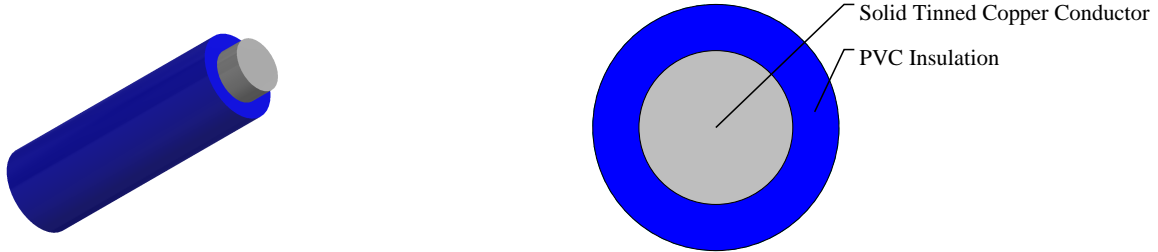

## APPLICATIONS

The jumper wires are used for interconnection between terminal blocks at main distribution frames (MDF), cross connection cabinets (CCP) and distribution frames or boxes.

## STANDARDS

CW 1109 (PVC T2)

## CABLE CONSTRUCTION

Conductors: Solid annealed tinned copper as per class 1 of BS 6360/IEC 60228.

Insulation: PVC Type 2 to BS 6746.

## COLOUR CODE

CW 1109 - as per IEC 60189-3

## PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +70°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 7.5 x Overall Diameter

## DIMENSION AND PARAMETERS

| Caledonian Cable Code | No. of Cores | Conductor Size  | Conductor Diameter | Nominal Insulation Thickness | Nominal Diameter over Insulation (max.) | Overall Diameter (max.) | Approx. Weight |
|-----------------------|--------------|-----------------|--------------------|------------------------------|---|-------------------------|----------------|
|                       |              | mm <sup>2</sup> | mm                 | mm                           | mm                                      | mm                      | kg/km          |
| TP1109 - Y-1W06       | 1            | 0.283           | 0.6                | 0.15                         | 1.05                                    | 1.05                    | 2.8            |