



Caledonian

Telephone Cables



www.caledonian-cables.com

marketing@caledonian-cables.com

INDOOR TELEPHONE CABLES

PVC Insulated Jumper Wires to CW 1109

TP1109-Y-2W06

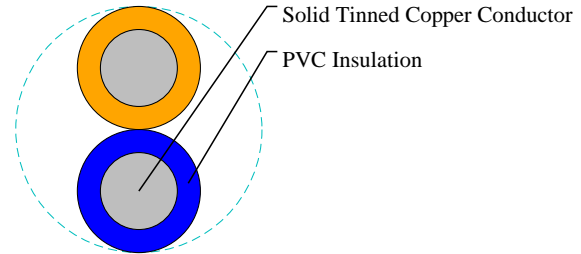

APPLICATIONS

The jumper wires are used for interconnection between terminal blocks at main distribution frames (MDF), cross connection cabinets (CCP) and distribution frames or boxes.

STANDARDS

CW 1109 (PVC T2)

CABLE CONSTRUCTION

Conductors: Solid annealed tinned copper as per class 1 of BS 6360/IEC 60228.

Insulation: PVC Type 2 to BS 6746.

COLOUR CODE

CW 1109 - as per IEC 60189-3

PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +70°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 7.5 x Overall Diameter

DIMENSION AND PARAMETERS

| Caledonian Cable Code | No. of Cores | Conductor Size | Conductor Diameter | Nominal Insulation Thickness | Nominal Diameter over Insulation (max.) | Overall Diameter (max.) | Approx. Weight |
|-----------------------|--------------|-----------------|--------------------|------------------------------|---|-------------------------|----------------|
| | | mm ² | mm | mm | mm | mm | kg/km |
| TP1109 - Y-2W06 | 2 | 0.283 | 0.6 | 0.15 | 1.05 | 1.75 | 5.6 |