



# Caledonian



Telephone Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## INDOOR TELEPHONE CABLES

PVC Insulated & PVC Sheathed Installation Cables to DIN VDE 0815/DIN 57815  
TP815J-YY-Bd-4P06

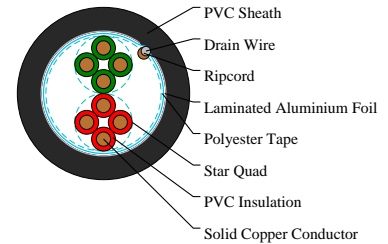

## APPLICATIONS

The installation cables are used for telephone and signal transmission for permanent surface or concealed installation in dry and damp rooms, on or under plaster, and on external walls.

## STANDARDS

DIN VDE 0815/DIN 57815

## CABLE CONSTRUCTION

Conductors: Solid annealed bare copper sized 0.6mm as per VDE 0295/IEC 60228 class 1.

Insulation: PVC Y11 type to DIN VDE 0207-2.

Cabling Element: Star Quads.

Cable Core Assembly: Each 4 wires are stranded into a star quad, the quads are stranded to units and the units are stranded to form the core.

Core Wrapping: One or more non-hygroscopic polyester tapes are helically or longitudinally laid with an overlap prior to sheathing.

Screen: Laminated aluminium foil is fully enclosing the core with an overlap.

Drain Wire: Tinned drain wire may be applied longitudinally to provide continuity of the screen.

Ripcord: Nylon ripcord may be placed parallel to the cores to facilitate sheath removal.

Sheath: PVC YM1 type to DIN VDE 0207 part 5.

## COLOUR CODE

Quads:

The single core is identified by black ring markings:

Side Circuit 1: a-wire without marking

b-wire 1 mark distance 17mm

Side Circuit 2: a-wire 2 marks distance 34mm

b-wire 2 marks distance 17mm

Subunits:

Basic colours of the wire insulation of the 5 star quads of a basic unit:

Quad 1 Red    Quad 2 Green    Quad 3 Grey    Quad 4 Yellow    Quad 5 White



# Caledonian

Telephone Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

The tracer units are coded with a red helix, all other units by a white binder.

## PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +70°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 7.5 x Overall Diameter

## DIMENSION AND PARAMETERS

Caledonian Cable Code	No. of Pairs	Conductor Size	Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter over Insulation	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
		mm <sup>2</sup>	mm	mm	mm	mm	mm	kg/km
TP815J -YY-Bd -4P06	4	0.283	0.6	0.2	1	1	6.5	59